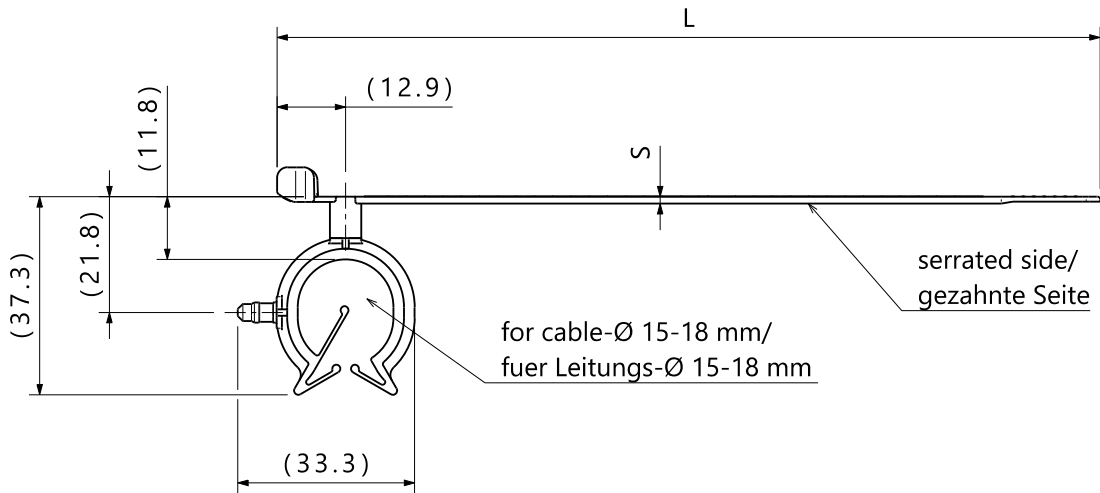
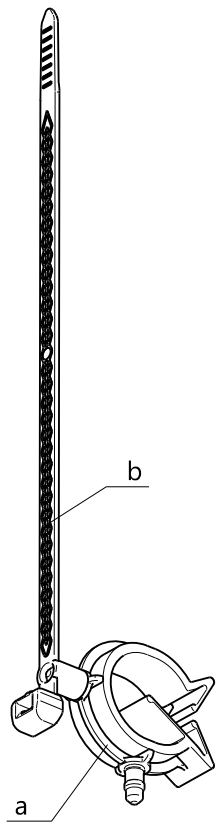


- Specification:

 - Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH
 - Material: a: PA6.6 impact resistant heatstabilized b: PA6.6 impact resistant heatstabilized
 - Material color: a: black b: black
- Spezifikation:

 - Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH
 - Material: a: PA6.6 schlagzaeh hitzestabilisiert b: PA6.6 schlagzaeh hitzestabilisiert
 - Material Farbe: a: schwarz b: schwarz

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Printed copy for information only/
Ausdruck nur zur Information

Line/ Zeile	Product type/ Artikelbezeichnung	Project no./ Projektnr.	Length/ Laenge L	Strap width/ Bandbreite B	Thickness/ Dicke S	Bundle/ Buendel Ø	Tensile force/ Schlaufenhaltekraft N min.	Project no./ Projektnr.		
								Semi-finished part/ Halbfabrikat	a	b
1	T50SOSASVCOC15-18ST	GPN 19-1973	155 ±5	4.6 ±0.2	1.3 ±0.2	2-35	200	OC15-18ST	X	X
								T50SOS-AS-VC		

Revision Level			Revision Record				The copyright of this drawing is reserved by HellermannTyton.	Drawn	Date (YYYY/MM/DD)	Title ...ASVCOC15-18ST	Scale 1:1										
Drawing	State	Part						I. Langeloh	2020/02/17			Global Project Number see table									
00.6	Design Release	00						Approved	Date (YYYY/MM/DD)												
Changed	Date (YYYY/MM/DD)					All drawing revisions are stored in CAD PDM database		U. Villbrandt	2020/02/17	Drawing-No 19-1973-001-CSG											
-	-										Format A2										
Approved	Date (YYYY/MM/DD)											Sheet 1 / 1									
-	-					Units mm							Drawing-No 19-1973-001-CSG								