Revision NO 变更数	Revisions 变更项	Changed 修改者	Date 日期	Approved 确认者	Date 日期
1	Drawing Update	Robert.Zhu	20161018	Roger.Chang	20161019
2	Drawing Update	Lance.Lv	20170103	Roger.Chang	20170531
3	Drawing NO. change from16-0503 to 19-2322	Lance.Lv	20191211	Kevin.Tang	20191211

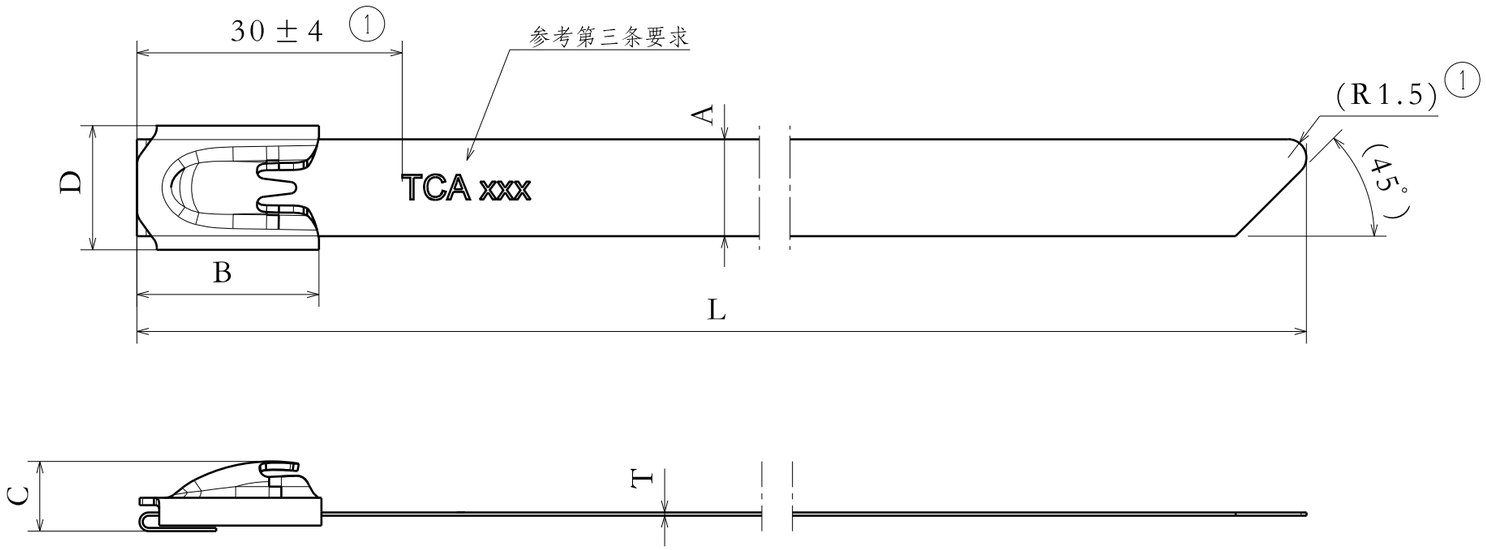

项目号 PROJECT NO	Product Code 型号	Cable Range(Max.) (Φmm) 最大捆绑直径	L	T	A	B	C	D	Material 材料	Temperature Range (After Bundle) 工作温度
3 19-2322	STB200M	Φ50	200.0±2.0	0.26±0.01	7.9±0.15	14.0±0.3	(5.7)	10.3±0.3	SS316 1	-80℃—+538℃
19-2323	STB360M	Φ102	360.0±2.0							
19-2325	STB520M	Φ152	520.0±2.0							
19-2326	STB680M	Φ203	680.0±2.0							
19-2327	STB840M	Φ254	840.0±2.0							
19-2328	STB1050M	Φ318	1050.0±2.0							

技术要求: 2
1.带体修边后毛刺量≤5%厚度
2.尾部形状，冲裁后毛刺量≤10%厚度
3.带体中间标识TCA 316或TCA 304，需要清晰可见，不能破坏带体;

Min. Loop Tensile Strength 最低拉伸强度
1115N

Dimension Units/尺寸单位
mm

PERFORMANCE/性能 SPECIFICATION/标准

CATIA V5

Drawn/制图	Robert.Zhu	2016-07-12
Approved/审核	Roger.Chang	2016-09-12

Scale/比例 NO /无

Title/品名
STB-XXXM SERIES

The copyright of this drawing is reserved by HellermannTyton.it is issued on condition that it is not reproduced,copied or disclosed to a third party,either wholly or in part,without the consent of HellermannTyton.

HellermannTyton
海尔曼太通（无锡）电器配件有限公司
(WUXI) Electrical Accessories Co.,Ltd.
Tel:+86-510-5282536
Fax:+86-510-5280112

Drawing-No/图号
19-2322-001-CSC 3

Format/格式
A3