
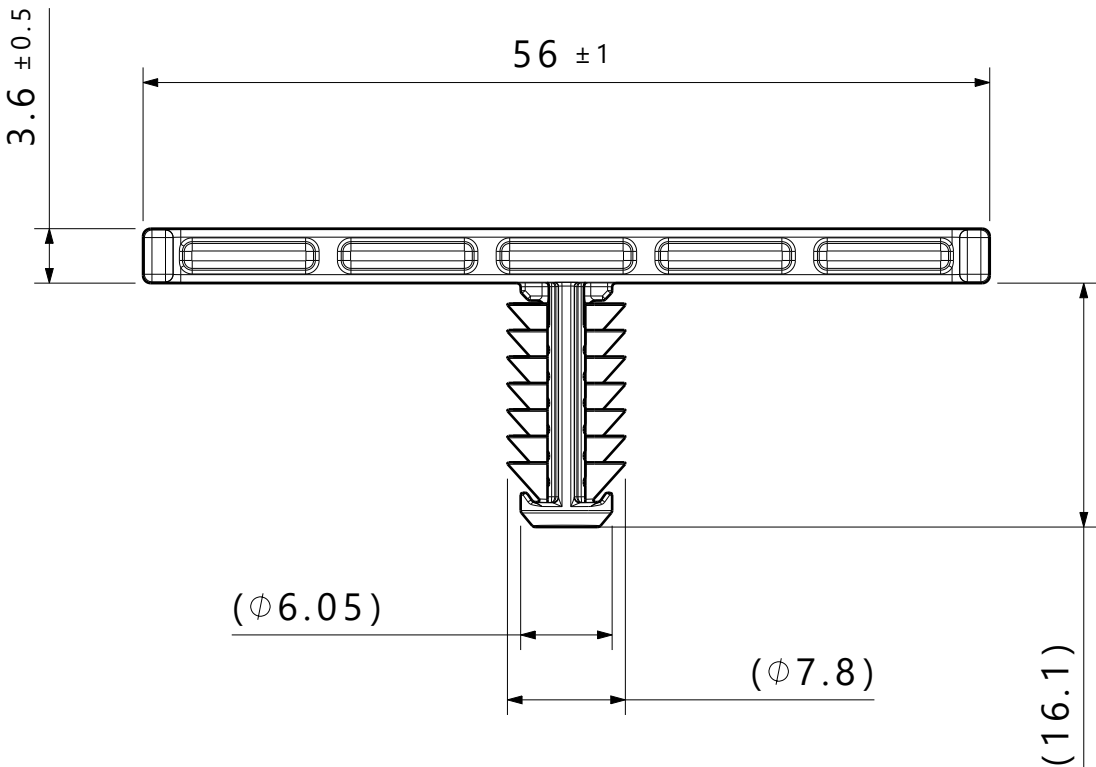
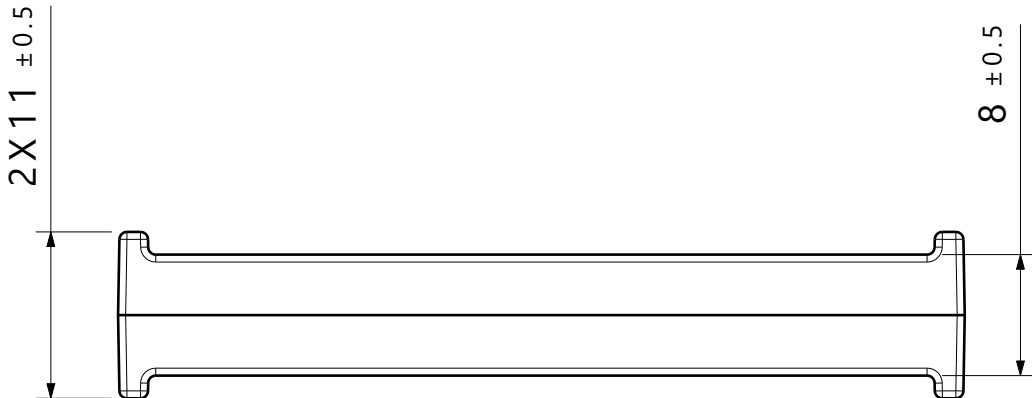


Isometric view
Scale 1:1



- Reference:
- Performance requirements at dry as molded:
1. Fir tree push in force: 45 newtons (10 lbf) max in the applicable nominal hole size and a plate thickness of 1.8mm.
 2. Fir tree pull out force: 110 newtons (25 lbf) min in the applicable nominal hole size and a plate thickness of 1.8mm.

- Notes:
1. Material: See chart
 2. Material color: See chart
 3. Maximum percent regrind permissible: 25%
 4. Max allowable flash to be: 0.5mm
 5. Max allowable mismatch to be: 0.1mm
 6. Sheet metal thickness range: 0.60mm - 6.00mm
 7. Applicable hole size:
A. 6.5mm +0.5/- 0.4

Revision Level			Revision Record	
Drawing	State	Part	ECN# 015682	
00.3	Design Release	-		
Changed	Date (YYYY/MM/DD)			
Rohde	2020/01/28			
Approved	Date (YYYY/MM/DD)			
Van Hulst	2020/01/29			

Revision Level			Revision Record	
Drawing	State	Part	ECN# 015682	
00.3	Design Release	-		
Changed	Date (YYYY/MM/DD)			
Rohde	2020/01/28			
Approved	Date (YYYY/MM/DD)			
Van Hulst	2020/01/29			

	The copyright of this drawing is reserved by HellermannTyton.
All drawing revisions are stored in CAD PDM database	

Drawn	Date (YYYY/MM/DD)
Haftarski	2020/1/15
Approved	Date (YYYY/MM/DD)
Rohde	2020/01/23

Units	HellermannTyton
mm	www.HellermannTyton.com

Global Part Description		Material	Color
BC56FT6.5-PA66HIRHSUV-BK		PA66HIRHSUV	Black
Title Heavy duty tape bar with 6.5mm fir tree		Scale	2:1
		Global Project Number 20-0094	
Drawing-No 20-0094-001-CSU		Format	A3
		Sheet	1 / 1