

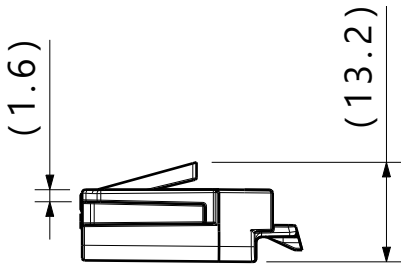
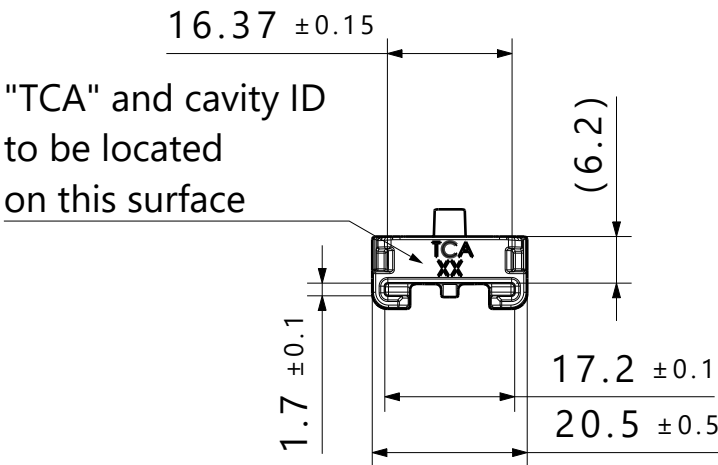


Isometric view



- Reference:
- Performance requirements at dry as molded:
- 1. Designed to meet push on/pull off forces of SAE/USCAR-2.
- Notes:
- 1. Material: See chart
 - 2. Material color: See chart
 - 3. Maximum percent regrind permissible: 25%
 - 4. Max allowable flash to be: 0.25mm
 - 5. Max allowable mismatch to be: 0.10mm
 - 6. Fits into USCAR clip slot specification EWCAP-005-23.

Global Part Description	Material	Color
23MM17MMCCADPT-PA66HIRHSUV-BK	PA66HIRHSUV	Black

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.	Drawn		Date (YYYY/MM/DD)	Title 17mm connector clip to 23mm connector clip adapter			Scale 1:1	
Drawing	State	Part	ECN #015863				Cottrill	2020/04/07	Global Project Number 20-0177					
00.0	Design Release	-	 All drawing revisions are stored in CAD PDM database				Approved		Date (YYYY/MM/DD)	Drawing-No 20-0177-001-CSU		Format A3		
Changed		Date (YYYY/MM/DD)				Van Hulst		2020/04/07 <th colspan="2">Sheet 1 / 1</th>	Sheet 1 / 1					
Cottrill		2020/04/07												
Approved		Date (YYYY/MM/DD)												
Van Hulst		2020/04/07					Units mm	HellermannTyton www.HellermannTyton.com						

HellermannTyton
www.HellermannTyton.com