


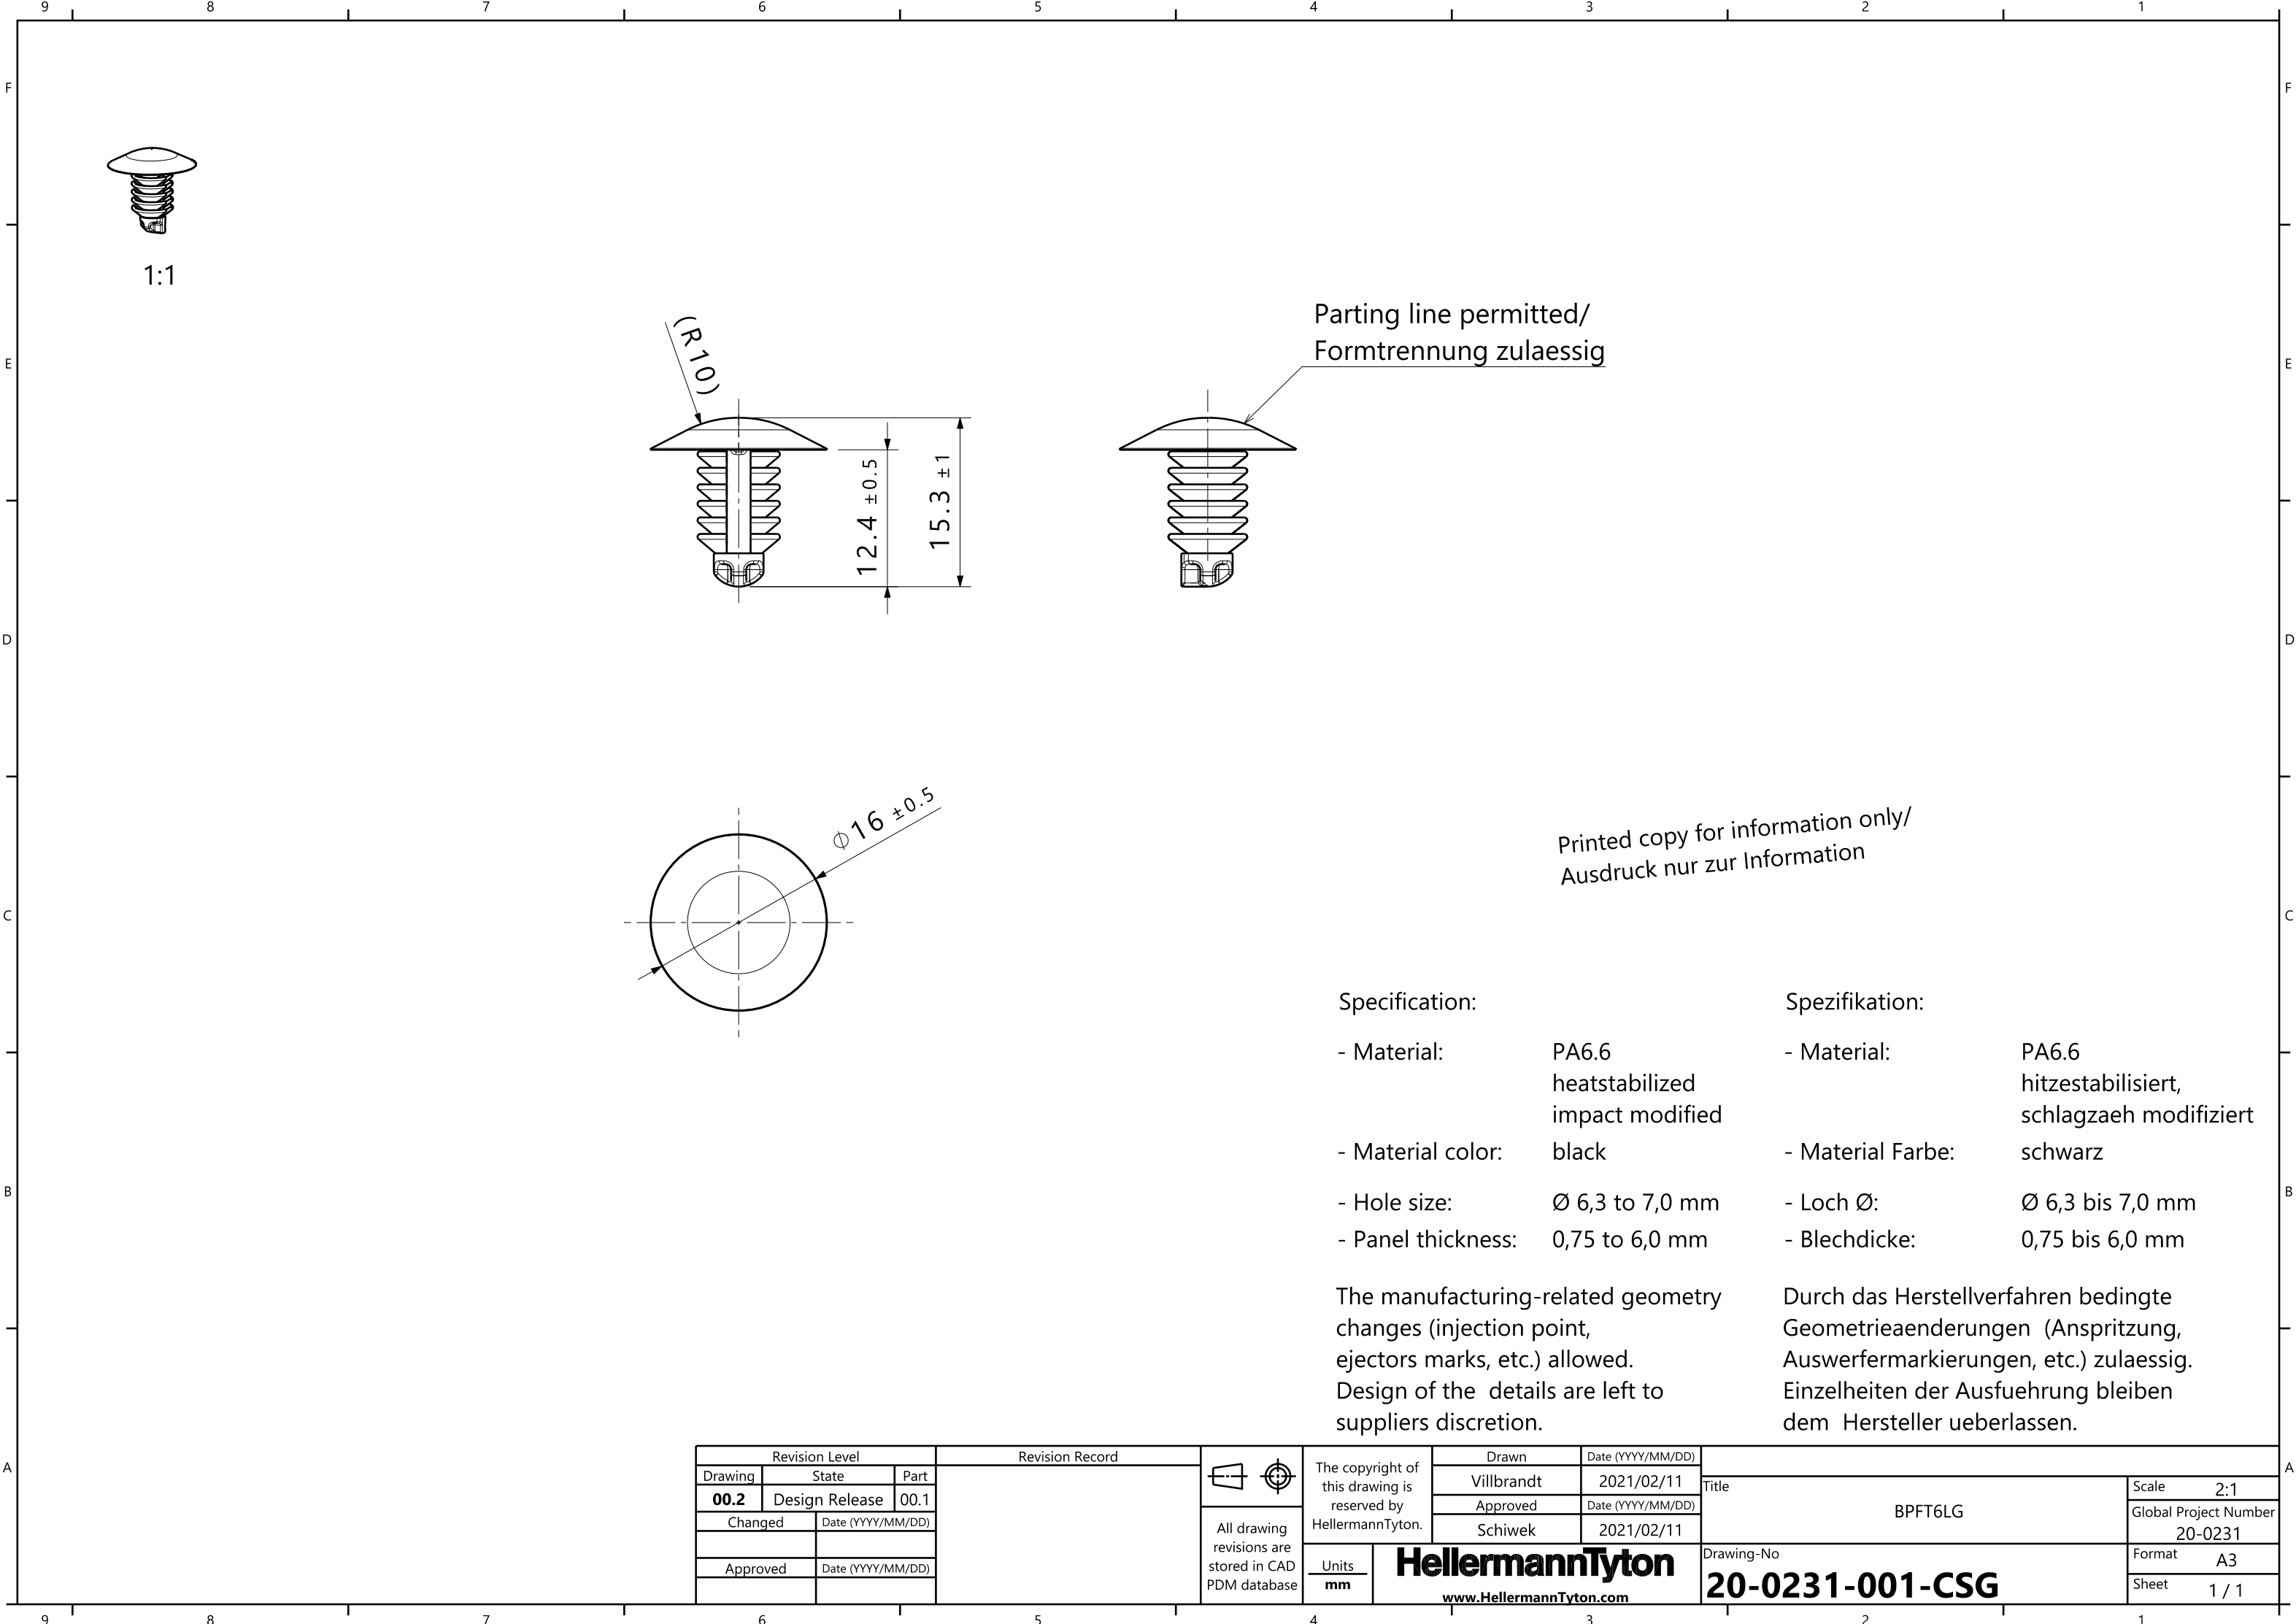

Printed copy for information only/
Ausdruck nur zur Information

Specification:

- Material: PA6.6
heatstabilized
impact modified
- Material color: black
- Hole size: Ø 6,3 to 7,0 mm
- Panel thickness: 0,75 to 6,0 mm

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Spezifikation:

- Material: PA6.6
hitzestabilisiert,
schlagzaeh modifiziert
- Material Farbe: schwarz
- Loch Ø: Ø 6,3 bis 7,0 mm
- Blechdicke: 0,75 bis 6,0 mm

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Revision Level			Revision Record		 All drawing revisions are stored in CAD PDM database	The copyright of this drawing is reserved by HellermannTyton.		Drawn	Date (YYYY/MM/DD)	Title BPFT6LG			Scale	2:1			
Drawing	State	Part						Villbrandt	2021/02/11				Global Project Number	20-0231			
00.2	Design Release	00.1						Approved	Date (YYYY/MM/DD)				Format	A3			
Changed		Date (YYYY/MM/DD)						Schiwek	2021/02/11				Sheet	1 / 1			
Approved		Date (YYYY/MM/DD)					Units mm HellermannTyton www.HellermannTyton.com			Drawing-No 20-0231-001-CSG							