
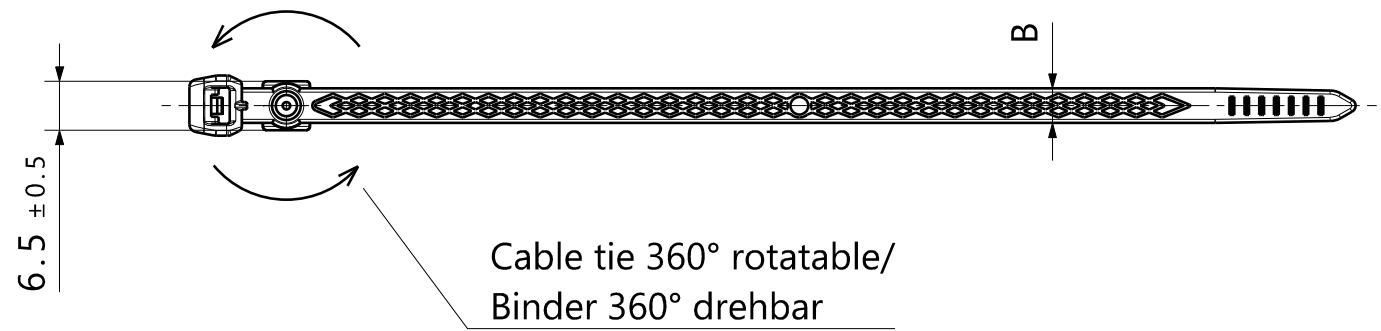
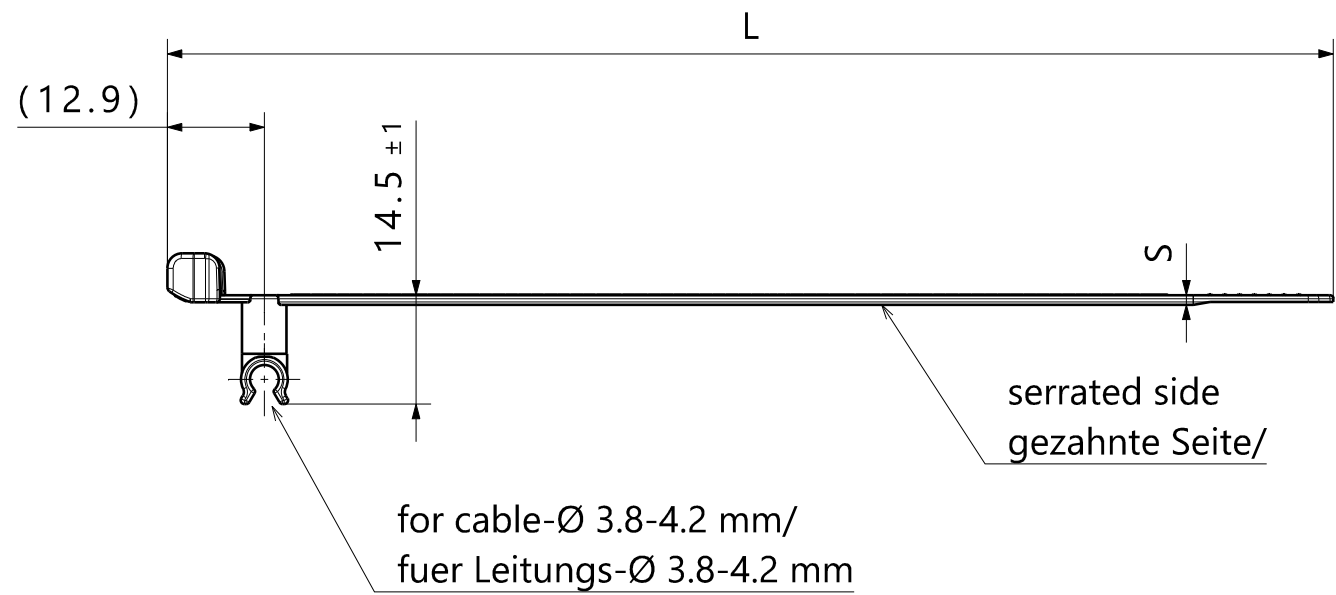


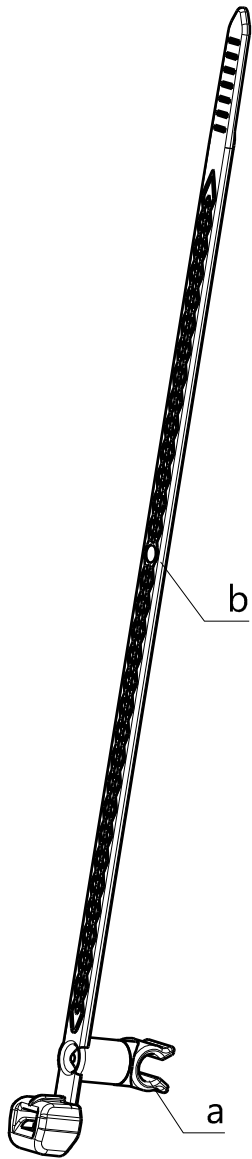

- Specification:

 - Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH
 - Material: a: PP b: PA6.6 impact resistant heatstabilized
 - Material color: a: natural b: black
- Spezifikation:

 - Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH
 - Material: a: PP b: PA6.6 schlagzaeh hitzestabilisiert
 - Material Farbe: a: natur b: schwarz

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Printed copy for information only/
Ausdruck nur zur Information

Line/ Zeile	Product type/ Artikelbezeichnung	Project no./ Projektnr.	Length/ Laenge L	Strap width/ Bandbreite B	Thickness/ Dicke S	Bundle/ Buendel Ø	Tensile force/ Schlaufenhaltekraft N min.			
1	T50SOSASVC4S	GPN 20-0642	155 ±5	4.6 ±0.2	1.3 ±0.2	2-35	200	X	X	

Revision Level			Revision Record			 	The copyright of this drawing is reserved by HellermannTyton.		Drawn		Date (YYYY/MM/DD)	Title ...ASVC4S		Scale 1:1	
Drawing	State	Part					All drawing revisions are stored in CAD PDM database	Units mm	A.Hiller	2020/03/26	Global Project Number see table				
00.2	Design Release	00							Approved	Date (YYYY/MM/DD)	Format A2				
Changed	Date (YYYY/MM/DD)								U. Villbrandt	2020/03/26	Sheet 1 / 1				
	-	-											Drawing-No 20-0642-001-CSG		
	-	-													

HellermannTyton
www.HellermannTyton.com