
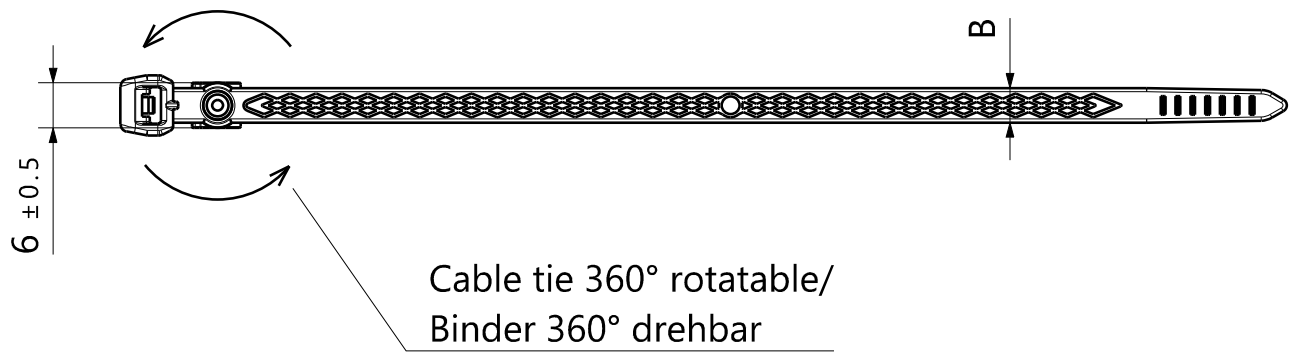
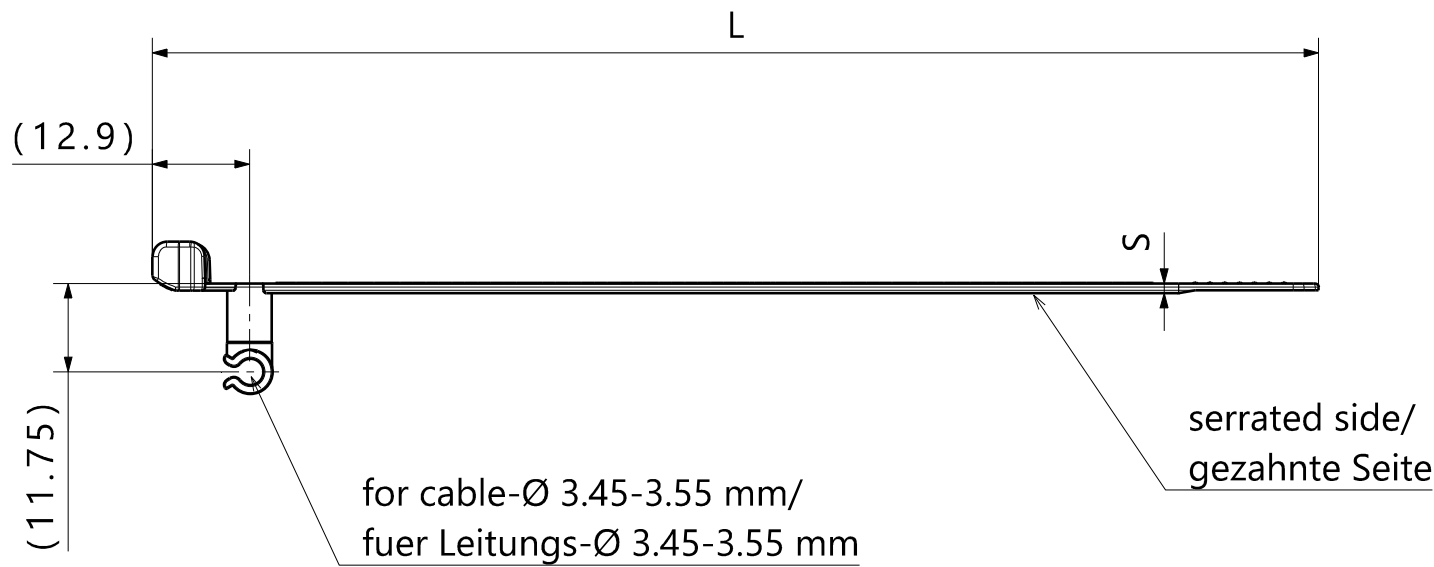


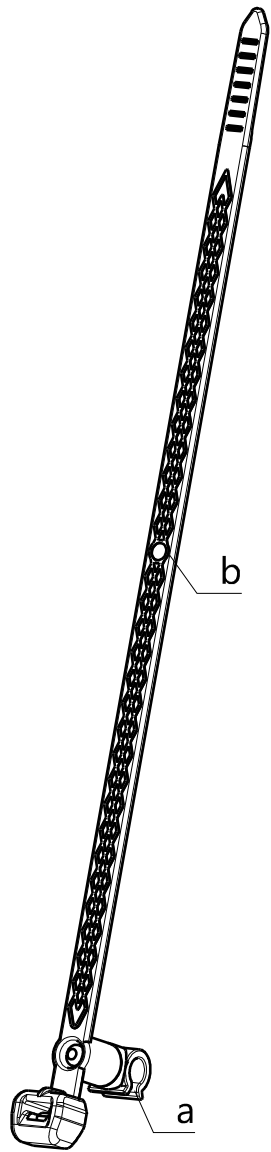

- Specification:

 - Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH
 - Material: a: PA6.6 impact resistant heatstabilized b: PA6.6 impact resistant heatstabilized
 - Material color: a: black b: black
- Spezifikation:

 - Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH
 - Material: a: PA6.6 schlagzaeh hitzestabilisiert b: PA6.6 schlagzaeh hitzestabilisiert
 - Material Farbe: a: schwarz b: schwarz

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Printed copy for information only/
Ausdruck nur zur Information

Line/ Zeile	Product type/ Artikelbezeichnung	Project no./ Projektnr.	Length/ Laenge L	Strap width/ Bandbreite B	Thickness/ Dicke S	Bundle/ Buendel Ø	Tensile force/ Schlaufenhaltekraft N min.	Project no./ Projektnr.		
1	T50SOSASVC3.5	GPN 20-0644	155 ±5	4.6 ±0.2	1.3 ±0.2	2-35	200	X	X	

Revision Level			Revision Record			 	The copyright of this drawing is reserved by HellermannTyton.		Title		Scale	
Drawing	State	Part	Project number semi finished part a corrected					Drawn	Date (YYYY/MM/DD)	...ASVC3.5	1:1	
01.1	Design Release	00						A.Hiller	2020/03/26			
Changed		Date (YYYY/MM/DD)						Approved	Date (YYYY/MM/DD)			
A.Hiller		2023/02/03	U. Villbrandt		2020/03/26	All drawing revisions are stored in CAD PDM database	Units mm	 www.HellermannTyton.com	Drawing-No			Global Project Number see table
Approved		Date (YYYY/MM/DD)			Format				A2			
B.Schiwek		2023/02/03			Sheet				1 / 1			
					20-0644-001-CSG							