
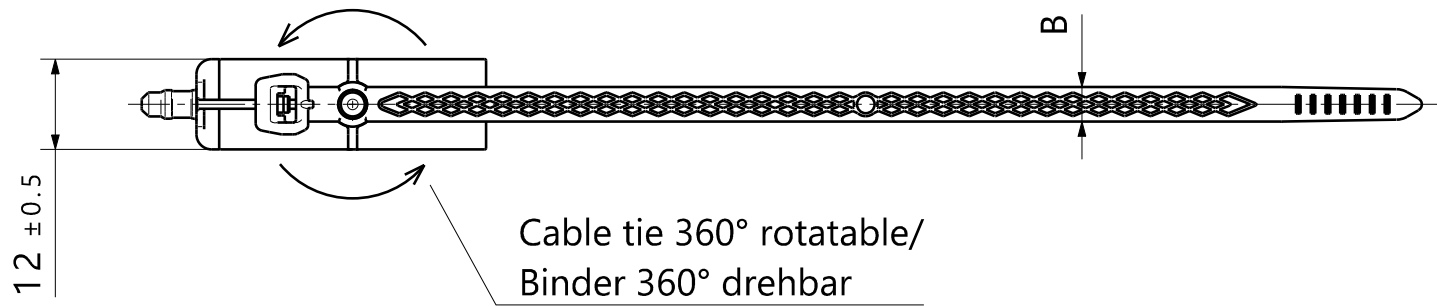
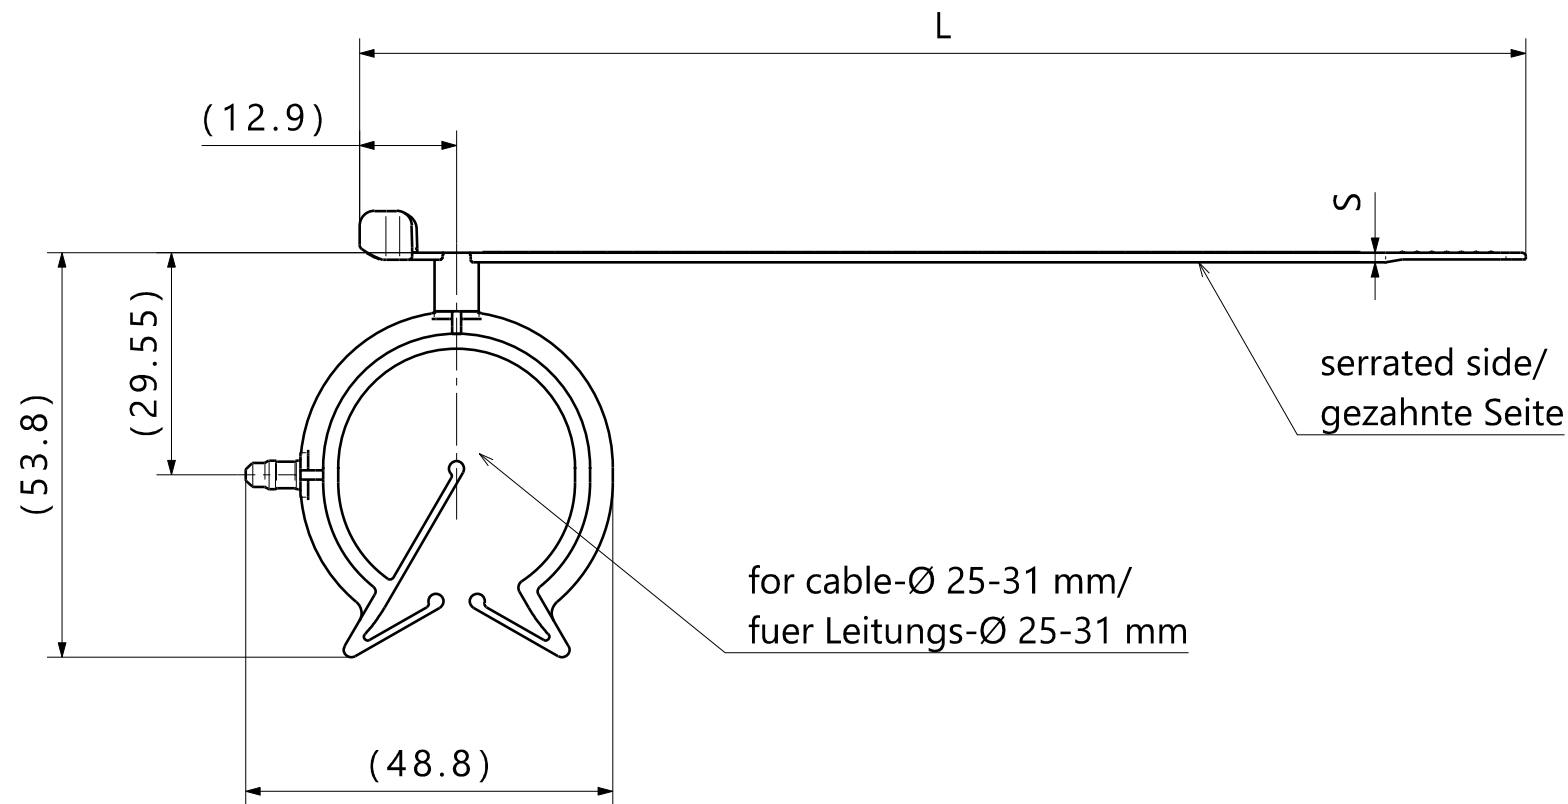


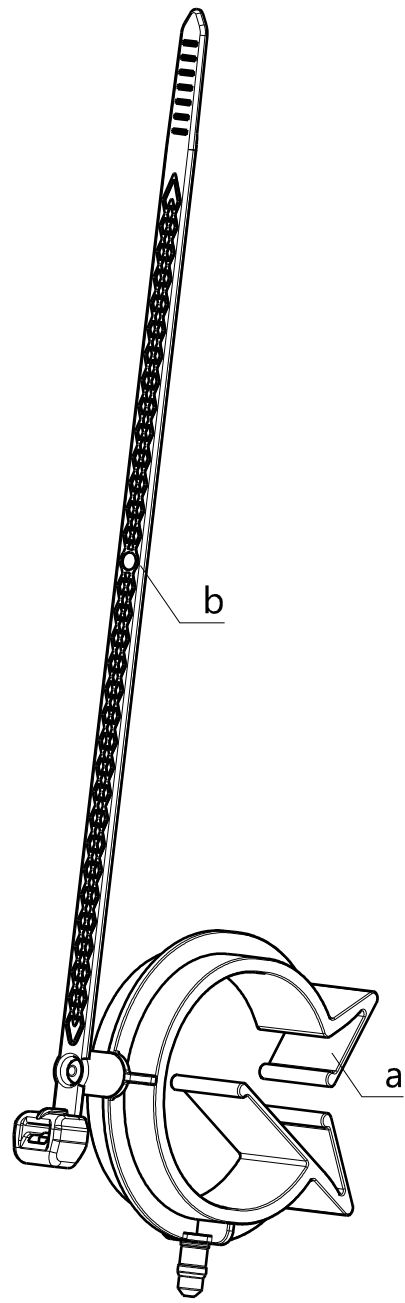

- Specification:

 - Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH
 - Material: a: PA6.6 impact resistant heatstabilized b: PA6.6 impact resistant heatstabilized
 - Material color: a: black b: black
- Spezifikation:

 - Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH
 - Material: a: PA6.6 schlagzaeh hitzestabilisiert b: PA6.6 schlagzaeh hitzestabilisiert
 - Material Farbe: a: schwarz b: schwarz

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Printed copy for information only/
Ausdruck nur zur Information

Line/ Zeile	Product type/ Artikelbezeichnung	Project no./ Projektnr.	Length/ Laenge L	Strap width/ Bandbreite B	Thickness/ Dicke S	Bundle/ Buendel Ø	Tensile force/ Schlaufenhaltekrft N min.	Project no./ Projektnr.		
1	T50SOSASVCOC25-31ST	GPN 20-0645	155 ± 5	4.6 ± 0.2	1.3 ± 0.2	2-35	200	X	X	

Revision Level			Revision Record			 		The copyright of this drawing is reserved by HellermannTyton.		Drawn		Date (YYYY/MM/DD)		Title		Scale 1:1	
Drawing	State	Part			A.Hiller			2020/03/26									
00.2	Design Release	00			Approved			Date (YYYY/MM/DD)		U. Villbrandt		2020/03/26		Global Project Number see table			
Changed	Date (YYYY/MM/DD)			All drawing revisions are stored in CAD PDM database				Units mm		 www.HellermannTyton.com		Drawing-No		Format A2			
-	-					20-0645-001-CSG		Sheet 1 / 1									
Approved	Date (YYYY/MM/DD)																
-	-																