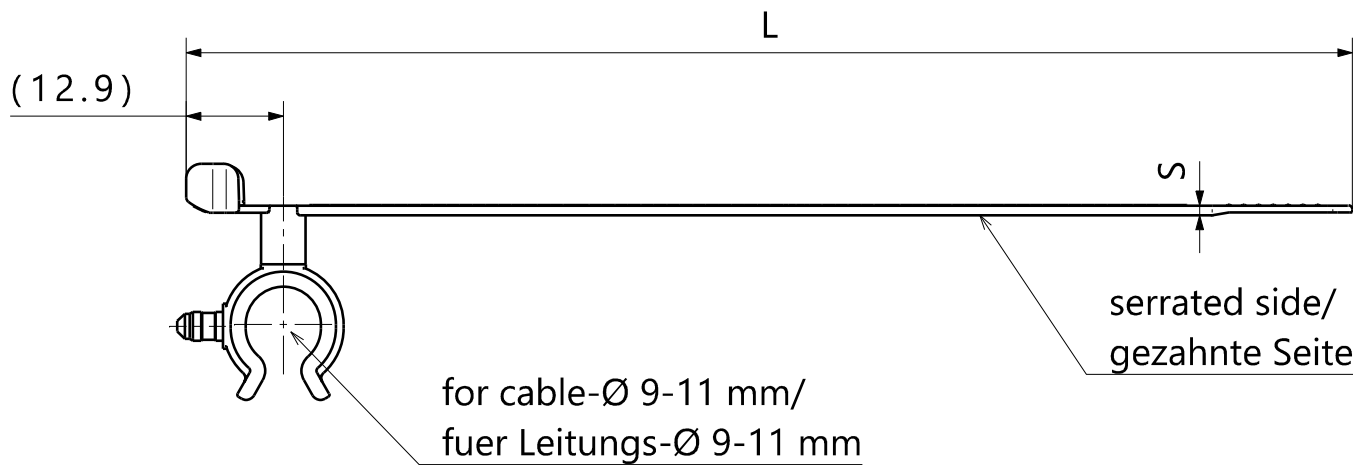
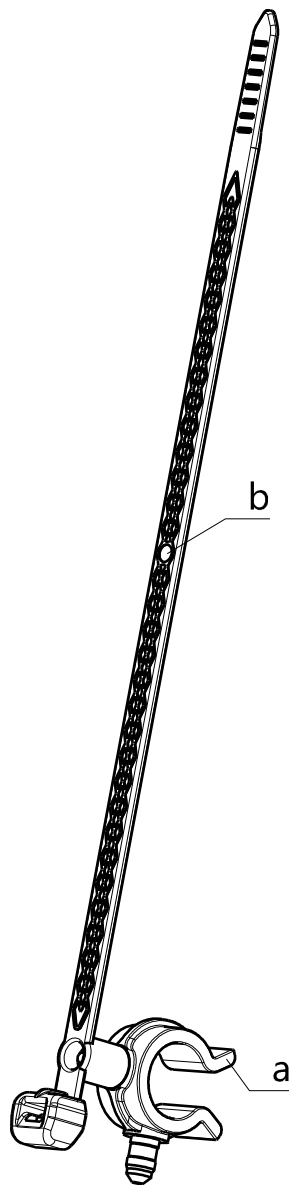


- Specification:

 - Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH
 - Material: a: PA6.6 impact resistant heatstabilized b: PA6.6 impact resistant heatstabilized
 - Material color: a: black b: black
- Spezifikation:

 - Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH
 - Material: a: PA6.6 schlagzaeh hitzestabilisiert b: PA6.6 schlagzaeh hitzestabilisiert
 - Material Farbe: a: schwarz b: schwarz

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Printed copy for information only/ Ausdruck nur zur Information								Project no./ Projektnr.		GPN 13-1085		GPN 17-2290	
								Semi-finished part/ Halbfabrikat		OC9-11		T50SOS-AS-VC	
										a		b	
Line/ Zeile	Product type/ Artikelbezeichnung	Project no./ Projektnr.	Length/ Laenge L	Strap width/ Bandbreite B	Thickness/ Dicke S	Bundle/ Buendel Ø	Tensile force/ Schlaufenhaltekraft N min.						
1	T50SOSASVCOC9-11B	GPN 20-0646	155 ±5	4.6 ±0.2	1.3 ±0.2	2-35	200	X	X				

Revision Level		
Drawing	State	Part
00.2	Design Release	00
Changed	Date (YYYY/MM/DD)	
-	-	
Approved	Date (YYYY/MM/DD)	
-	-	

Revision Record	

The copyright of this drawing is reserved by HellermannTyton.

Units

mm

Drawn	Date (YYYY/MM/DD)
A.Hiller	2020/08/04
Approved	Date (YYYY/MM/DD)
B.Schiwek	2020/08/04

Helle**mann****Ty****ton**

www.HellermannTyton.com

Title		Scale
...ASVCOC9-11B		1:1
Drawing-No		Global Project Number
20-0646-001-CSG		see table
		Format
		A2
		Sheet
		1 / 1