




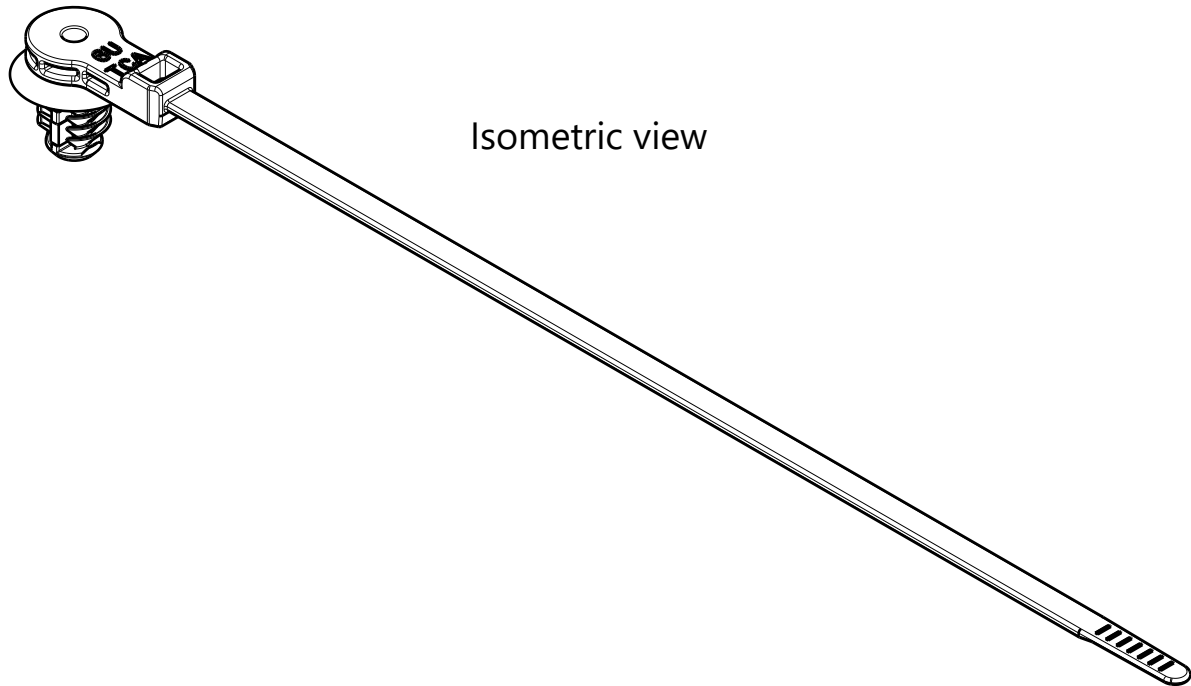

Isometric view

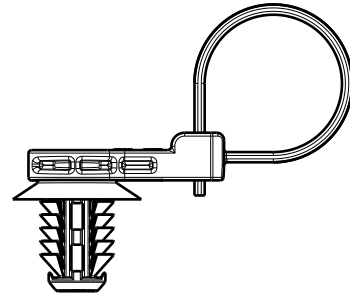


Assembly view
Scale 1:1

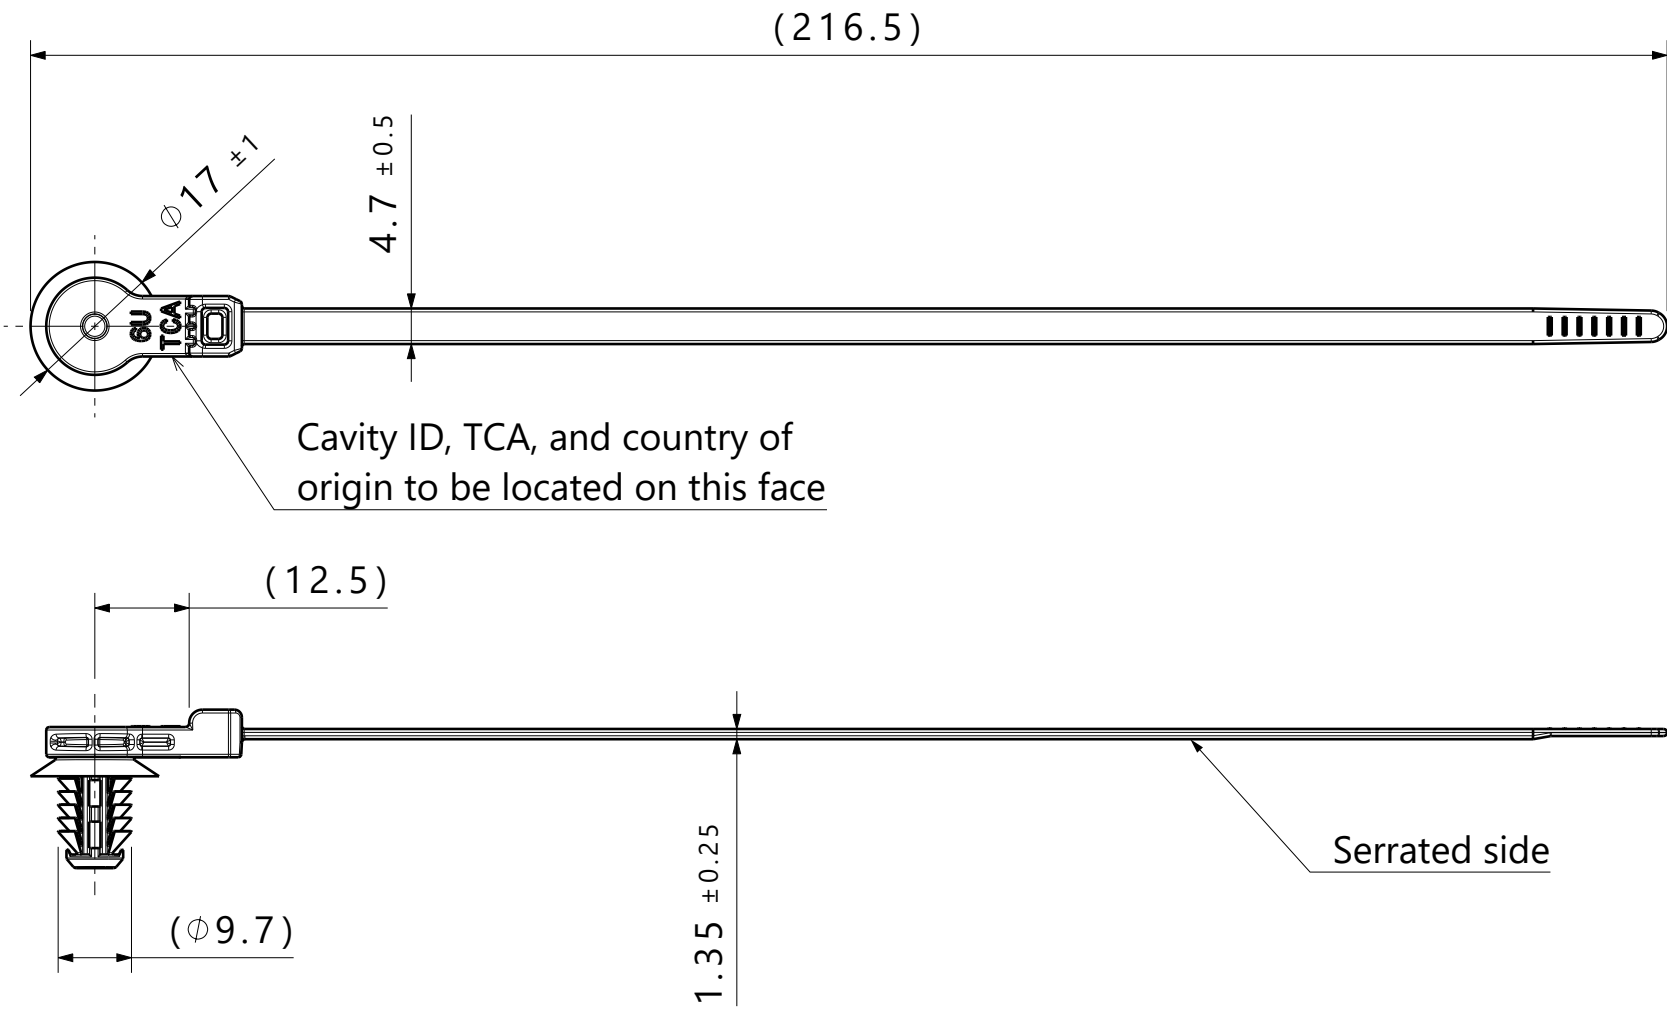

Cavity ID, TCA, and country of origin to be located on this face

Serrated side



- Reference:
- Performance requirements at dry as molded:
1. Fir tree push in force: 45 newtons (10 lbf) max in the applicable nominal hole size and a plate thickness of 1.8mm.
 2. Fir tree pull out force: 110 newtons (25 lbf) min in the applicable nominal hole size and a plate thickness of 1.8mm.
 3. Cable tie min loop tensile strength: 225 newtons (50 lbf)

- Notes:
1. Material: See chart
 2. Material color: See chart
 3. Maximum percent regrind permissible: 25%
 4. Max allowable flash to be: 0.25mm
 5. Max allowable mismatch to be: 0.1mm
 6. Sheet metal thickness range: 0.60mm - 6.00mm
 7. Applicable hole size:
 - A. 8.0mm +/- 0.4
 - B. M10 x 1.5
 8. Bundle range: 2.0mm to 50.0mm

Global Part Description	Material	Color
T50ROSM10SO12.5A-PA66HIRHSUV-BK	PA66HIRHSUV	Black

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.	Drawn		Date (YYYY/MM/DD)	Title T50ROS with 12.5mm Offset and 8mm Round Fir Tree (A Series)			Scale	1:1
Drawing	State	Part	ECN 016038				Camposagrado	2020/07/24	Global Project Number				20-0805	
00.2	Design Release	-	All drawing revisions are stored in CAD PDM database		Approved		Date (YYYY/MM/DD)	Drawing-No 20-0805-001-CSU	Format	A3				
Changed		Date (YYYY/MM/DD)			Fish		2020/04/13		Sheet	1 / 1				
Camposagrado		2020/09/22			Units mm HellermannTyton www.HellermannTyton.com									
Approved		Date (YYYY/MM/DD)												
Fish		2020/09/22												

HellermannTyton
www.HellermannTyton.com