

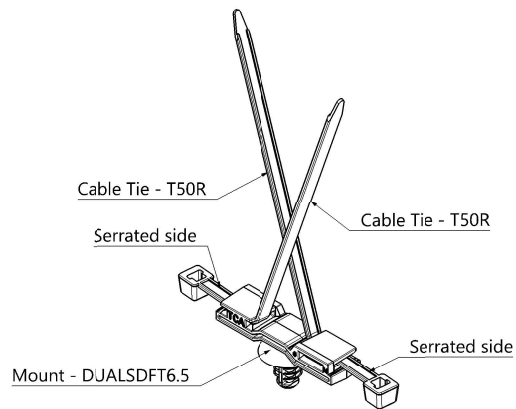
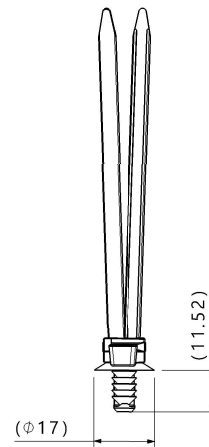


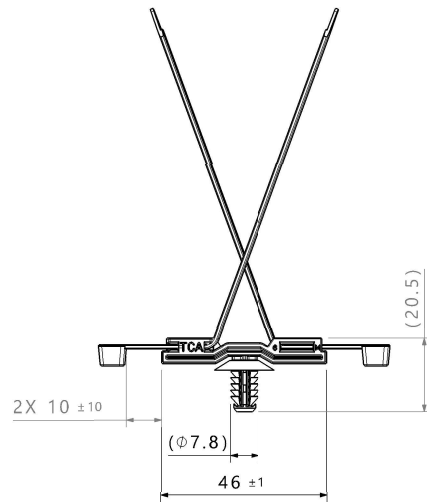

Isometric view
Delivery condition: Assembled set



- Reference:
1. Tested at the component level
 2. Tested at dry as molded

- Performance requirements:
1. Fir tree push in force: 45 newtons (10 lbf) max in each applicable nominal oval hole size and a plate thickness of 1.8mm.
 2. Fir tree pull out force: 110 newtons (25 lbf) min in each applicable nominal oval hole size and a plate thickness of 1.8mm.
 3. Min loop tensile cable tie strength: 225newtons (50lbs)

- Notes:
1. Sheet metal thickness range: 0.60mm - 6.00mm
 2. Applicable hole size:
A. 6.5mm +0.5/- 0.4
B. 6.35mm +/-0.25 Hex

Revision Level						Revision Record			Global Part Description			Bundle Range		Cable ties				Mount																	
T50RX2DUALSDF6.5A-PA66HIRHSUV-BK						4mm to 50mm			2		CT2050007CST		PA66HIRHSUV		Black		20-0816-001-CSU		PA66HIRHSUV		Black														
Drawing			State			Part			016349						The copyright of this drawing is reserved by HellemannTyton.			Drawn			Date (YYYY/MM/DD)			Title			Scale			1:1					
00.3			Design Release															Rutledge			2021/02/03			2 T50R cable ties assembled with DUALSDF6.5 mount			Global Project Number			20-0816					
Changed			Date (YYYY/MM/DD)															Approved			Date (YYYY/MM/DD)														
2021/02/22																		Haftarski			2021/02/22														
Approved			Date (YYYY/MM/DD)																					Drawing-No			20-0816-101-CSU			Format			A2		
Haftarski			2021/03/17																								Sheet			1 / 1					
6						5			4			3		2		1																			
												www.HellemannTyton.com																							