

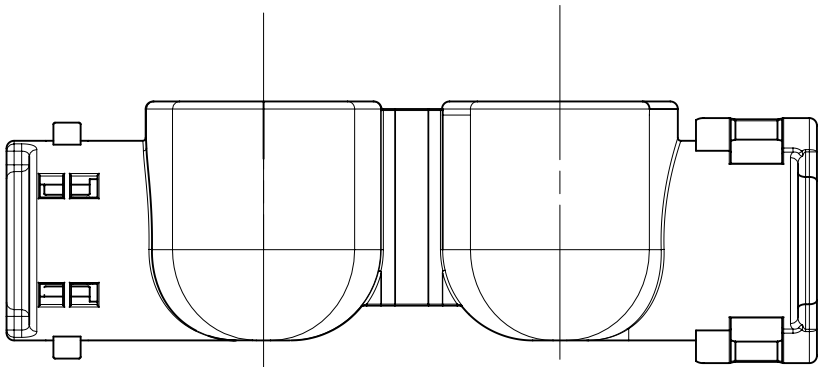
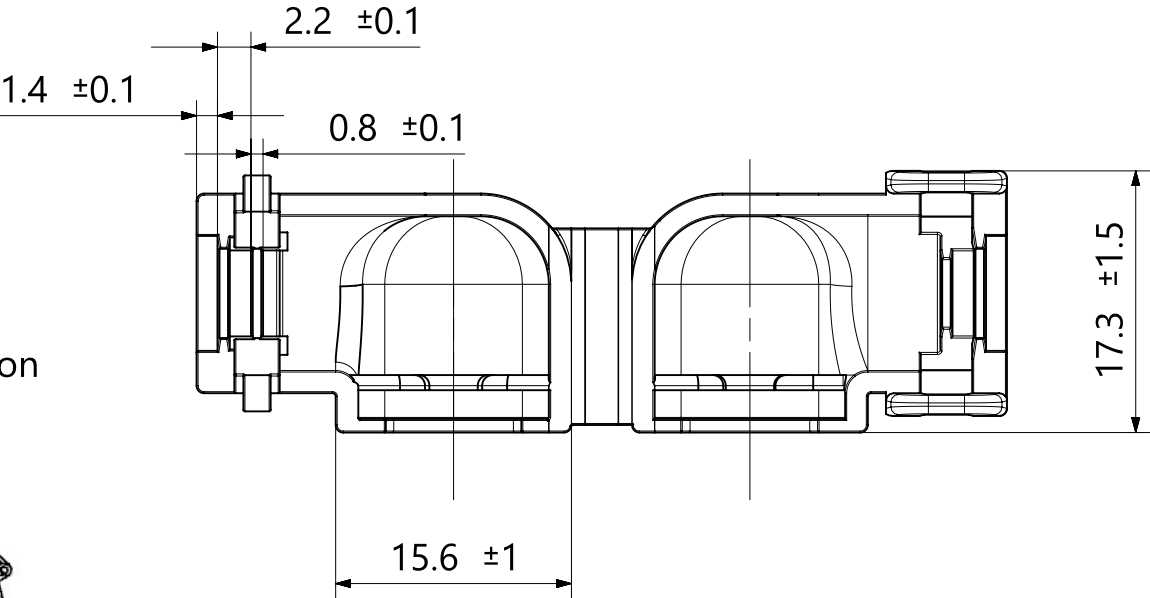
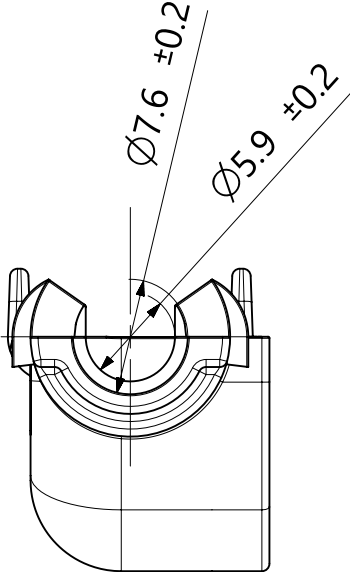


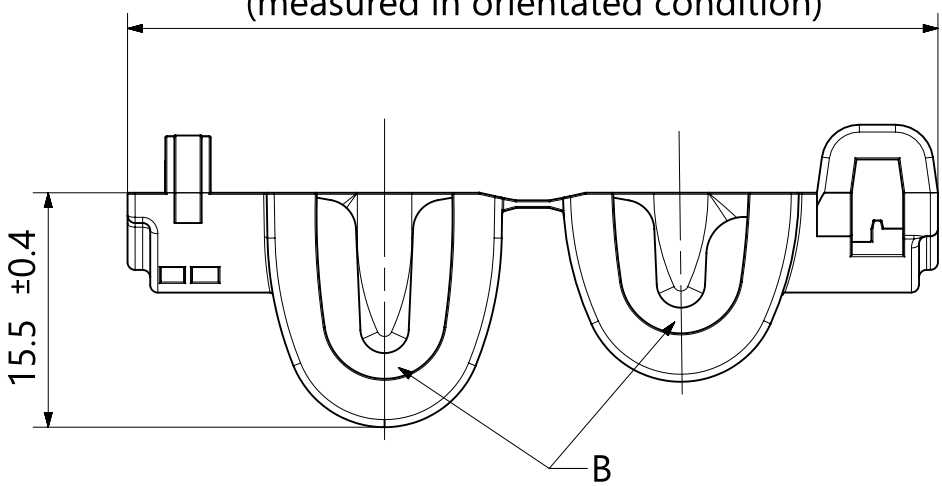





53.6 ±1.5

(measured in orientated condition)

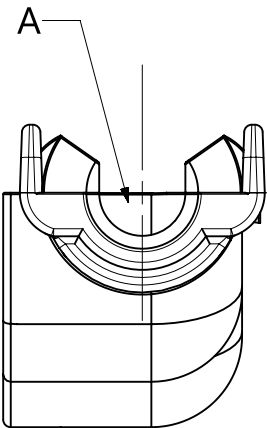

delivery condition

closed condition

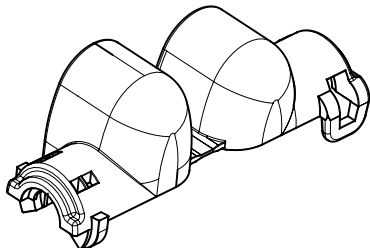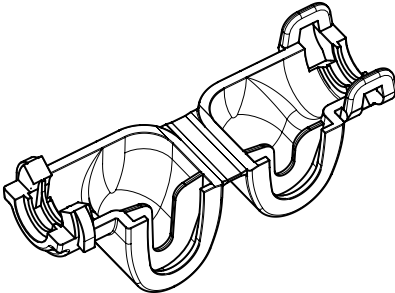

The manufacturing-related geometry changes (injection point, ejector marks, etc.) allowed. Design of the details are left to suppliers discretion.

Specification:

- Material: PA66 heat stabilized impact modified
- Color: black

Application:

- A: corrugated tube NW4.5
- B: connector RB4KPT

Durch das Herstellverfahren bedingte Geometrieänderungen (Anspritzung, Auswerfermarkierung, etc.) zulaessig. Einzelheiten bleiben dem Hersteller ueberlassen.

Spezifikation:


- Material: PA66 hitzestabil schlagzaeh
- Farbe: schwarz

Applikation:

- A: Wellschlauch NW4.5
- B: Stecker RB4KPT

Revision Level		
Drawing	State	Part
00.0	Released	0
Changed	Date (YYYY/MM/DD)	
Approved	Date (YYYY/MM/DD)	

Revision Record	



The copyright of this drawing is reserved by HellermannTyton.

Units
mm

HellermannTyton

www.HellermannTyton.com

Drawn	Date (YYYY/MM/DD)
Koch	2020/09/16
Approved	Date (YYYY/MM/DD)
Schiwek	2020/09/16

Title	BS-RB4KPT-90NW4.5	Scale	2:1; 1:1
		Global Project Number 20-1302	
Drawing-No	20-1302-001-CSG	Format	A3
		Sheet	1 / 1