


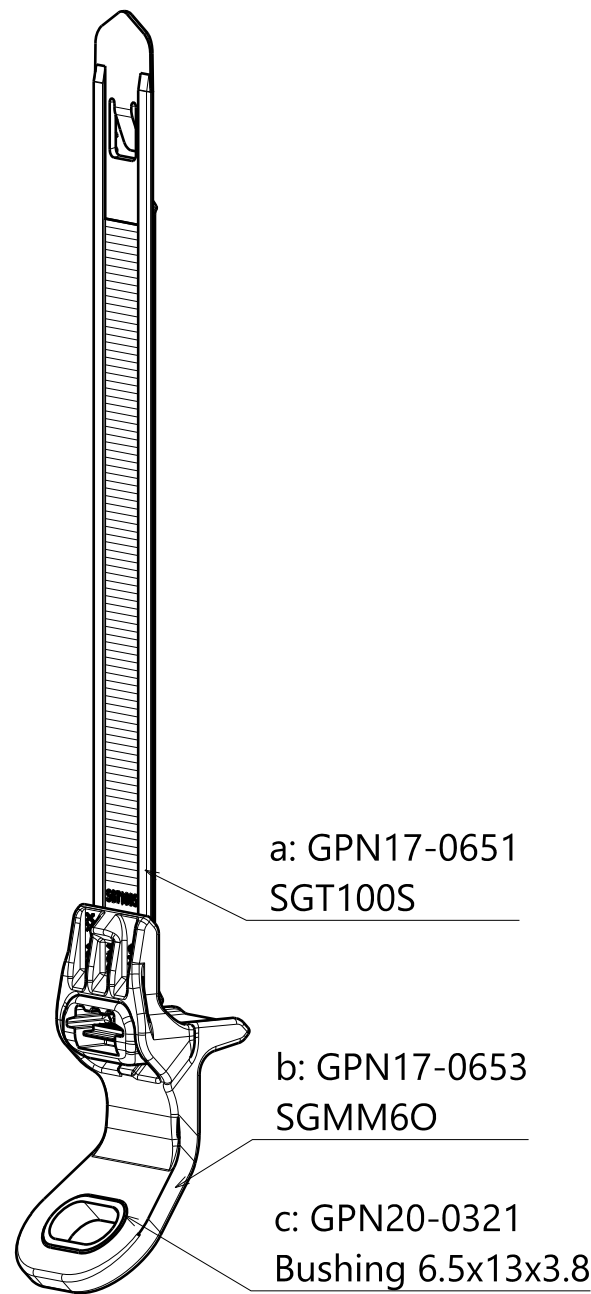
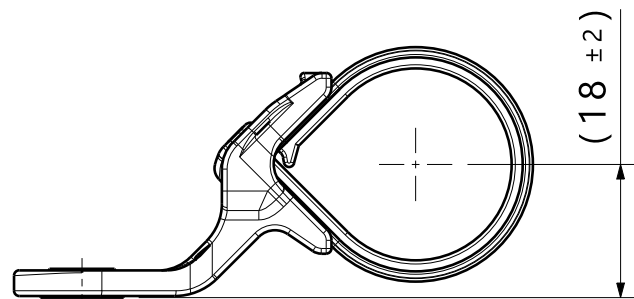


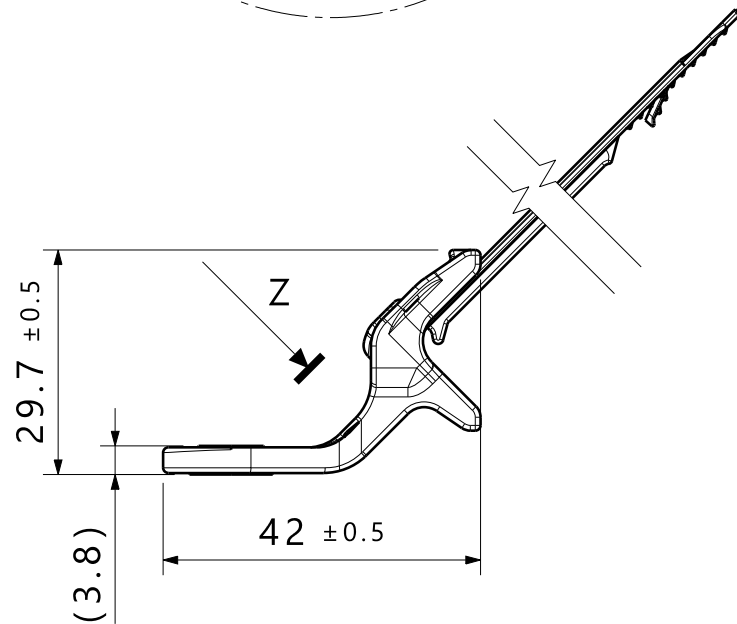


Delivery condition/
Auslieferungszustand
1:1

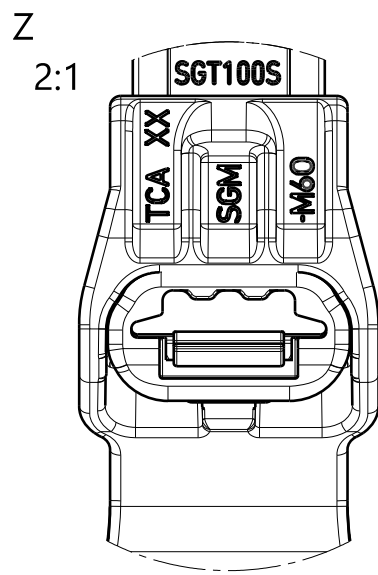

Assembly example for reference only/
Montagebeispiel dient nur als Referenz
1:1

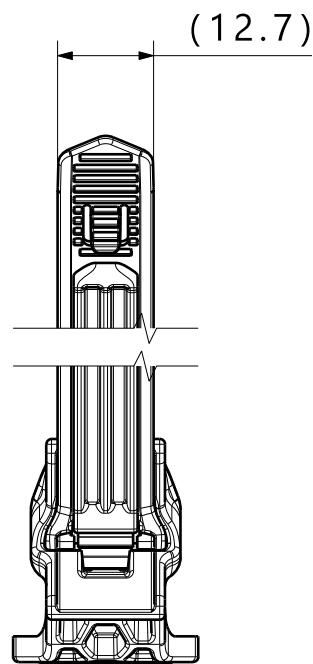

Bushing / Buchse
suited for / passend fuer M6

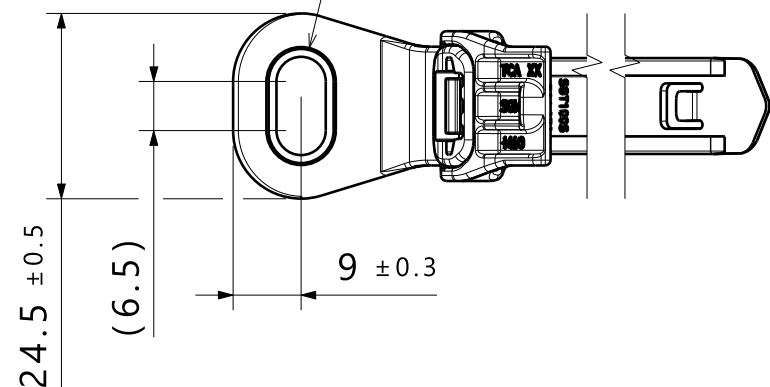

Printed copy for information only/
Ausdruck nur zur Information

Specification:

- Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH

Spezifikation:

- Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH

Material/ Material a	Max. recommended tension setting/ max. empfohlene Abbindekraft N
PA66HS+TPE	200±20
PA66HIRHSUV+TPE	169±20

- Bundle Ø: 5.0 - 25.4mm

- Buendel Ø: 5.0 - 25.4mm

- Material:
a: PA66 + TPE
b: PA6GF30
heatstabilised
c: Steel,
case hardened,
Zn-Ni coated

- Material:
a: PA66 + TPE
b: PA6GF30
hitze stabilisiert
c: Stahl,
einsatzgehärtet,
Zn-Ni beschichtet

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Durch das Herstellverfahren bedingte Geometrieänderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Revision Level		
Drawing	State	Part
00.7	Design Release	
Changed	Date (YYYY/MM/DD)	
Approved	Date (YYYY/MM/DD)	

Revision Record	

All drawing revisions are stored in CAD PDM database

The copyright of this drawing is reserved by HellermannTyton.
Units mm

Drawn	Date (YYYY/MM/DD)
Matz	2022/01/06
Approved	Date (YYYY/MM/DD)
Schiwek	2022/01/06
HellermannTyton	
www.HellermannTyton.com	

Title		Scale	1:1
SGT100SM6O		Global Project Number	20-1310
Drawing-No		Format	A3
20-1310-001-CSG		Sheet	1 / 1