
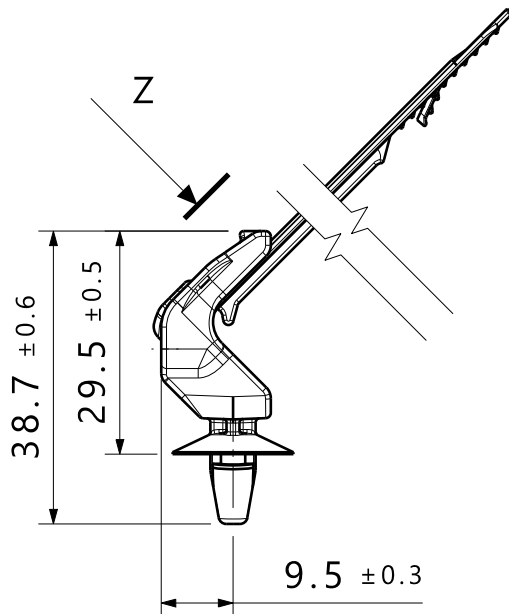
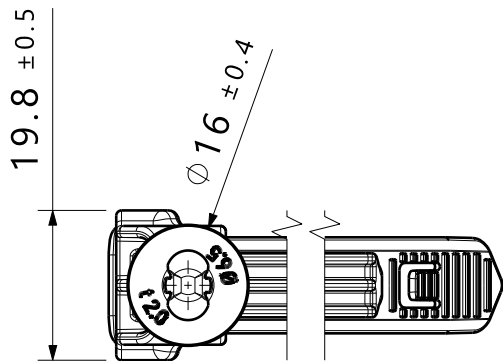
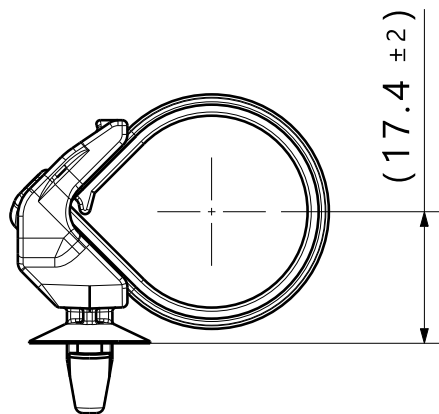
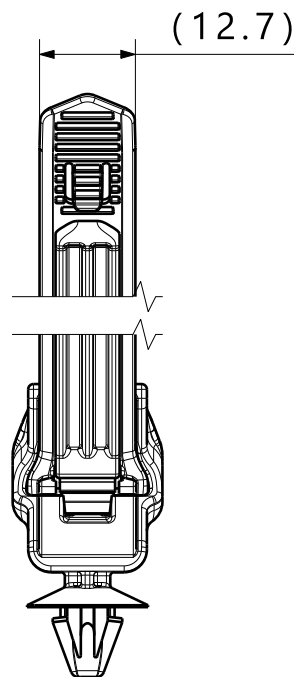
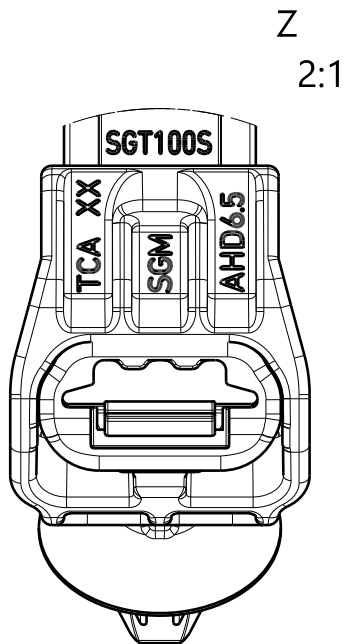


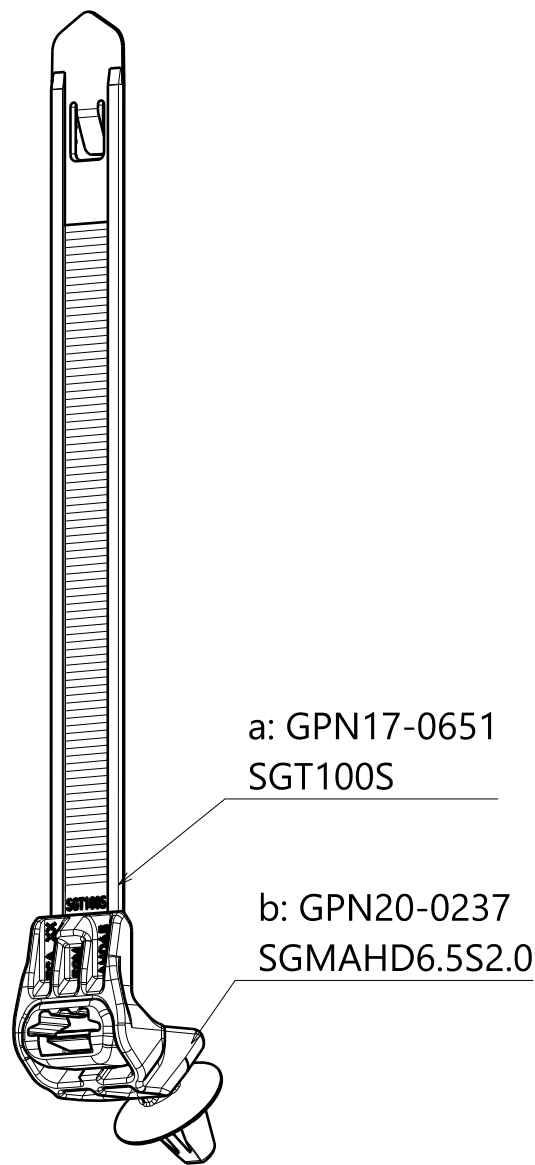

Specification:

- Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH

Spezifikation:

- Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH

Material/ Material a	Max. recommended tension setting/ max. empfohlene Abbindekraft N
PA66HS+TPE	200±20
PA66HIRHSUV+TPE	169±20

- Bundle Ø: 5.0 - 25.4mm
- Hole size: Ø6.5±0.2mm
- Panel thickness: 1.7 - 2.3mm

- Buendel Ø: 5.0 - 25.4mm
- Loch Ø: Ø6.5±0.2mm
- Blechdicke: 1.7 - 2.3mm

- Material: a: PA66 + TPE
b: PA66
heatstabilised

- Material: a: PA66 + TPE
b: PA66
hitzestabilisiert

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Assembly example for reference only/
Montagebeispiel dient nur als Referenz
1:1

Printed copy for information only/
Ausdruck nur zur Information

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.	Drawn	Date (YYYY/MM/DD)	Title SGT100SAHD6.5S2.0			Scale	1:1
Drawing	State	Part					Matz	2022/01/06				Global Project Number	20-1311
00.4	Design Release			All drawing revisions are stored in CAD PDM database	Units mm	HellermannTyton www.HellermannTyton.com	Approved	Date (YYYY/MM/DD)	Drawing-No 20-1311-001-CSG			Format	A3
Changed	Date (YYYY/MM/DD)						Schiwek	2022/01/06				Sheet	1 / 1
							Approved	Date (YYYY/MM/DD)					