
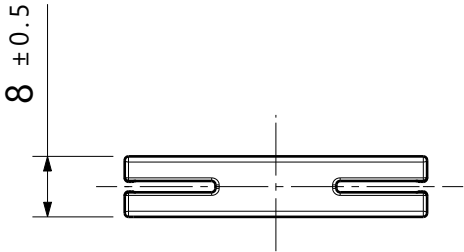


ISO
1:1

ISO
1:1

Printed copy for information only/
Ausdruck nur zur Information

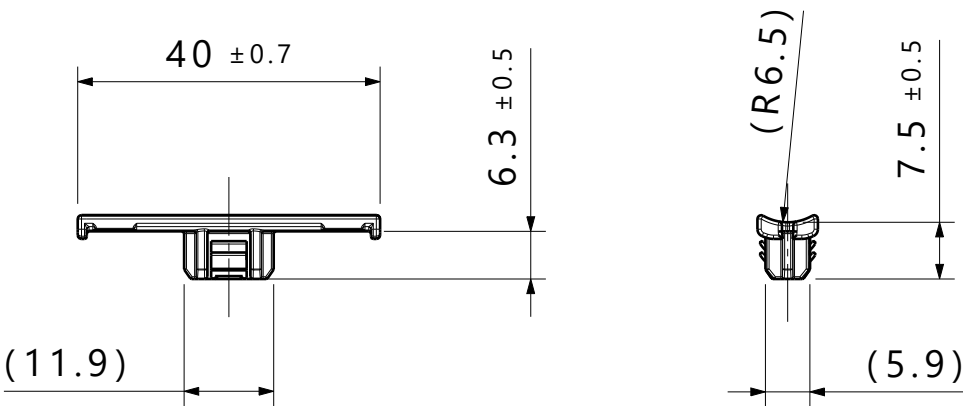

Specification:

- Material: PA6.6 heatstabilized impact modified
- Material color: black
- Elongated hole: 6,2±0,2 x 12,2±0,2 mm
- Panel thickness: 0,60 - 2,30 mm

Spezifikation:

- Material: PA6.6 hitzestabilisiert, schlagzaeh modifiziert
- Material Farbe: schwarz
- Langloch: 6,2±0,2 x 12,2±0,2 mm
- Blechdicke: 0,60 - 2,30 mm

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Revision Level			Revision Record				The copyright of this drawing is reserved by HellermannTyton.	Drawn		Date (YYYY/MM/DD)								
Drawing	State							Part	S.Maschmann		2021/08/04		Title		Scale		1:1	
00.3	Design Release							-	Approved		Date (YYYY/MM/DD)							
Changed		Date (YYYY/MM/DD)						C.Cordts		2021/08/04								
-		-																
Approved		Date (YYYY/MM/DD)																
-		-																

All drawing revisions are stored in CAD PDM database

Units

mm

HellermannTyton

www.HellermannTyton.com

Drawing-No

20-1315-001-CSG

BC40FT62x122S

Global Project Number

20-1315

Format

A3

Sheet

1 / 1