
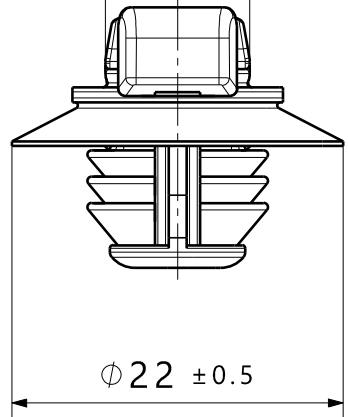
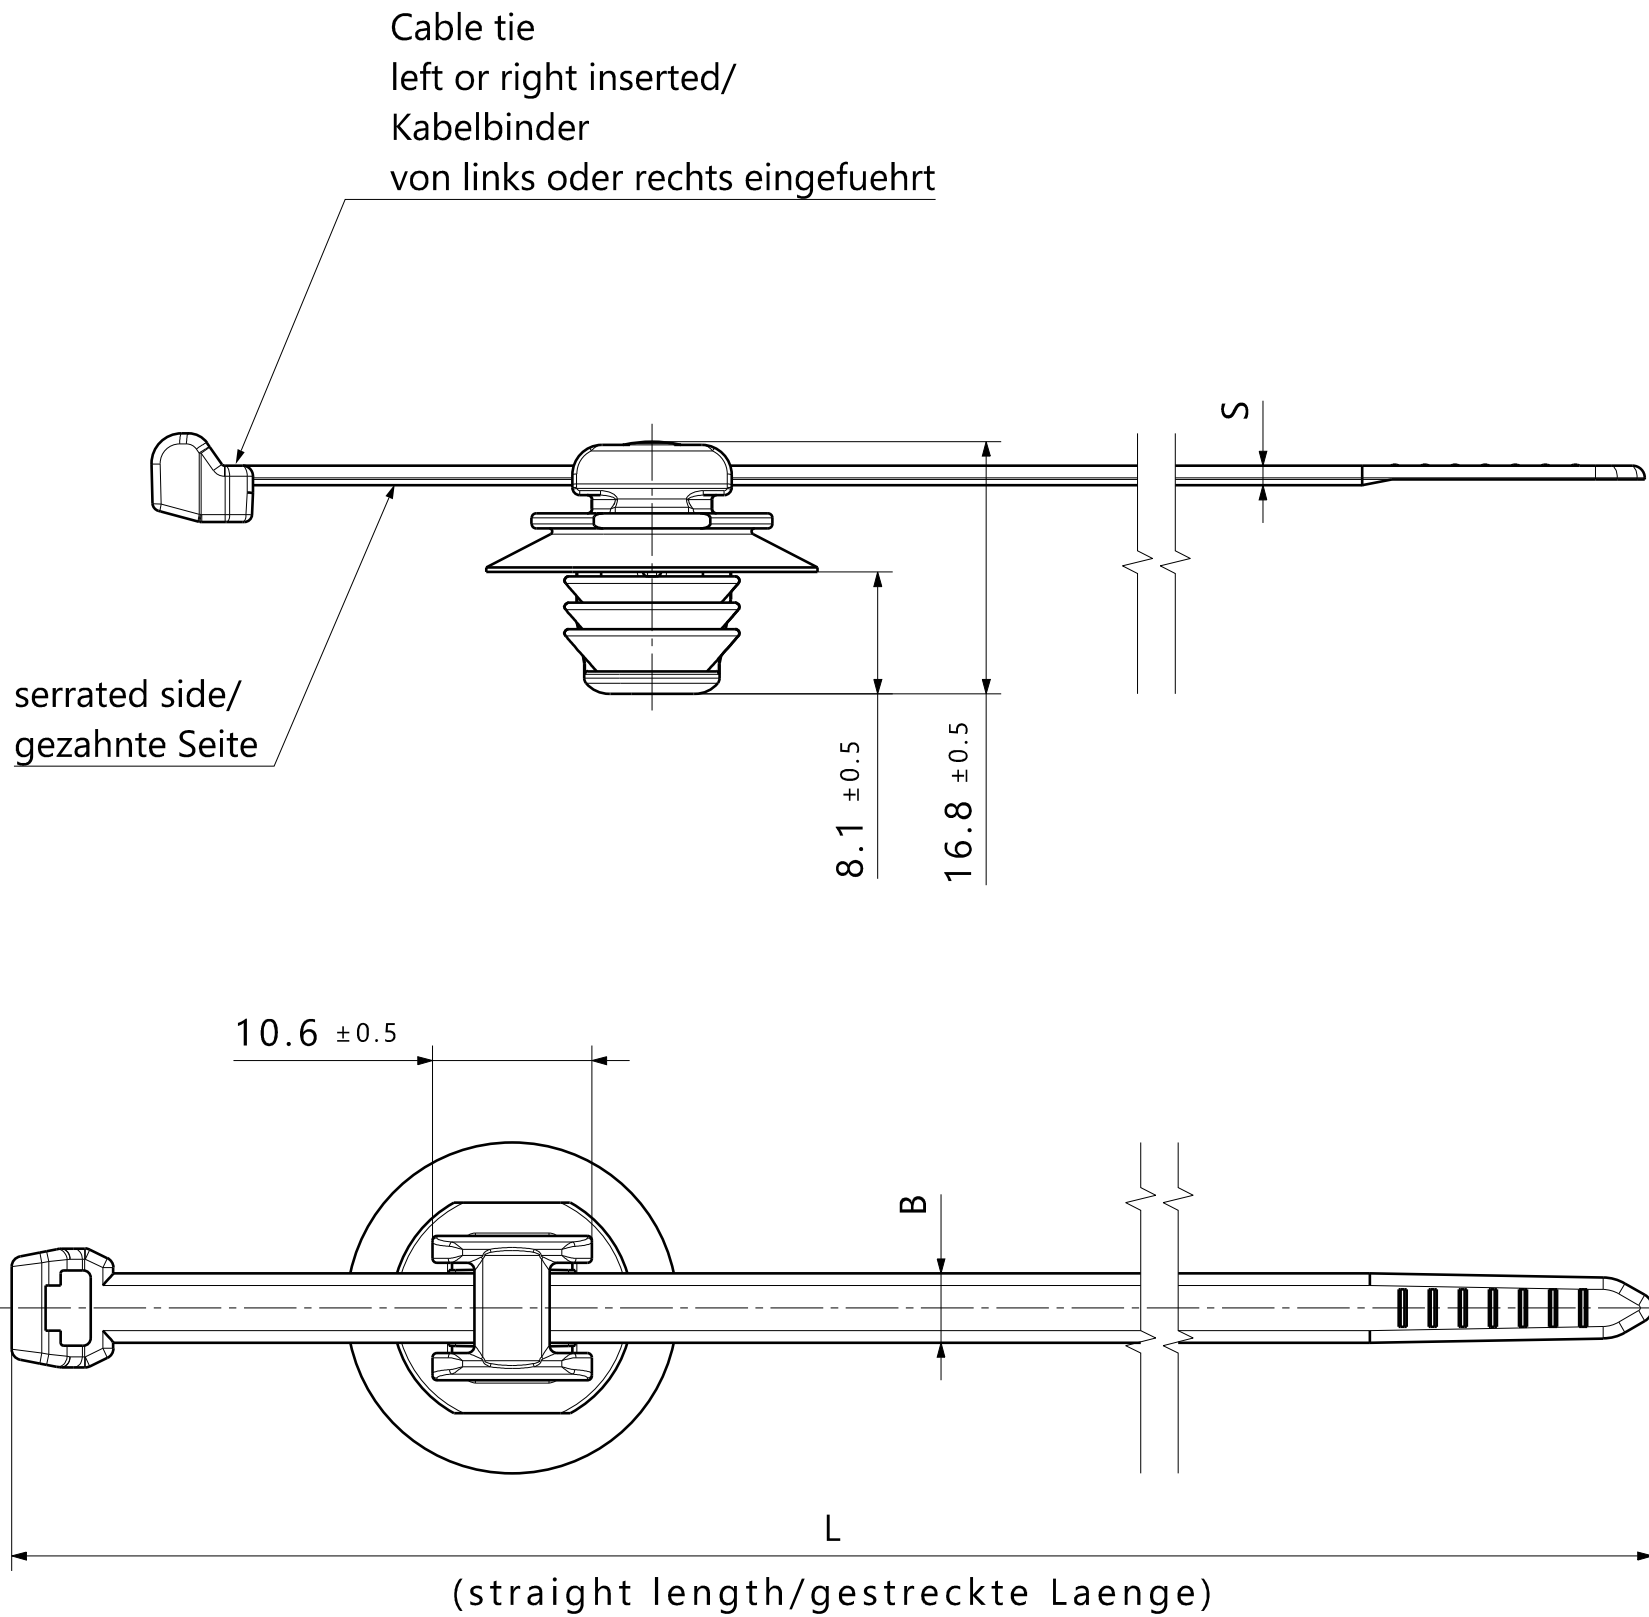


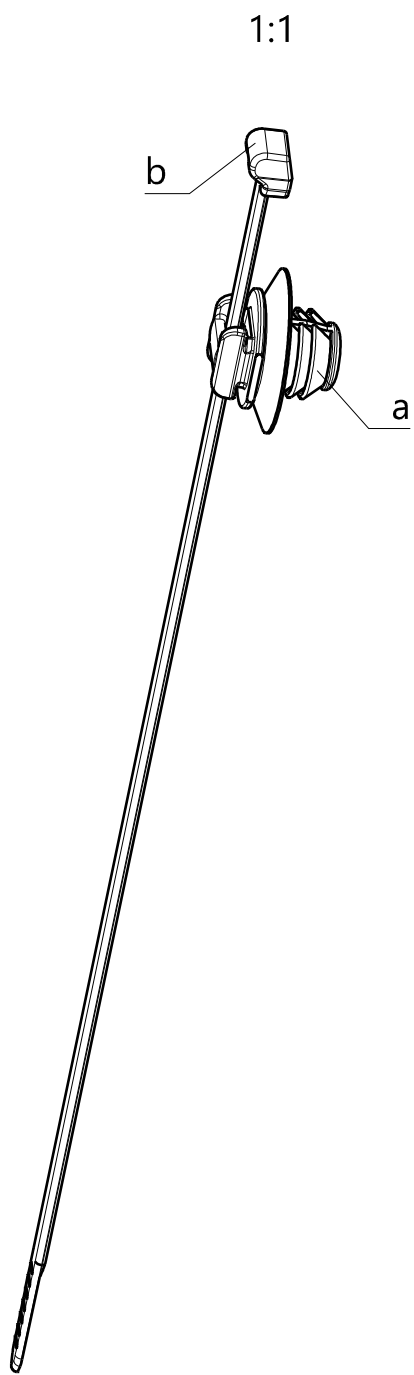

- Specification:

 - Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH
 - Material:
 - Material color:
 - Hole size:
 - Panel thickness:
- Spezifikation:

 - Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH
 - Material:
 - Material Farbe:
 - Loch Ø:
 - Blechdicke:

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Line/ Zeile	Product type/ Artikelbezeichnung	Project no./ Projektnr.	Length/ Laenge L	Strap width/ Bandbreite B	Thickness/ Dicke S	Bundle/ Buendel Ø max.	Tensile force/ Schlaufenhaltekraft N min.	Project no./ Projektnr.	
								Semi-finished part/ Halbfabrikat	20-1861 NT 602-98
1	T50ROSFTM12X1SD	20-1862	200 ± 5.0	4.6 ± 0.2	1.3 ± 0.2	50	225	a	b

Revision Level		
Drawing	State	Part
01.5	Design Release	X
Changed	Date (YYYY/MM/DD)	
R. Silva	2023/10/13	
Approved	Date (YYYY/MM/DD)	
C. Cordts	2023/10/13	

Revision Record	
Functional ranges adjusted (Thicknesses) / Funktionsbereiche angepasst (Dicken)	

The copyright of this drawing is reserved by HellermannTyton.

All drawing revisions are stored in CAD PDM database

Drawn		Date (YYYY/MM/DD)
Rafael L Silva	Approved	2021/02/09
B. Schiwiek		2021/07/09

Units
mm

HellermannTyton
www.HellermannTyton.com

Title		Scale
T50ROSFTM12X1SD		2:1
Drawing-No		Global Project Number
20-1862-001-CSG		20-1862
		Format A2
		Sheet 1 / 1

Printed copy for information only/
Ausdruck nur zur Information