


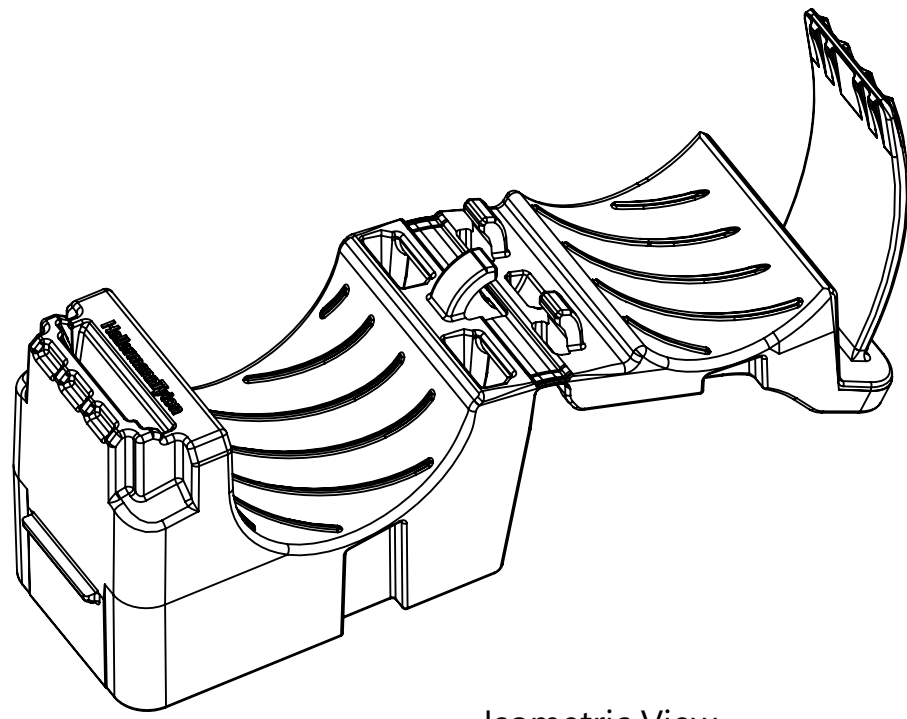
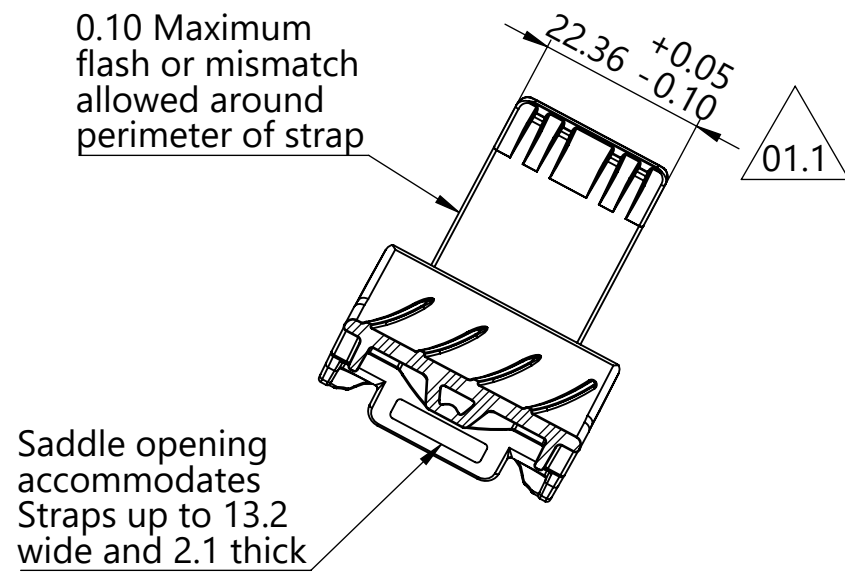
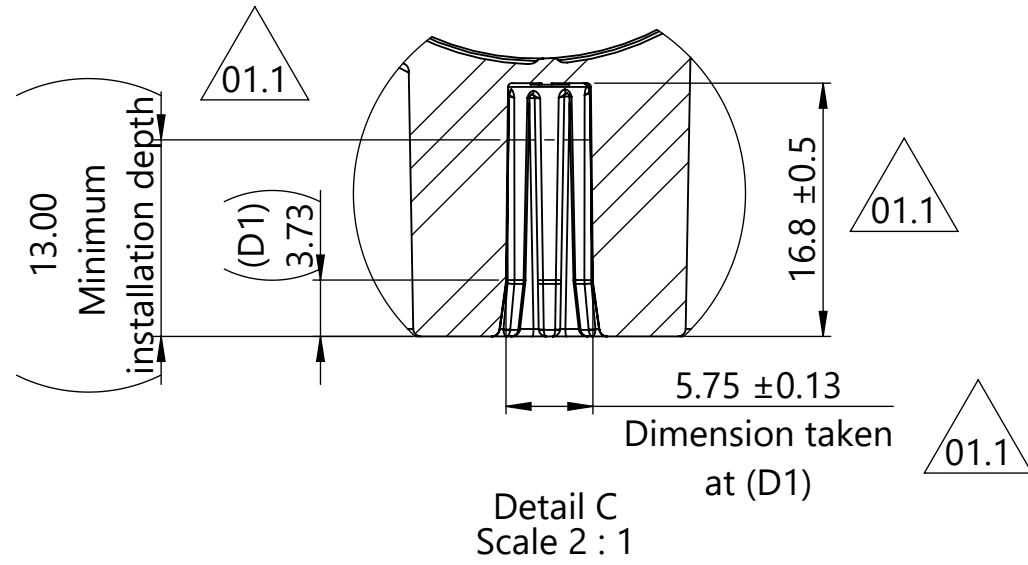
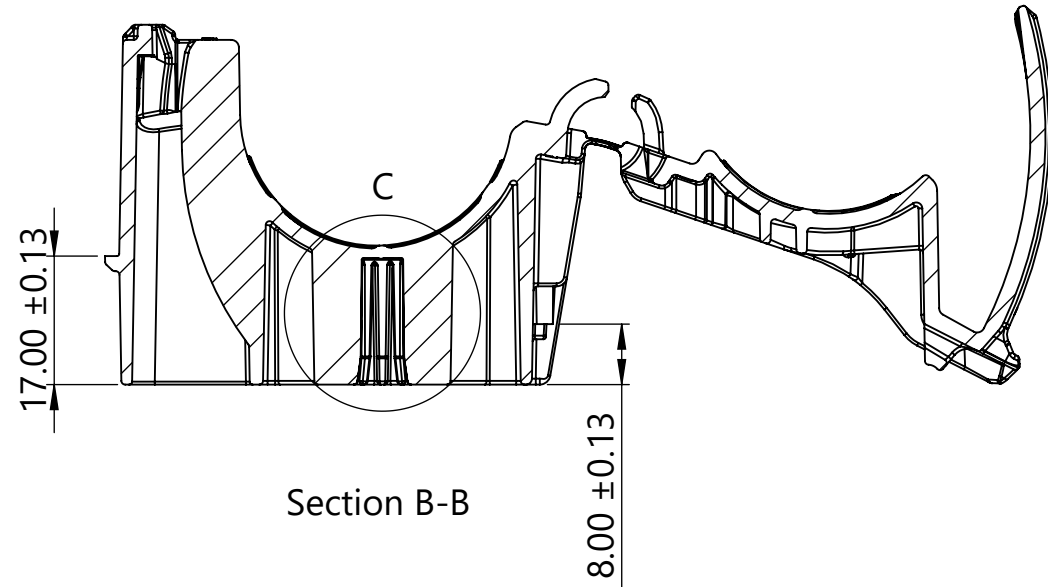
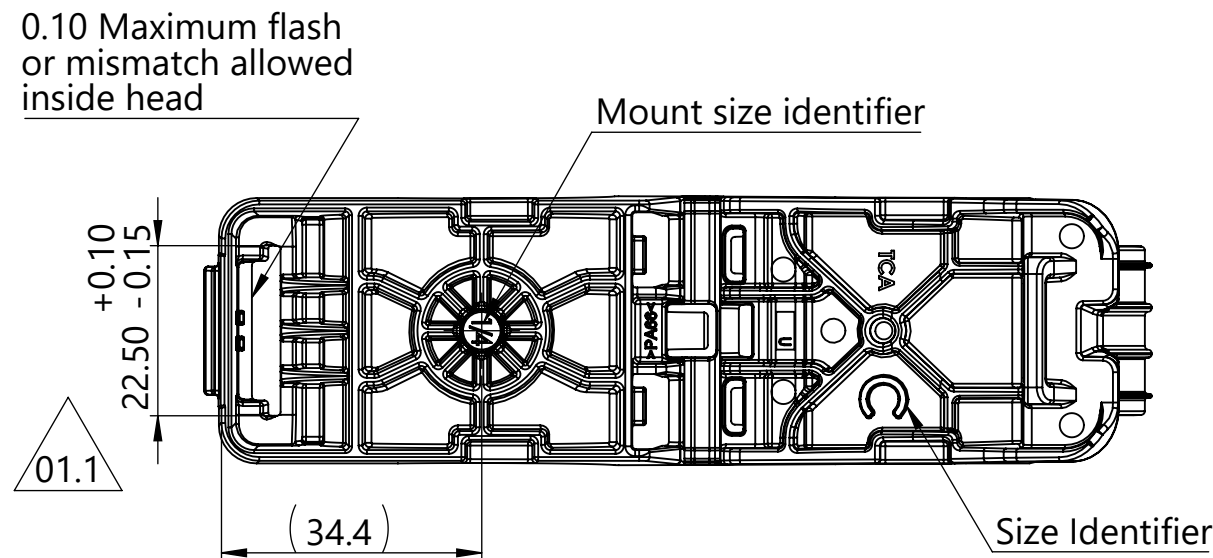


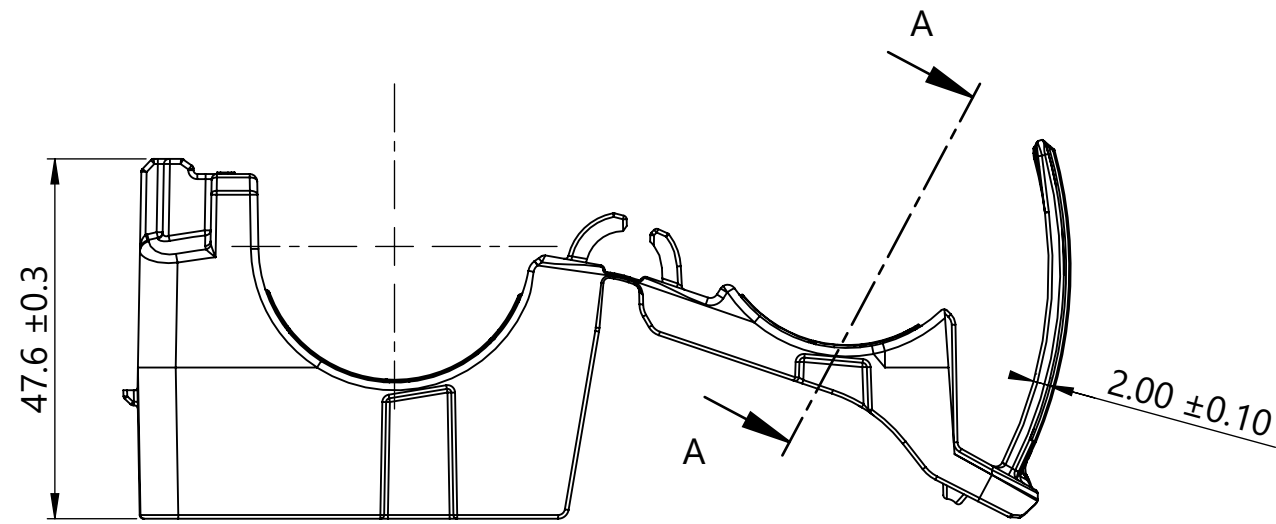


Isometric View
Product shipped in clamp open position

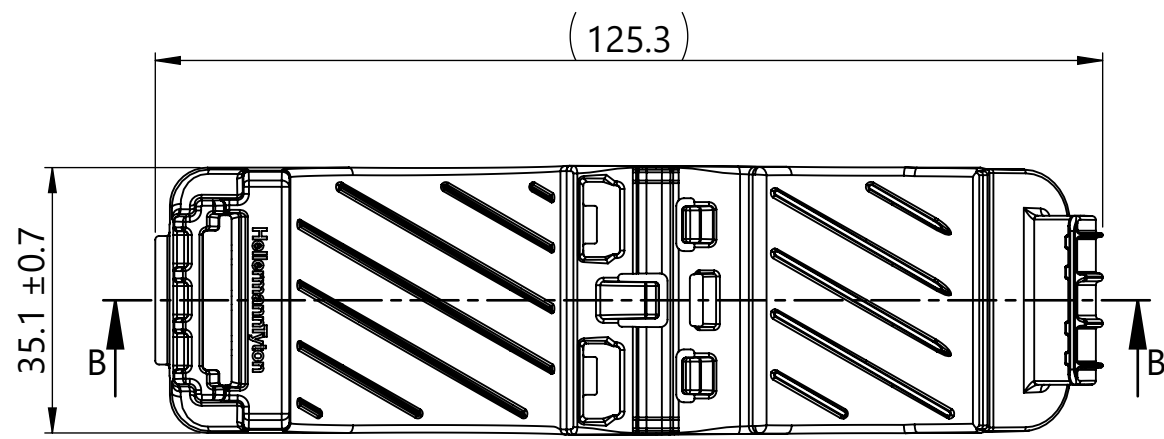

Section A-A

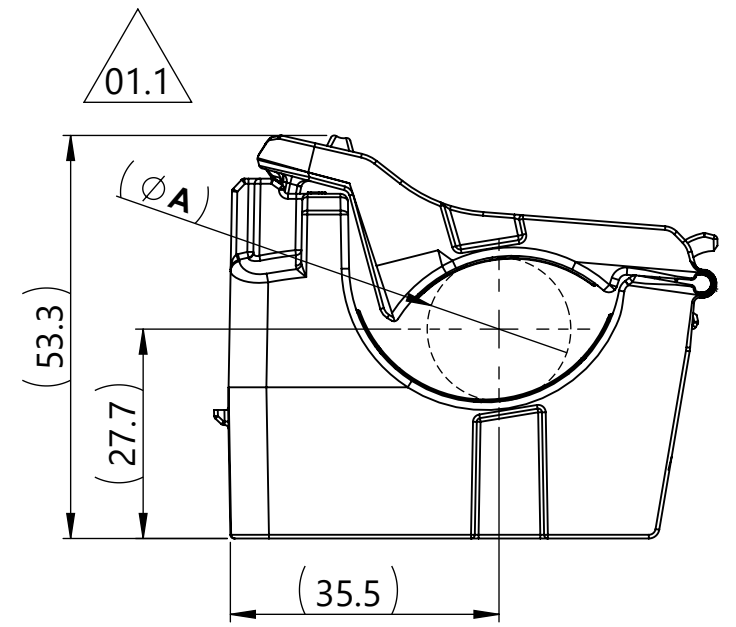

Minimum Bundle Diameter

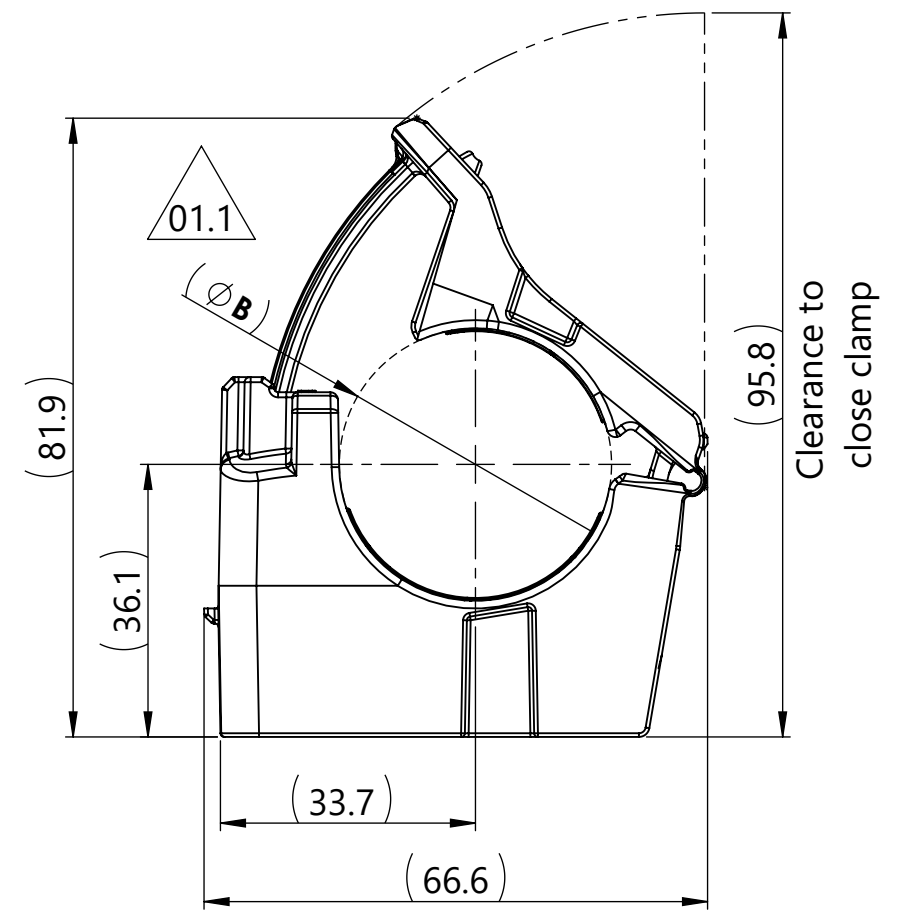

Maximum Bundle Diameter

Performance requirements:
Dry as molded with $\leq 0.5\%$ moisture content:

1. ITS-0001 Ratchet Clamp Split Mandrel Test:
1112 newtons [250 lbf] minimum at a nominal
bundle diameter of 25.40 [1.000in]

Notes:


1. Material: See chart
2. Material color: See chart
3. Maximum percent regrind permissible: 25%
4. Maximum allowable flash to be: 0.50 "Unless otherwise noted"
5. Maximum allowable mismatch to be: 0.15 "Unless otherwise noted"

Global Part Number	Global Part Description	Mounting Hole Size	Type Number	Material	Color
21-0235	CMRCCTR14-PA66HIRHSUV-BK	1/4"	CMRCCTR14	PA66HIRHSUV	Black

Bundle Types	A Minimum Diameter (Reference)	B Maximum Diameter (Reference)
Soft	19.4	36.0
Hard	18.6	35.2

CMRCCTR14	Center Mount RCC Ratchet P-Clamp, Size C, Clamp Range 18.9 to 36.0, 1/4 inch Threaded Rod	Scale 1:1 Global Project Number 21-0235
Drawing-No	21-0235-003-CSU	Format A2 Sheet 1/1

Revision level			Revision Record		
Drawing	State	Part	ECN 016968		
01.1	Design Release	-			
Changed	Date (YYYY/MM/DD)				
Spangler	2022/04/14				
Approved	Date (YYYY/MM/DD)				
Gallion	2022/04/14				



The copyright of this drawing is reserved by HellermannTyton.

HellermannTyton
www.HellermannTyton.com