

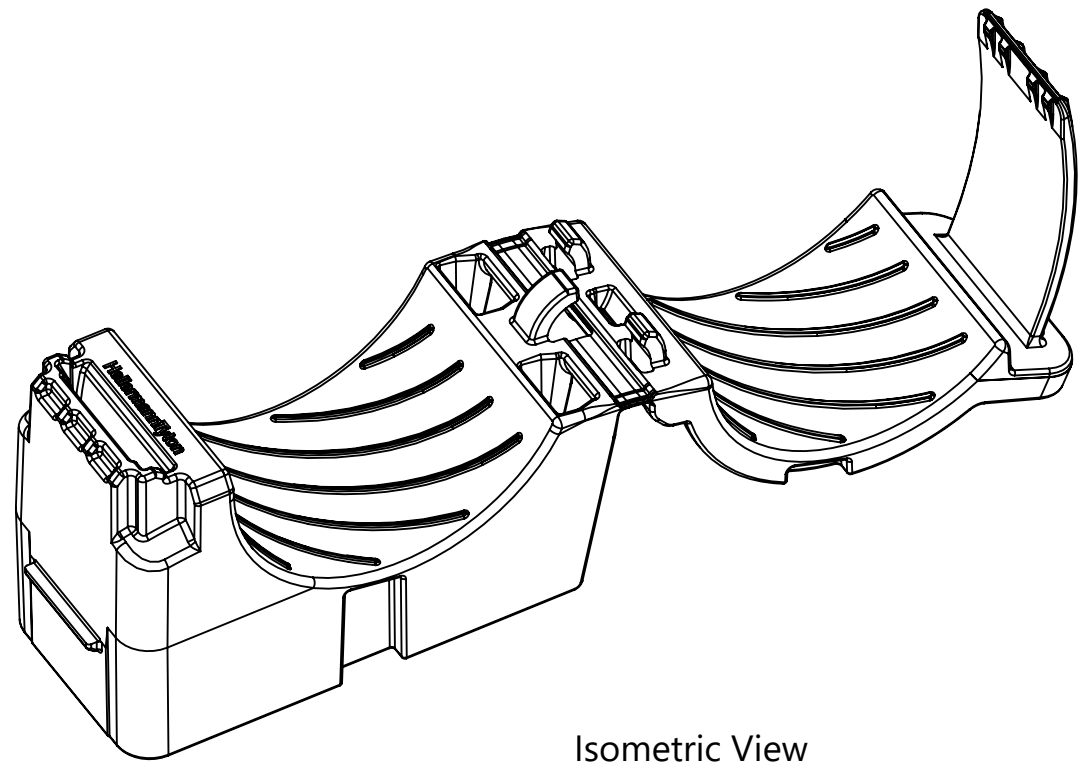


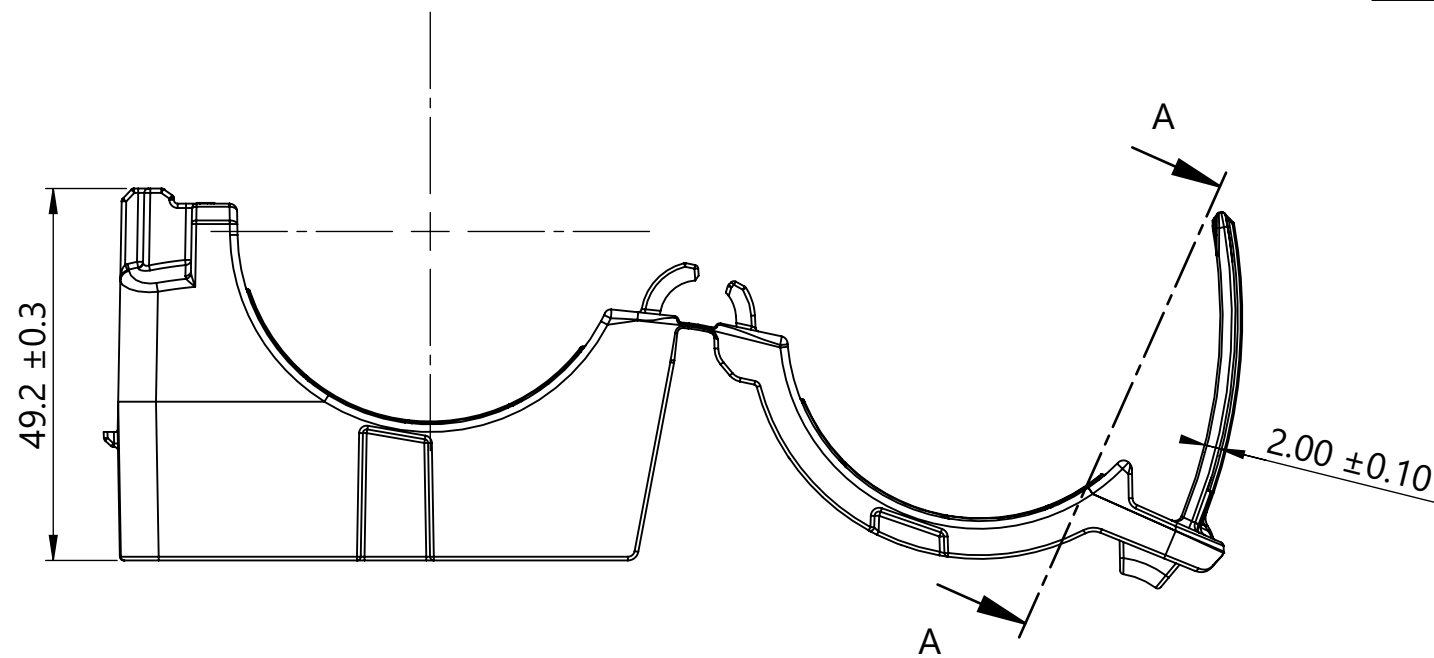



Isometric View
Product shipped in clamp open position

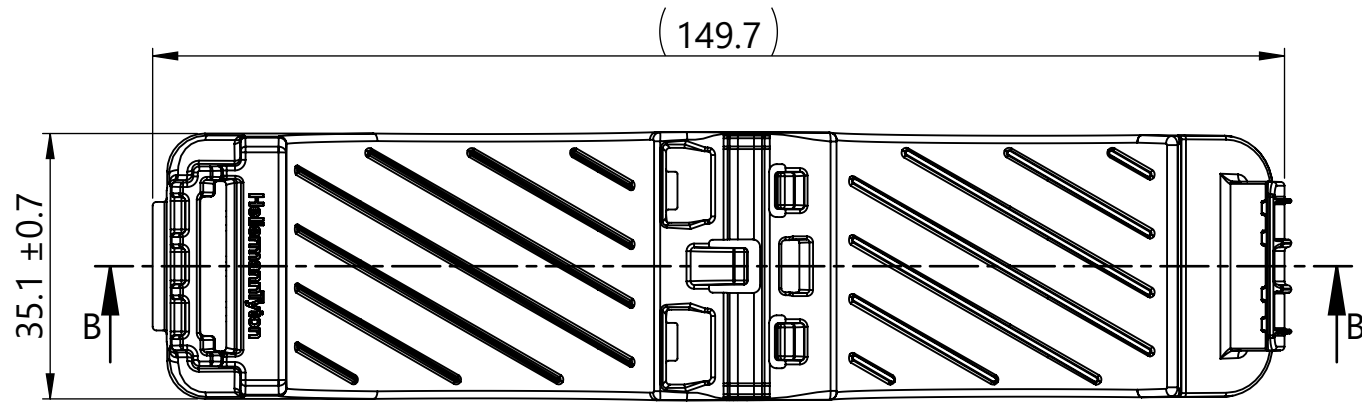


0.10 Maximum flash or mismatch allowed inside head

Mount size identifier

Size Identifier

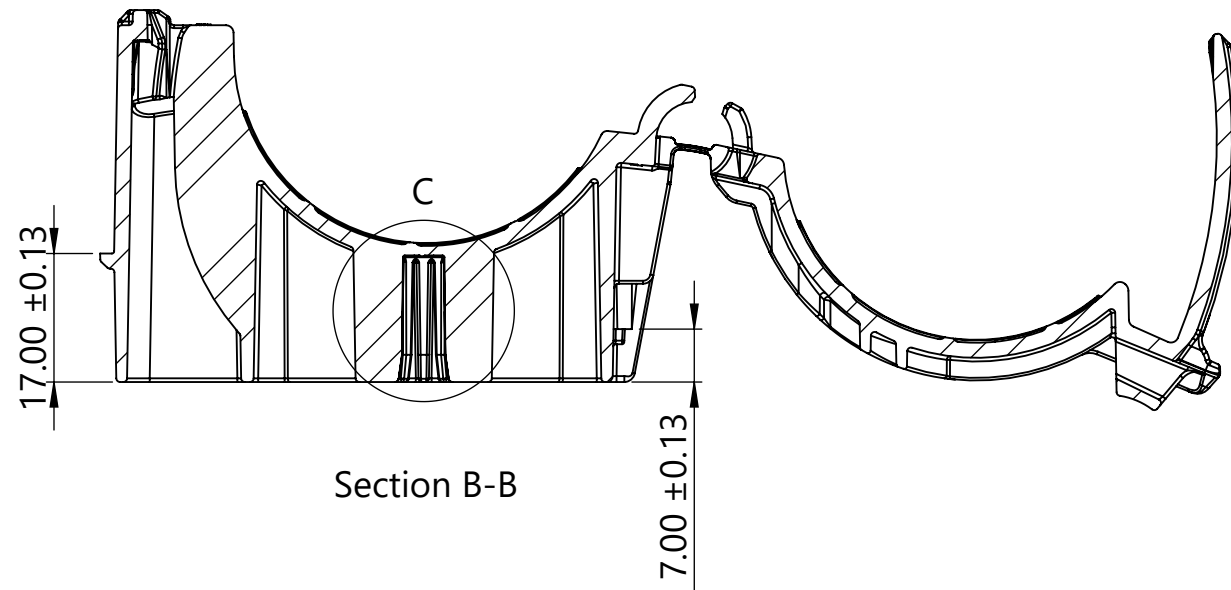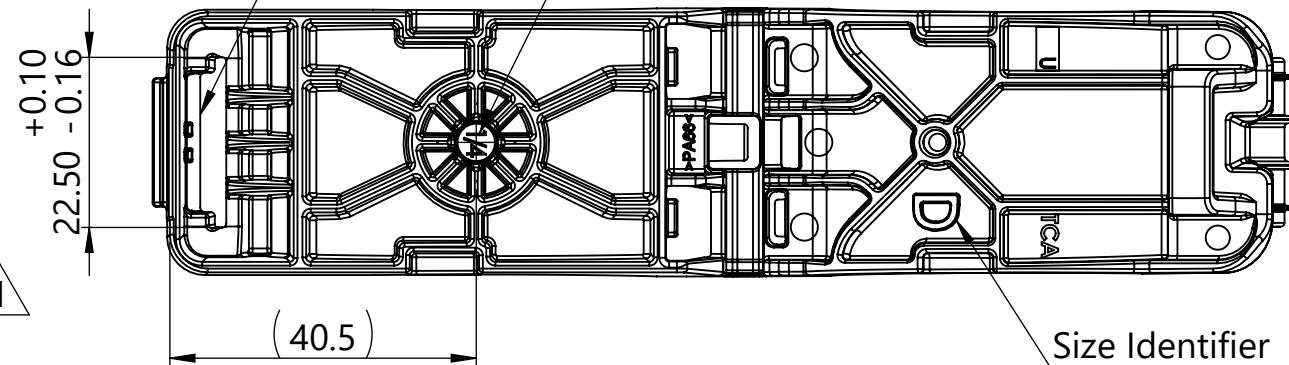


Section B-B

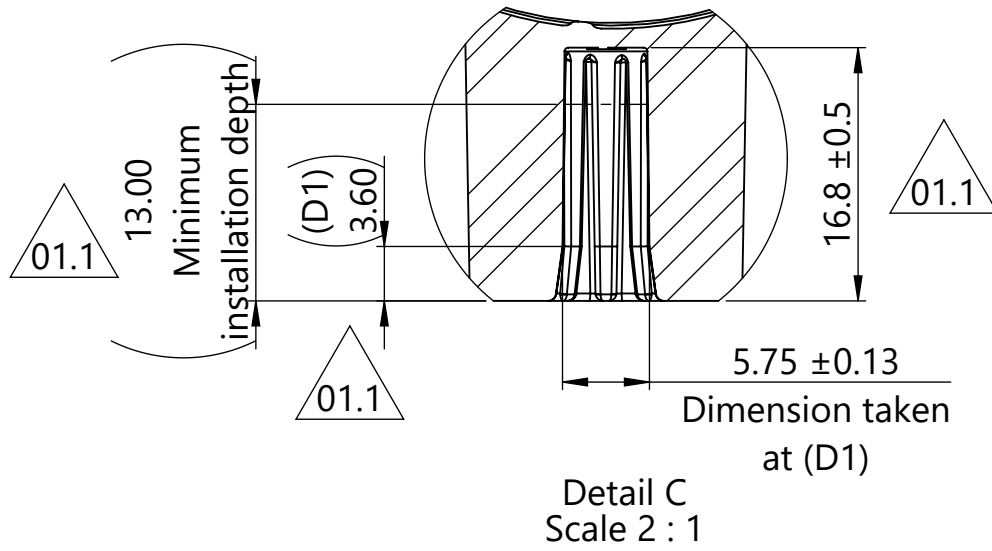


Detail C
Scale 2 : 1

0.10 Maximum flash or mismatch allowed around perimeter of strap


Saddle opening accommodates Straps up to 13.2 wide and 2.1 thick

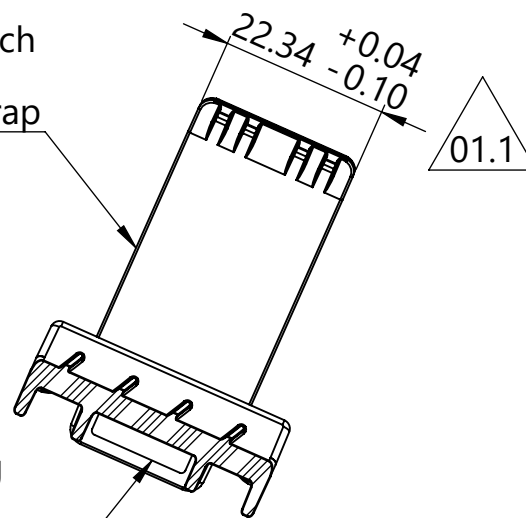

Section A-A

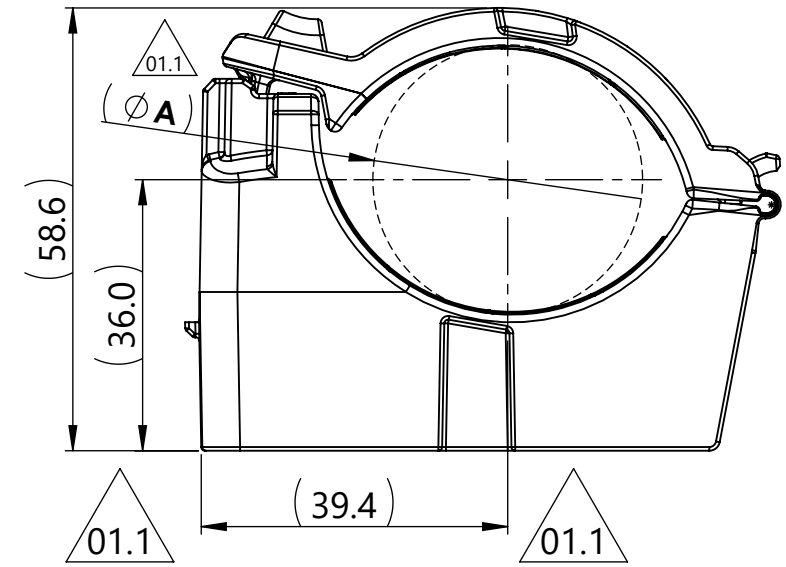

Minimum Bundle Diameter

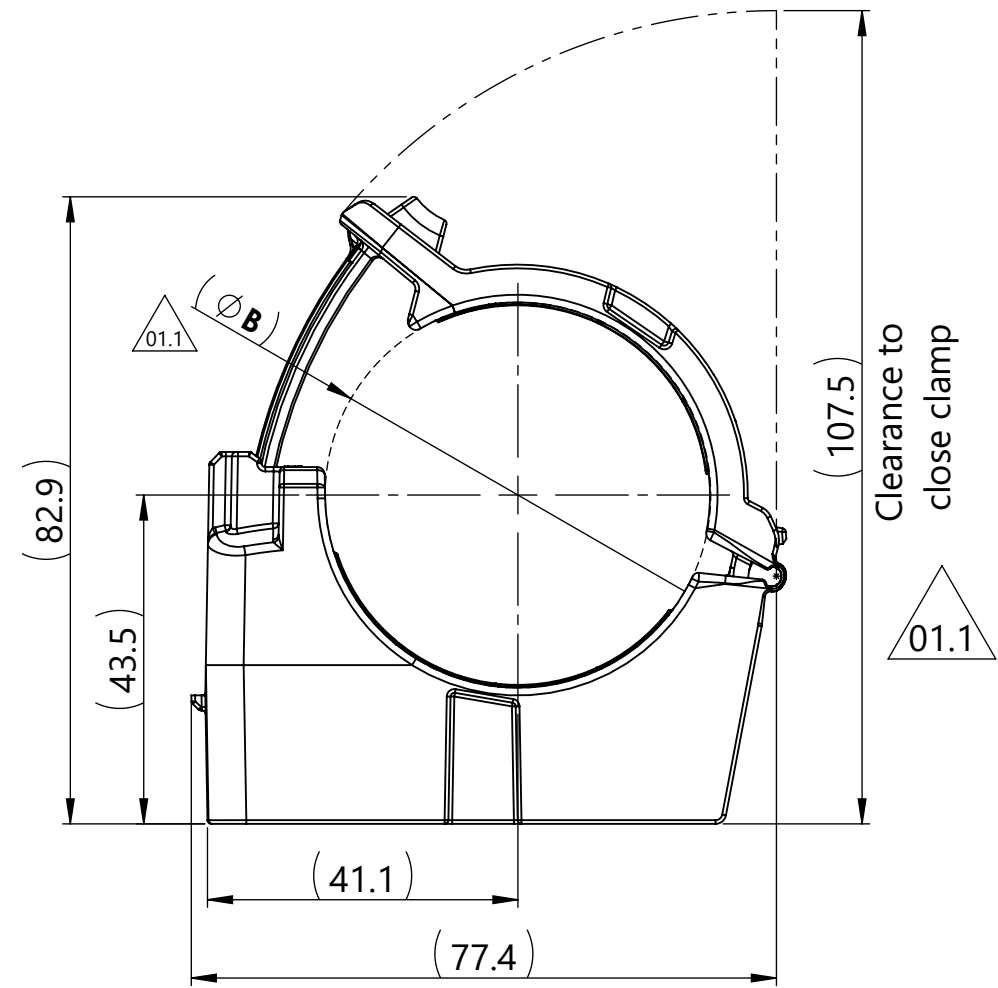

Maximum Bundle Diameter


Performance requirements:
Dry as molded with ≤ 0.5% moisture content:

- ITS-0001 Ratchet Clamp Split Mandrel Test: 1112 newtons [250 lbf] minimum at a nominal bundle diameter of 44.45 [1.750in]

Notes:

- Material: See chart
- Material color: See chart
- Maximum percent regrind permissible: 25%
- Maximum allowable flash to be: 0.50 "Unless otherwise noted"
- Maximum allowable mismatch to be: 0.15 "Unless otherwise noted"

Revision level			Revision Record		
Drawing	State	Part	ECN 017038		
01.1	Design Release	-			
Changed	Date (YYYY/MM/DD)				
Spangler	2022/06/02				
Approved	Date (YYYY/MM/DD)				
Toll	2022/06/02				



The copyright of this drawing is reserved by HellermannTyton.

Units
mm

HellermannTyton
www.HellermannTyton.com

Global Part Number		Global Part Description		Mounting Hole Size	Type Number	Material	Color
21-0236		CMRCDTR14-PA66HIRHSUV-BK		1/4"	CMRCDTR14	PA66HIRHSUV	Black

Title		Scale	
Center Mount RCD Ratchet P-Clamp, Size D, Clamp Range 36.0 to 51.0, 1/4 inch Threaded Rod		1:1	
Drawing-No		Format	
21-0236-004-CSU		A2	
Sheet		1/1	