

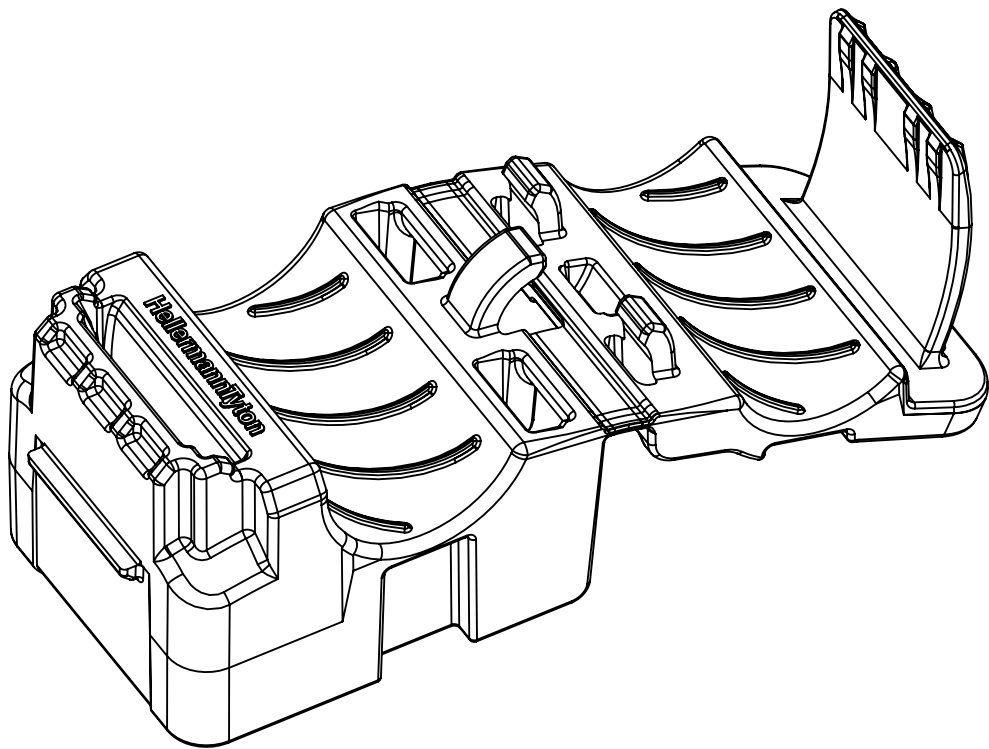


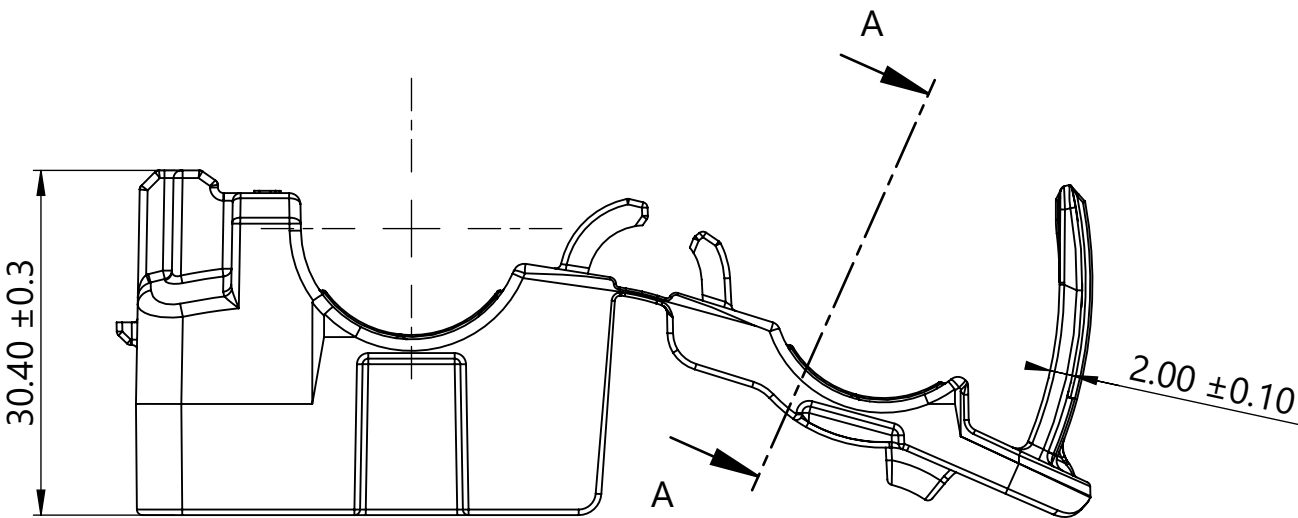


Isometric View
Product shipped in clamp open position

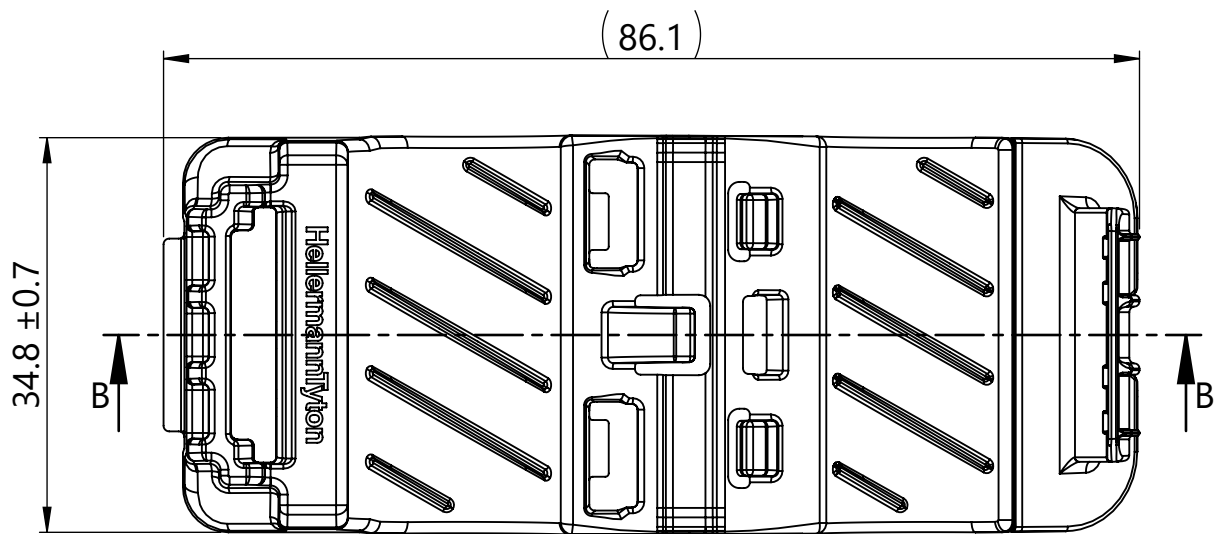


0.10 Maximum flash
or mismatch allowed
inside head


Mount size identifier

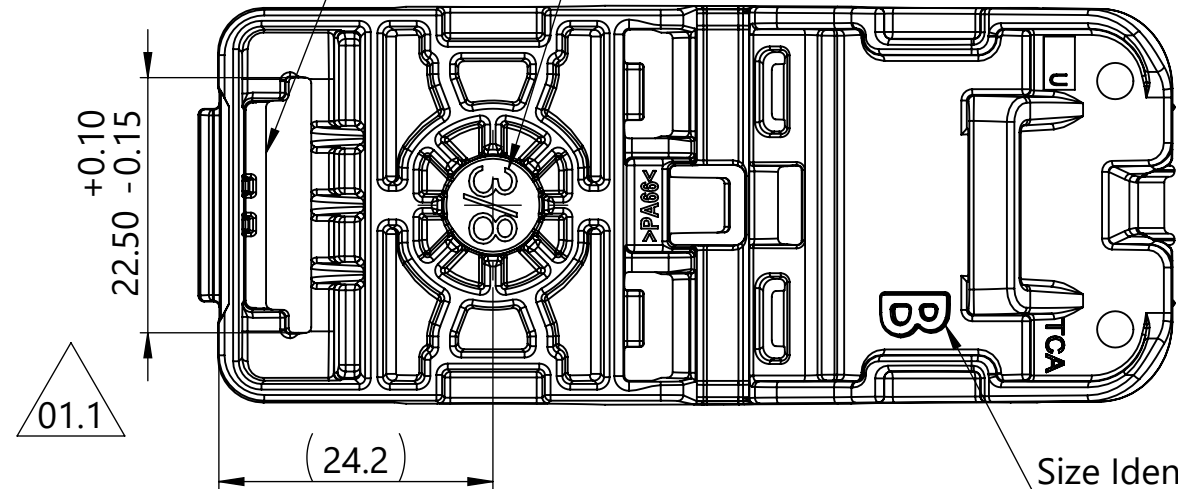

Size Identifier

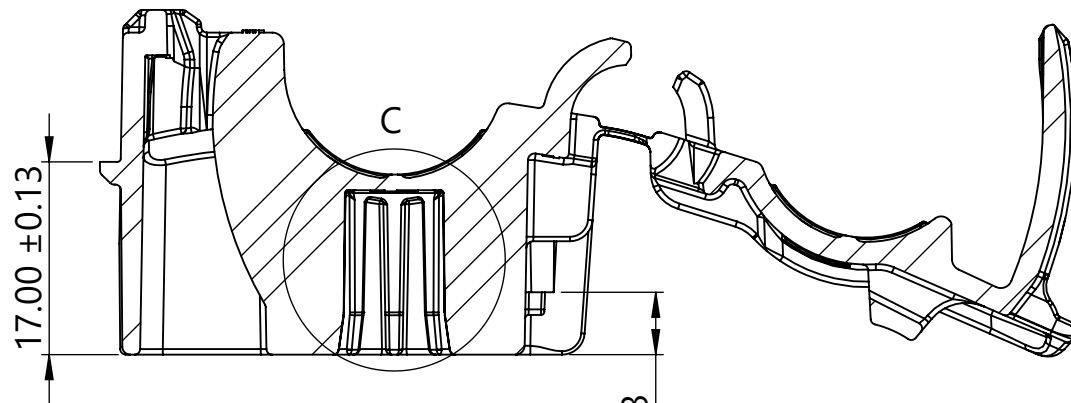


Section B-B

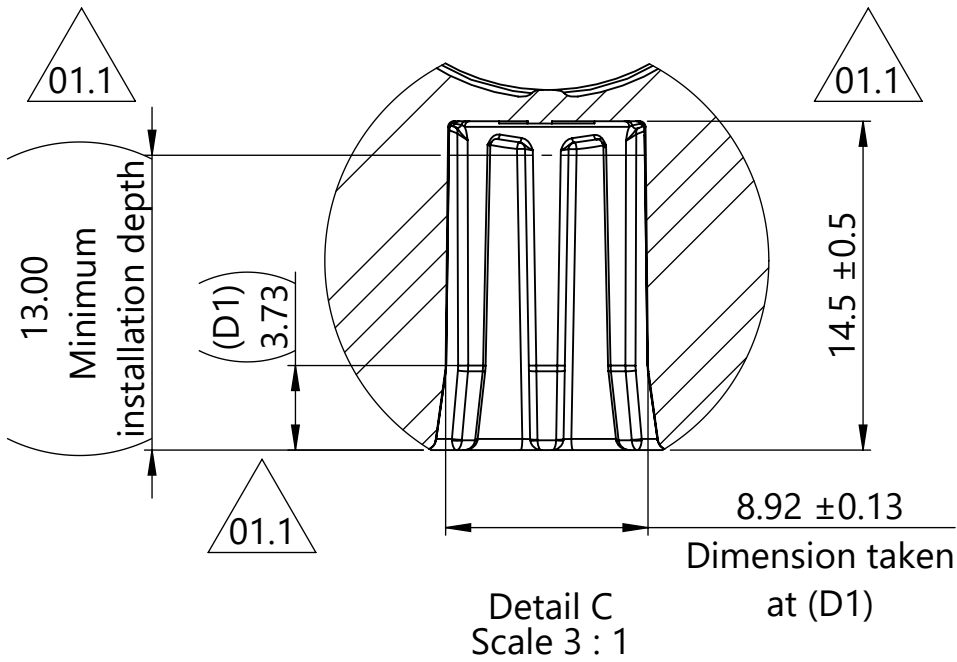


0.10 Maximum
flash or mismatch
allowed around
perimeter of strap


Saddle opening
accommodates
Straps up to 13.2
wide and 2.1 thick

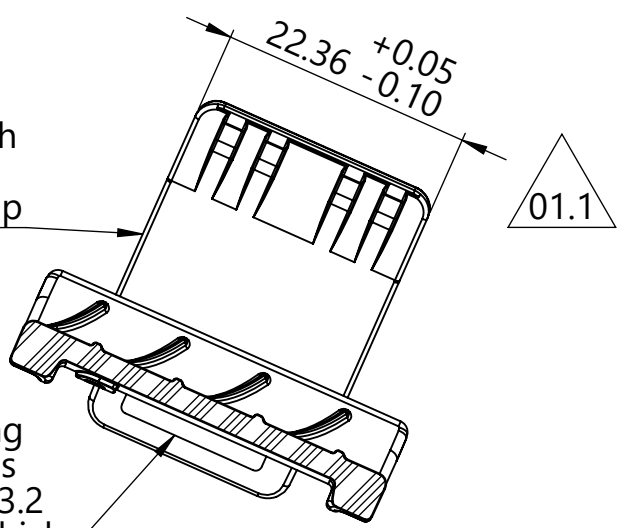

Section A-A

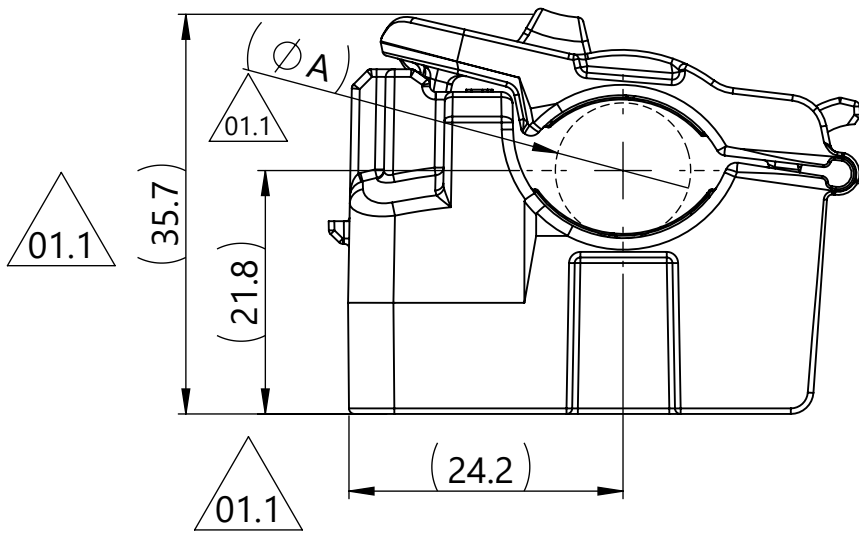

Minimum Bundle Diameter

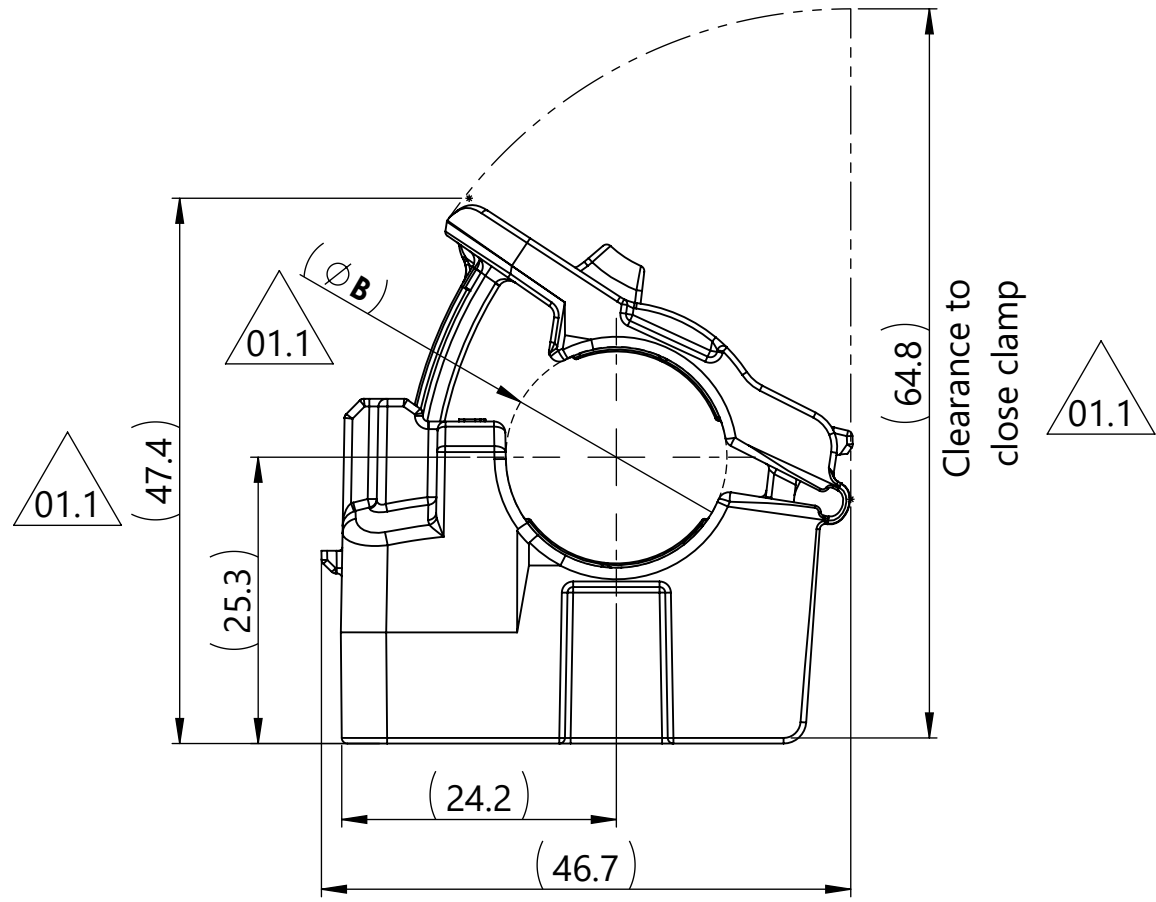

Maximum Bundle Diameter

Performance requirements:
Dry as molded with ≤ 0.5% moisture content:

1. ITS-0001 Ratchet Clamp Split Mandrel Test:
890 newtons [200 lbf] minimum at a nominal
bundle diameter of 15.88 [0.625in]

- Notes:
1. Material: See chart
 2. Material color: See chart
 3. Maximum percent regrind permissible: 25%
 4. Maximum allowable flash to be: 0.50 "Unless otherwise noted"
 5. Maximum allowable mismatch to be: 0.15 "Unless otherwise noted"

Bundle Types	A Minimum Diameter (Reference)	B Maximum Diameter (Reference)
Soft	12.7	19.5
Hard	11.9	18.7

Global Part Number	Global Part Description	Mounting Hole Size	Type Number	Material	Color
21-0237	CMRCBTR38-PA66HIRHSUV-BK	3/8"	CMRCBTR38	PA66HIRHSUV	Black

Revision level			Revision Record				Drawn		Date (YYYY/MM/DD)	CMRCBTR38		
Drawing	State	Part	ECN 017163				Spangler		2021/04/09	Title Center Mount RCB Ratchet P-Clamp, Size B, Clamp Range 12.7 to 19.5, 3/8 inch Threaded Rod	Scale 3:2	
01.1	Design Release	-					Approved		Date (YYYY/MM/DD)		Global Project Number 21-0237	
Changed	Date (YYYY/MM/DD)						Toll		2021/04/09		Drawing-No 21-0237-002-CSU	
Spangler			2022/09/02			All drawing revision are stored in CAD PDM database	Units mm	HellermannTyton www.HellermannTyton.com		Format A2		
Approved			Date (YYYY/MM/DD)							Sheet 1/1		
Toll			2022/09/02									