

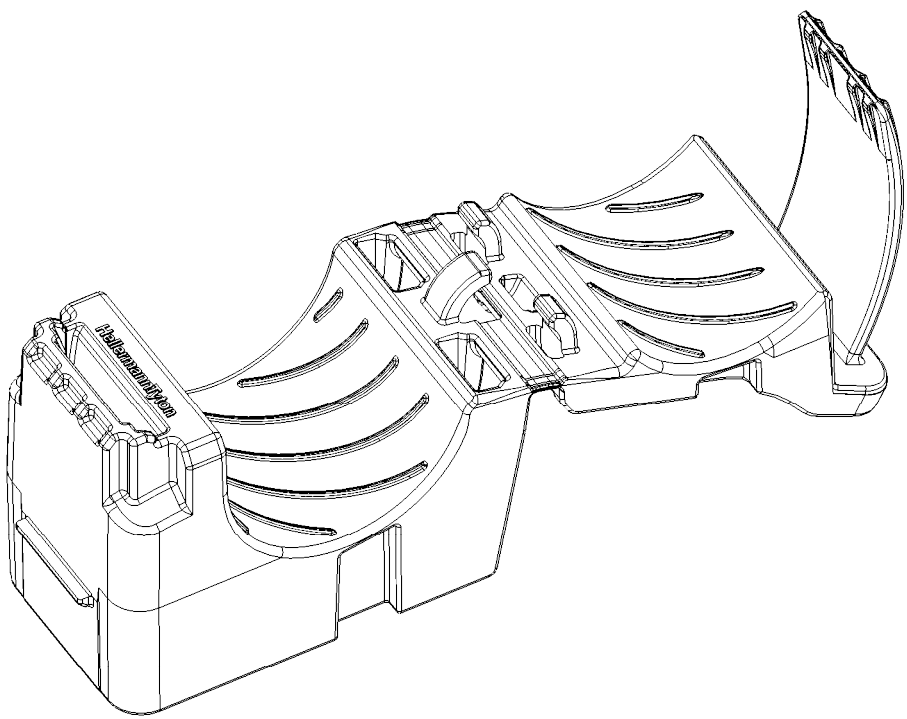



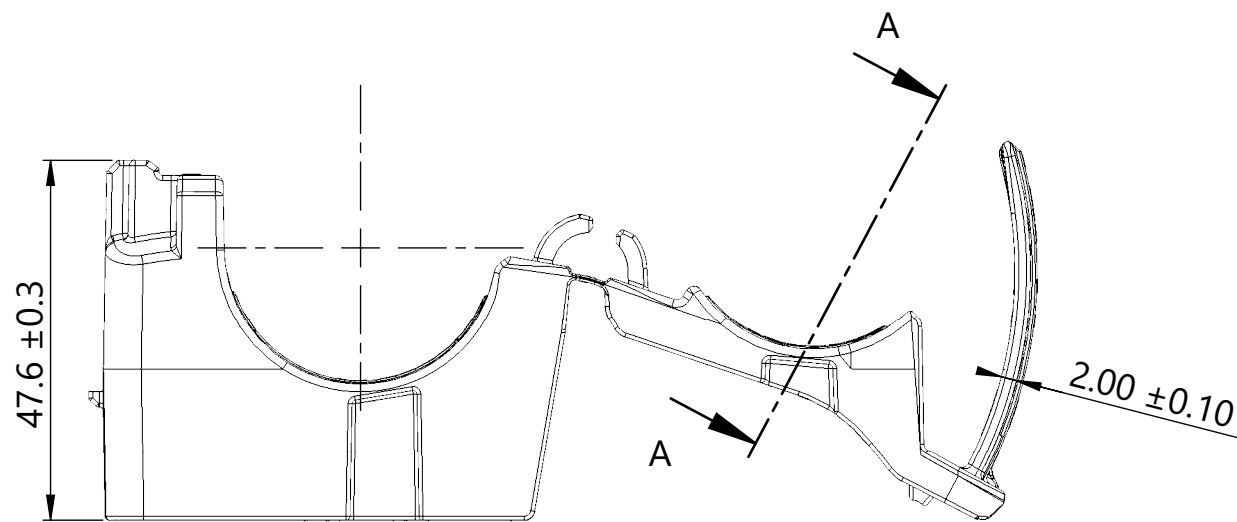


Isometric View
Product shipped in clamp open position

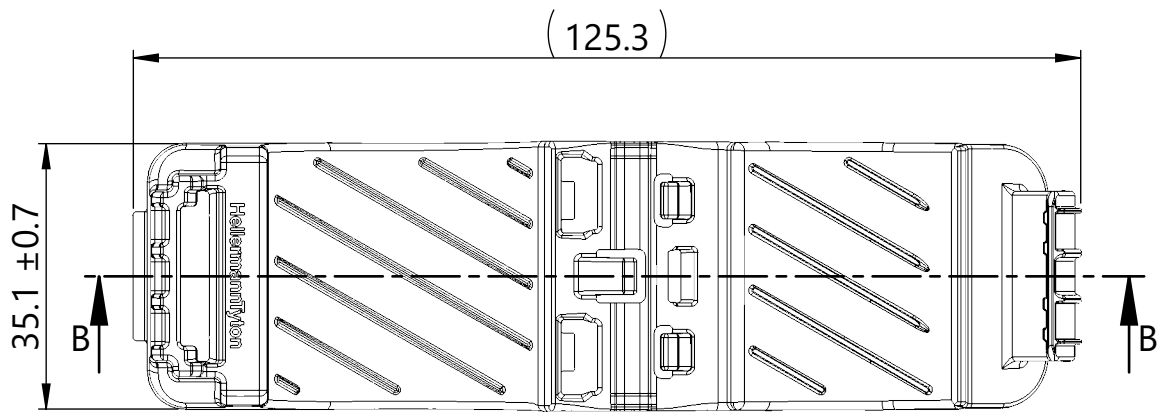


0.10 Maximum flash or mismatch allowed inside head

Mount size identifier

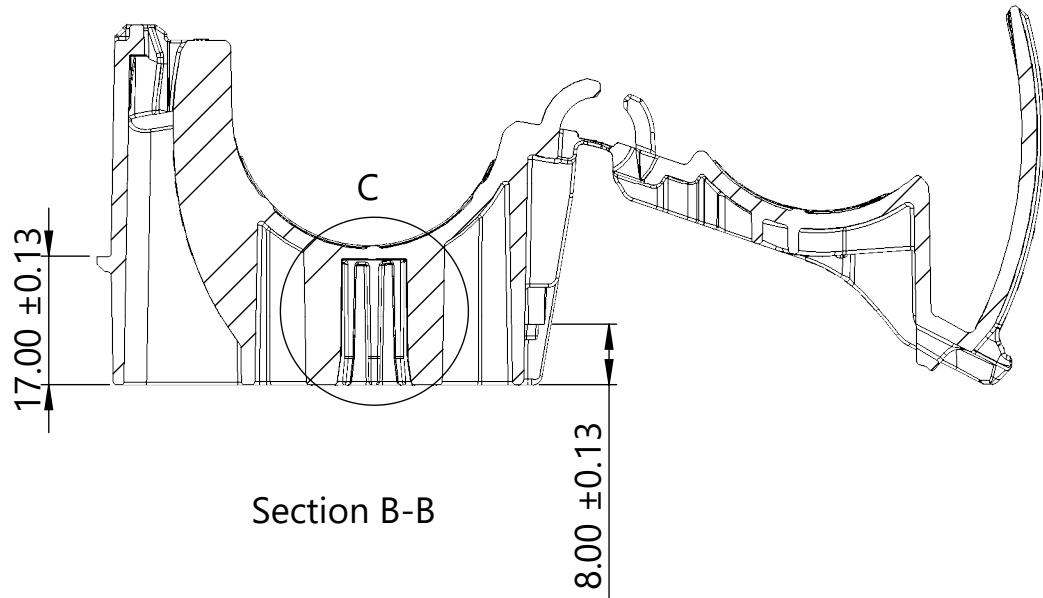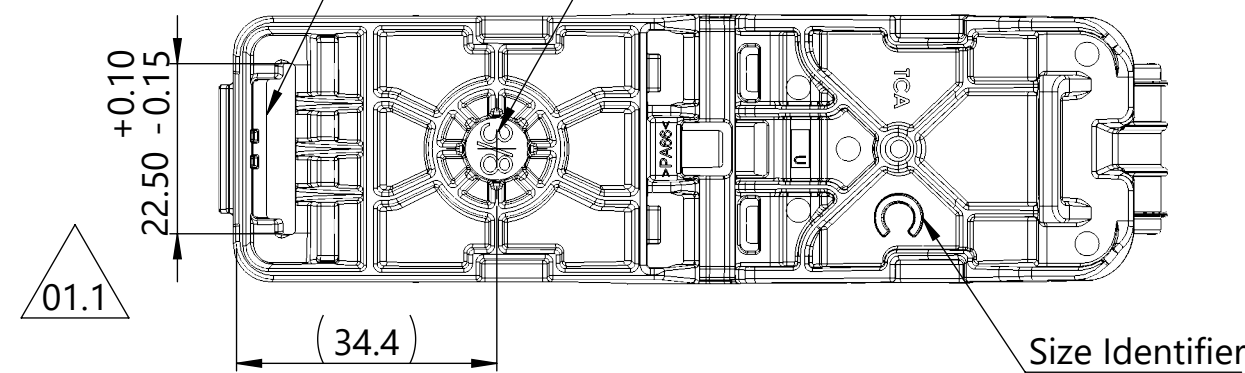


Section B-B

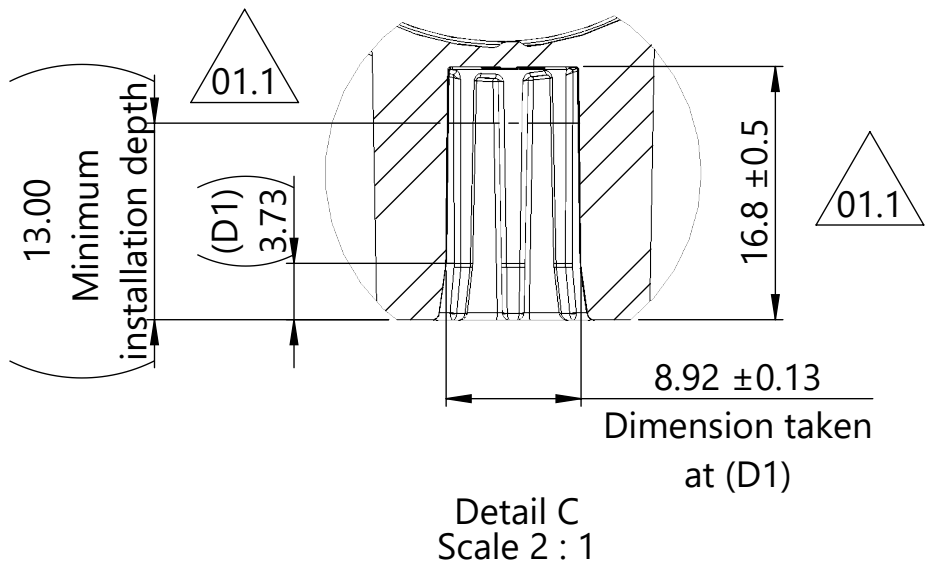


0.10 Maximum flash or mismatch allowed around perimeter of strap


Saddle opening accommodates Straps up to 13.2 wide and 2.1 thick

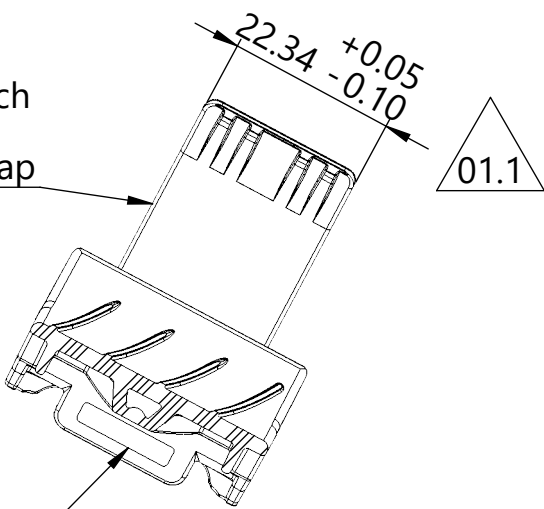

Section A-A

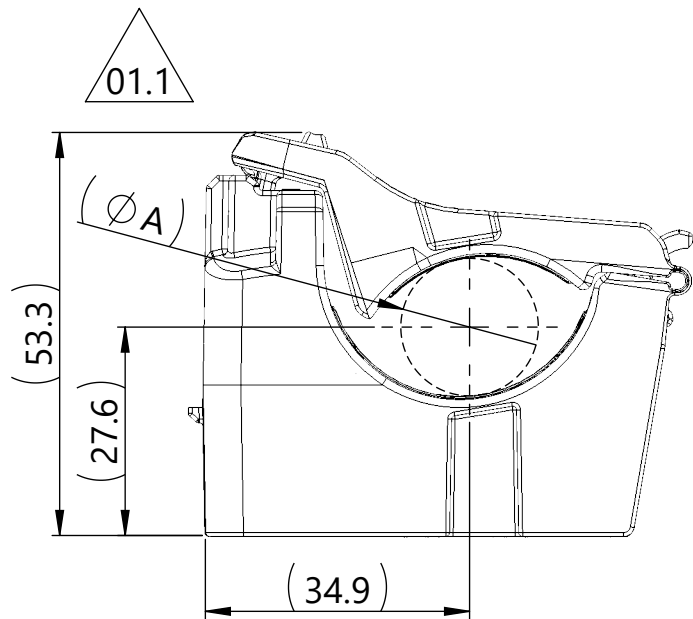

Minimum Bundle Diameter

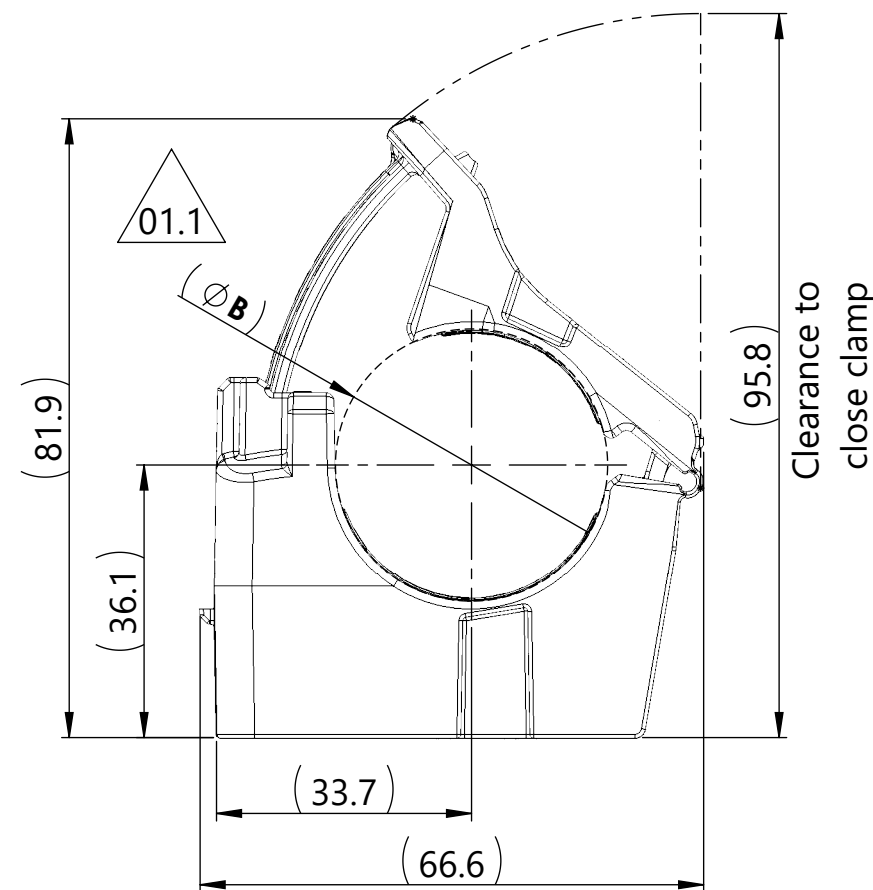

Maximum Bundle Diameter

Performance requirements:


Dry as molded with ≤ 0.5% moisture content:

1. ITS-0001 Ratchet Clamp Split Mandrel Test: 1112 newtons [250 lbf] minimum at a nominal bundle diameter of 25.40 [1.000in]

Notes:

1. Material: See chart
2. Material color: See chart
3. Maximum percent regrind permissible: 25%
4. Maximum allowable flash to be: 0.50 "Unless otherwise noted"
5. Maximum allowable mismatch to be: 0.15 "Unless otherwise noted"

Revision level			Revision Record	
Drawing	State	Part	ECN 016968	
01.1	Design Release	-		
Changed	Date (YYYY/MM/DD)			
Spangler	2022/04/14			
Approved	Date (YYYY/MM/DD)			
Gallion	2022/04/14			



The copyright of this drawing is reserved by HellermannTyton.

Units
mm

Drawn	Date (YYYY/MM/DD)	CMRCCTR38 Center Mount RCC Ratchet P-Clamp, Size C, Clamp Range 18.9 to 36.0, 3/8 inch Threaded Rod
Spangler	2021/04/28	
Approved	Date (YYYY/MM/DD)	
Toll	2021/04/28	

HellermannTyton
www.HellermannTyton.com

Global Part Number	Global Part Description	Mounting Hole Size	Type Number	Material	Color
21-0238	CMRCCTR38-PA66HIRHSUV-BK	3/8"	CMRCCTR38	PA66HIRHSUV	Black

Drawing-No	21-0238-003-CSU
Scale	1:1
Global Project Number	21-0238
Format	A2
Sheet	1/1