

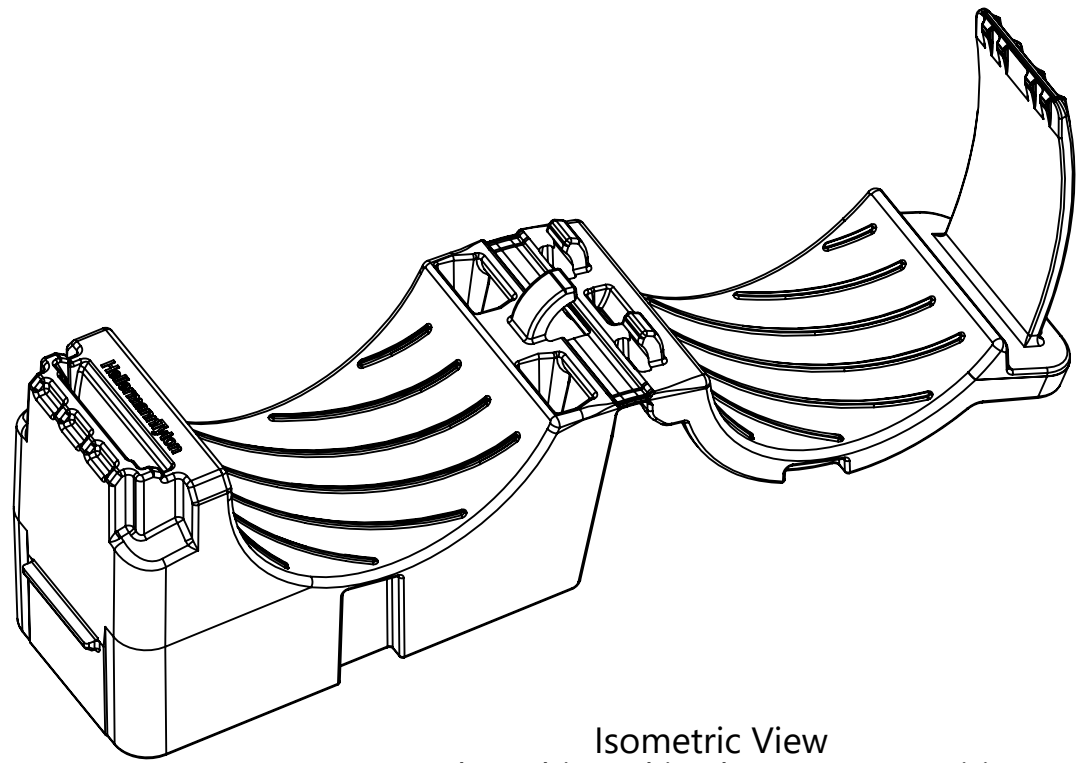


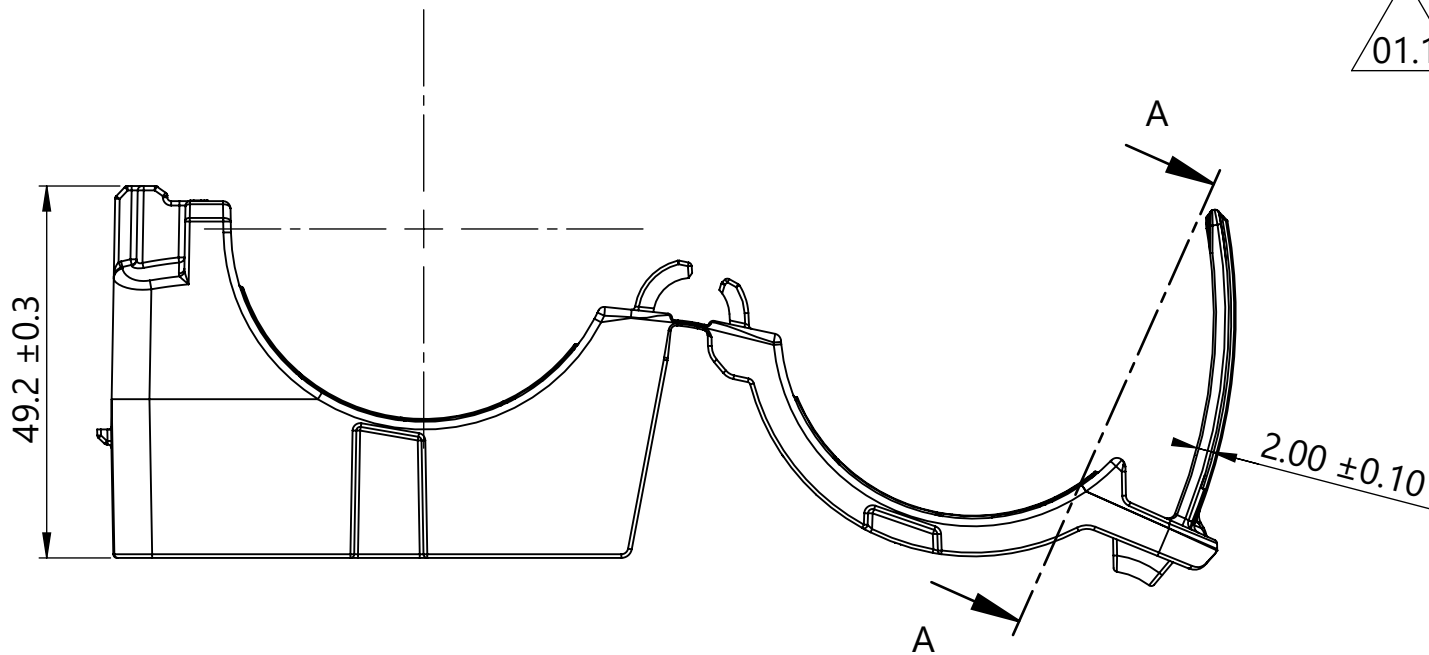


Isometric View
Product shipped in clamp open position

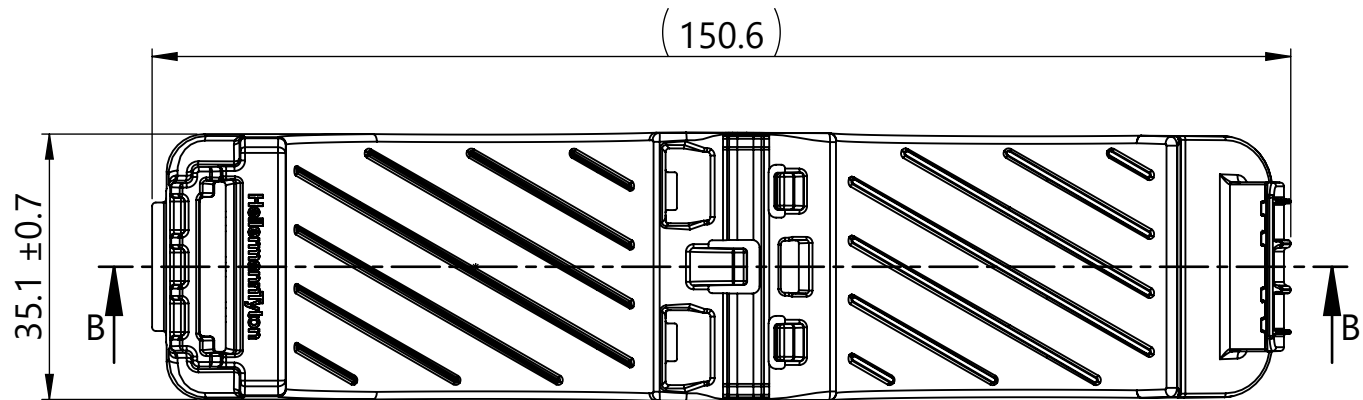


0.10 Maximum flash
or mismatch allowed
inside head


Mount size identifier

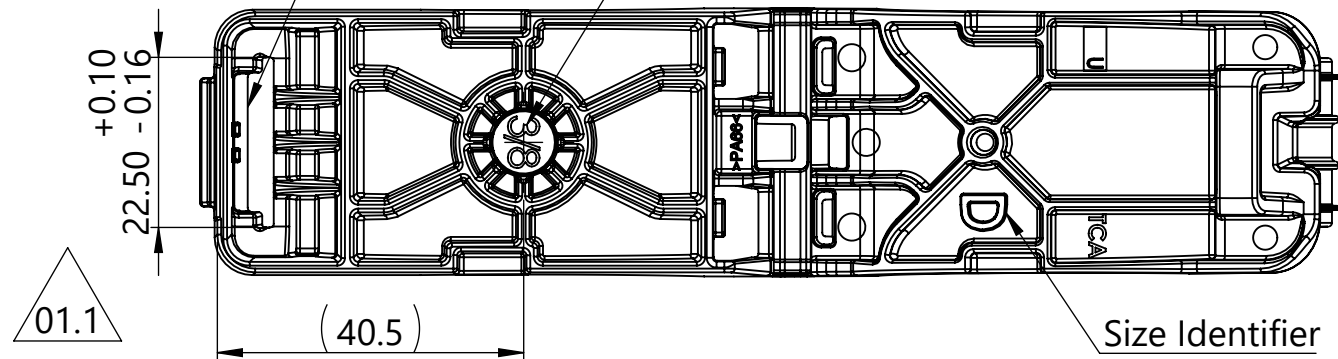

Size Identifier

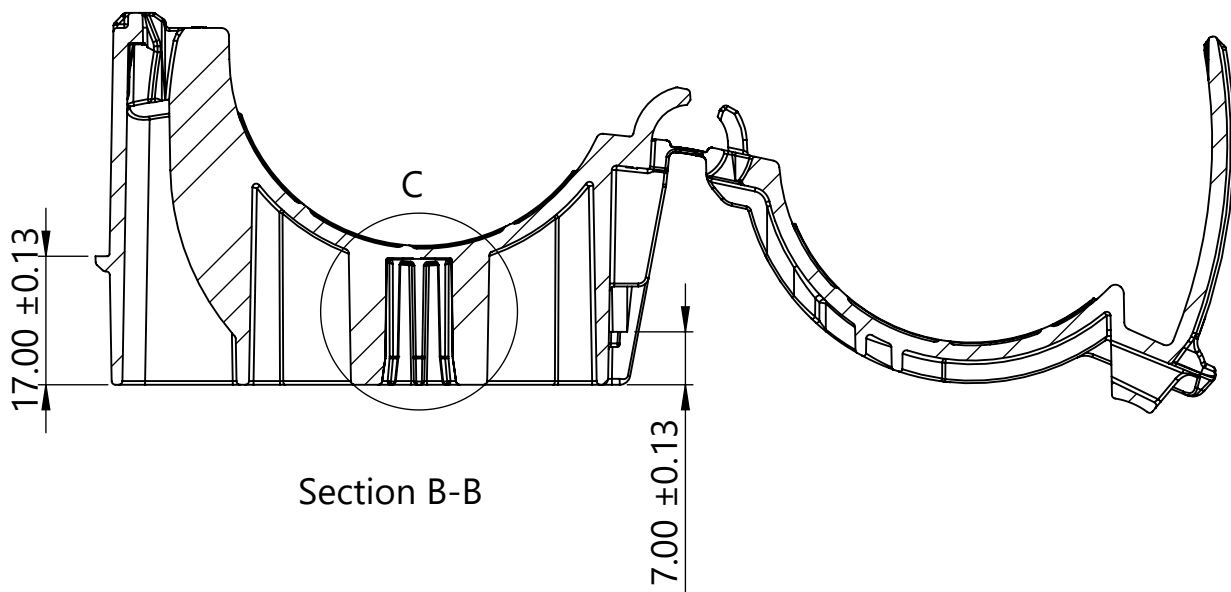


Section B-B

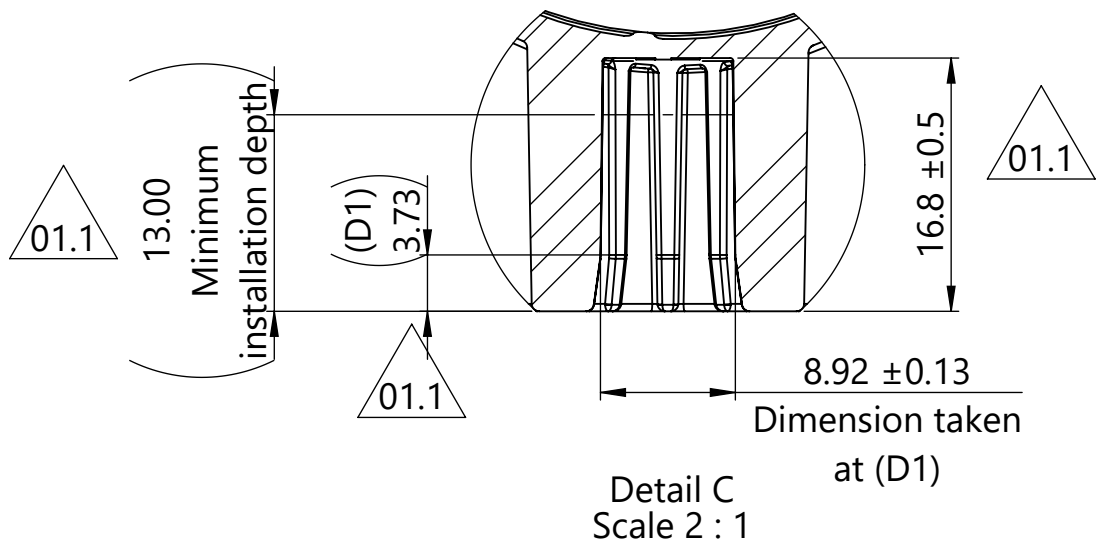


Detail C
Scale 2 : 1

0.10 Maximum
flash or mismatch
allowed around
perimeter of strap

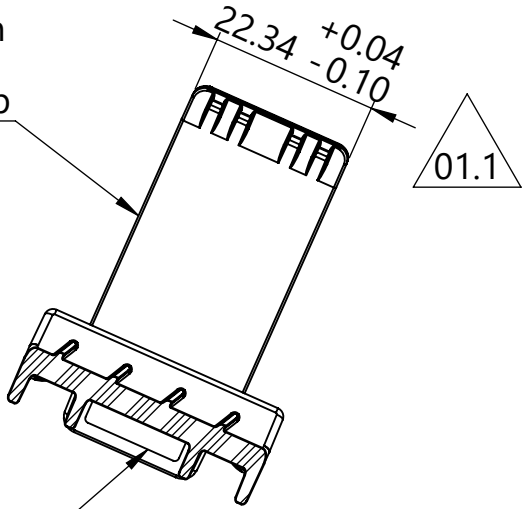


Section A-A

Saddle opening
accommodates
Straps up to 13.2
wide and 2.1 thick

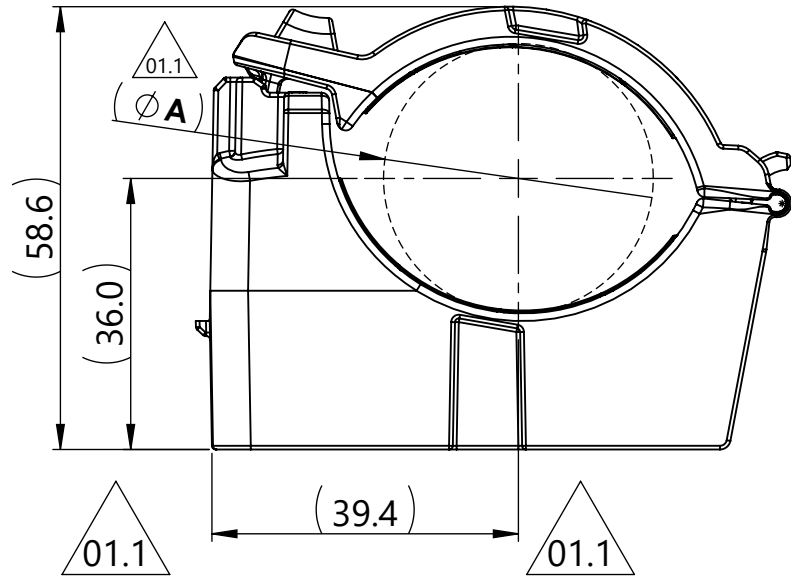

Minimum Bundle Diameter

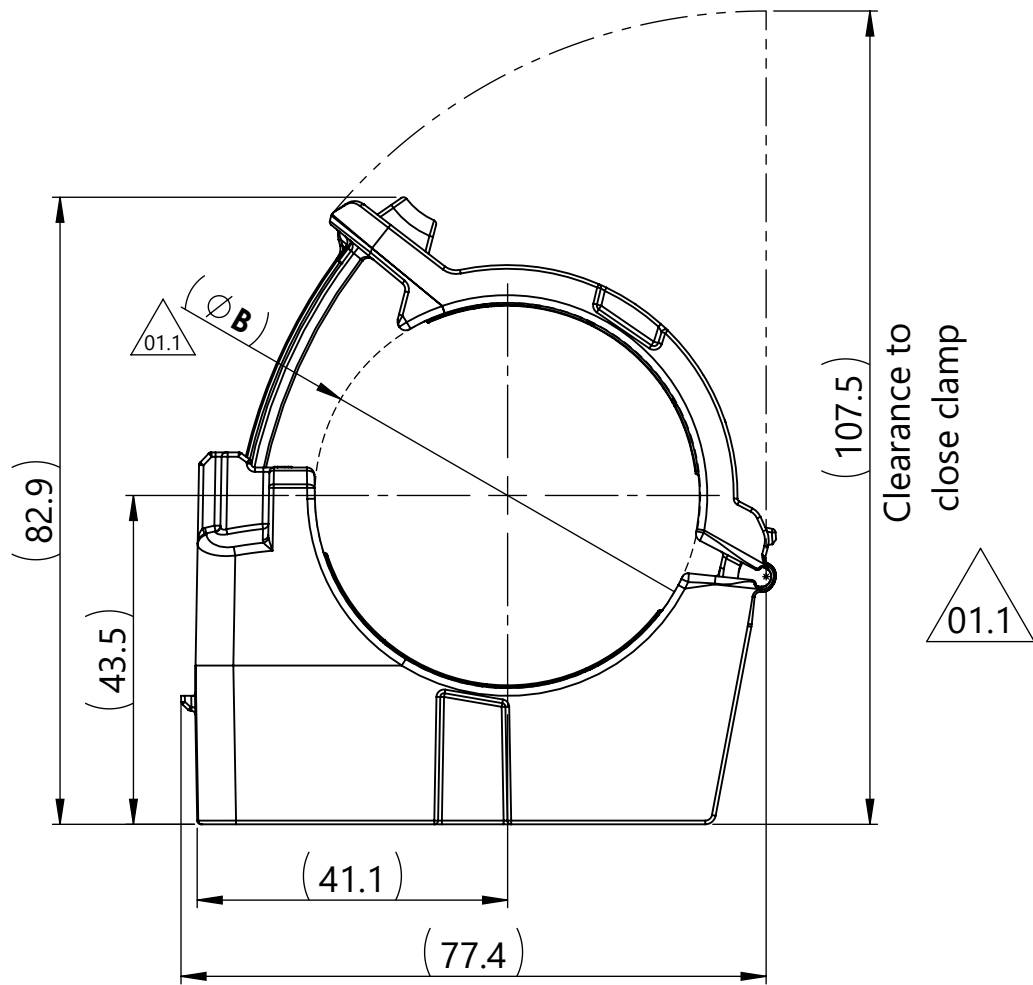

Maximum Bundle Diameter


Performance requirements:
Dry as molded with ≤ 0.5% moisture content:

1. ITS-0001 Ratchet Clamp Split Mandrel Test:
1112 newtons [250 lbf] minimum at a nominal
bundle diameter of 44.45 [1.750in]

Notes:

1. Material: See chart
2. Material color: See chart
3. Maximum percent regrind permissible: 25%
4. Maximum allowable flash to be: 0.50 "Unless otherwise noted"
5. Maximum allowable mismatch to be: 0.15 "Unless otherwise noted"

Revision level			Revision Record	
Drawing	State	Part	ECN 017038	
01.1	Design Release	-		
Changed	Date (YYYY/MM/DD)			
Spangler	2022/06/02			
Approved	Date (YYYY/MM/DD)			
Toll	2022/06/02			



The copyright of
this drawing is
reserved by
HellermannTyton.

Units
mm

HellermannTyton
www.HellermannTyton.com

Drawn	Date (YYYY/MM/DD)
Spangler	2021/04/28
Approved	Date (YYYY/MM/DD)
Toll	2021/04/28

Title Center Mount RCD Ratchet P-Clamp, Size D,
Clamp Range 36.0 to 51.0, 3/8 inch Threaded Rod

Drawing-No
21-0239-004-CSU

Scale 1:1
Global Project Number 21-0239
Format A2
Sheet 1/1

Bundle Types	A Minimum Diameter (Reference)	B Maximum Diameter (Reference)
	Soft	Hard
01.1	36.0	51.0
	35.2	49.9