


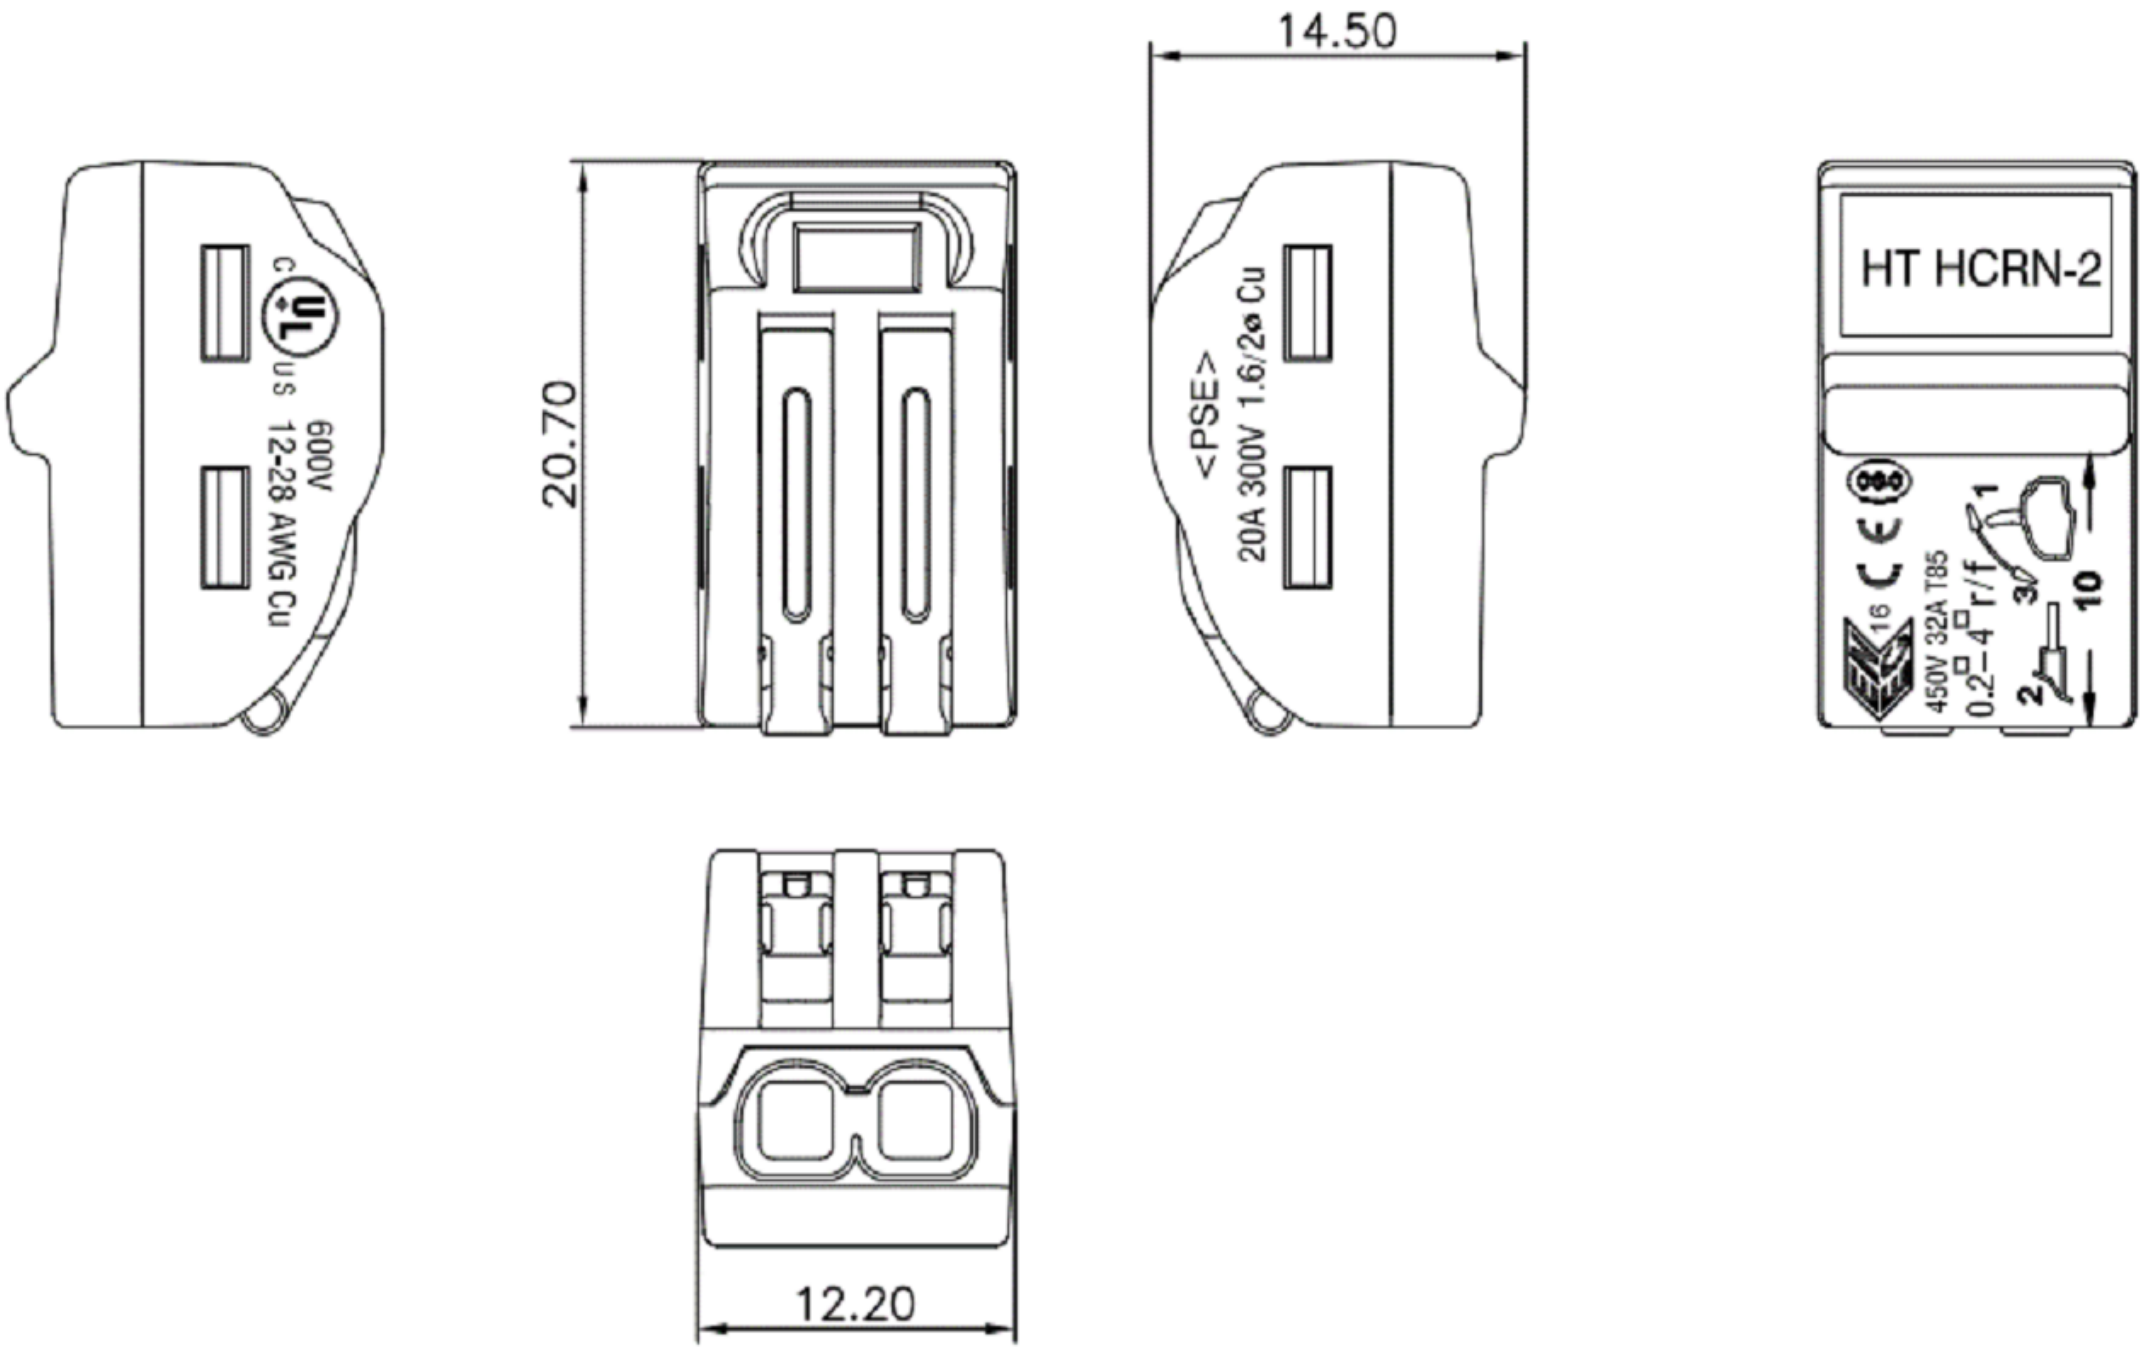

STRIPPING LENGTH:

10mm (0.39 in.)

WIRE RANGE:

28-14 AWG, Solid / Stranded

#12 AWG Solid Cu (UL)

FLAMMABILITY:

UL94-V0

WORKING TEMP:

-30°C (-22°F) TO 85°C (185°F)

VOLTAGE:

450V (VDE) 85°C

600V (CULUS) 105°C

CERTIFICATIONS:

cULus, CE, ENEC, FIMKO, CQC

Revision level			Revision Record			Drawn		Date (YYYY/MM/DD)	HCRN-2 SERIES						
Drawing	State	Part	016553			JMC	2021/06/22	Title	Helacon Releasable Wire Connector, 2-port, Clear		Scale	2:1			
00.0	Design Release	-				Approved	Date (YYYY/MM/DD)	Units mm HellermannTyton www.HellermannTyton.com		Drawing-No	21-0275-001-CSU		Global Project Number	21-0275	
Changed		Date (YYYY/MM/DD)				JPG	2021/06/22			Format	A3				
JMC	20021/06/22					All drawing revision are stored in CAD PDM database				Sheet		1/1			
Approved	Date (YYYY/MM/DD)														
JPG	2021/06/22														

The copyright of this drawing is reserved by HellermannTyton.

HellermannTyton
www.HellermannTyton.com