

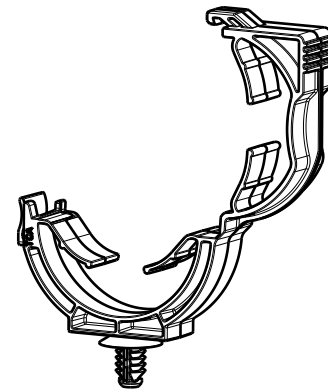


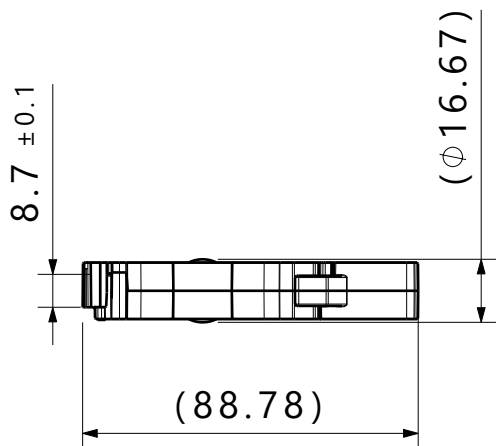

Isometric view



Isometric view
Closed position



Reference:

Performance requirements at dry as molded:

1. Fir tree push in force: 45 newtons (10 lbf) max in the applicable nominal hole size and a plate thickness of 1.8mm.
2. Fir tree pull out force: 110 newtons (25 lbf) min in the applicable nominal hole size and a plate thickness of 1.8mm.

Notes:

1. Material: See chart
2. Material color: See chart
3. Maximum percent regrind permissible: 25%
4. Max allowable flash to be: 0.5mm
5. Max allowable mismatch to be: 0.1mm
6. Sheet metal thickness range: 0.60mm - 6.00mm
7. Applicable hole size:
 - A. 6.5mm +0.5/- 0.4
 - B. 6.35mm +/-0.25 Hex

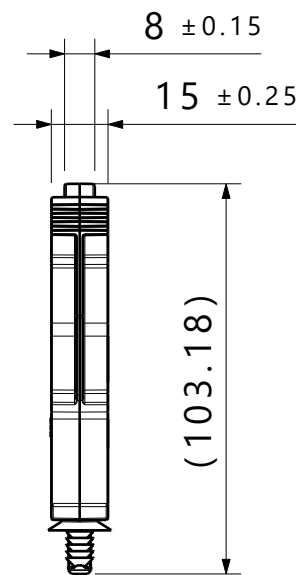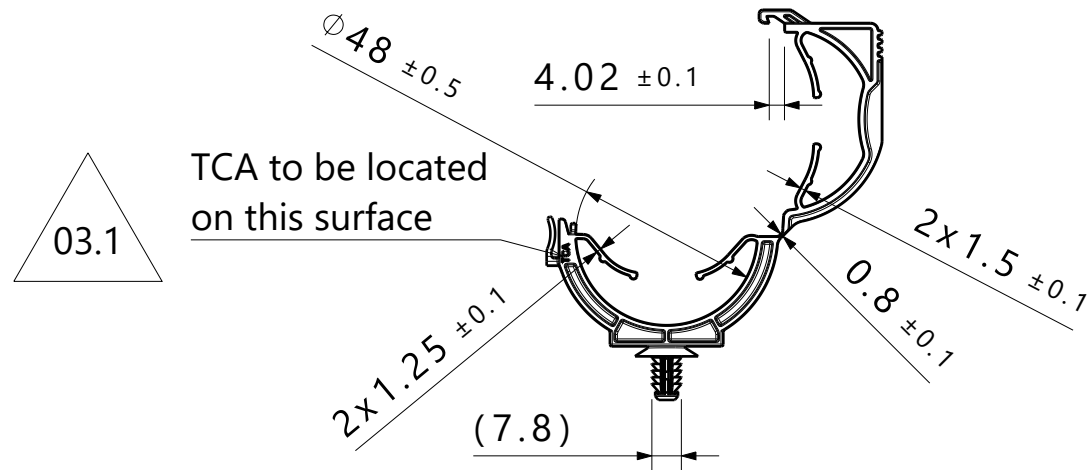

Global Part Description	Material	Color
LOC38-43FT6.5-PA66HIRHSUV-BK	PA66HIRHSUV	Black

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.	Drawn	Date (YYYY/MM/DD)	Title Locking omega clip for 38 to 43mm bundles with 6.5mm fir tree		Scale 1:2			
Drawing	State	Part	ECN 017429				Fish	2021/06/30			Global Project Number 21-0294			
03.1	Design Release	-				All drawing revisions are stored in CAD PDM database	Approved	Date (YYYY/MM/DD)	Drawing-No 21-0294-001-CSU		Format A3			
Changed	Date (YYYY/MM/DD)						VanHulst	2021/09/08			Sheet 1 / 1			
Fish	2023/03/15													
Approved	Date (YYYY/MM/DD)													
VanHulst	2023/03/15													