


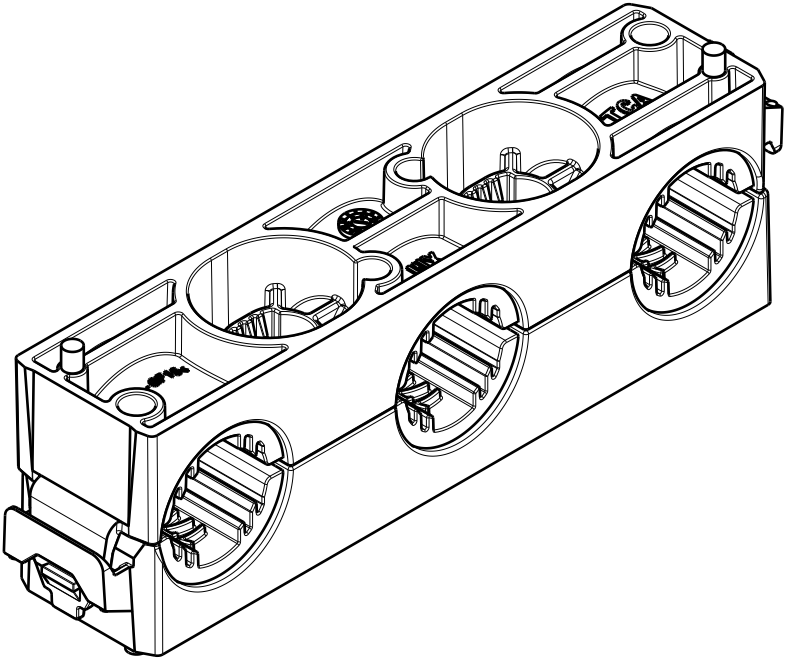
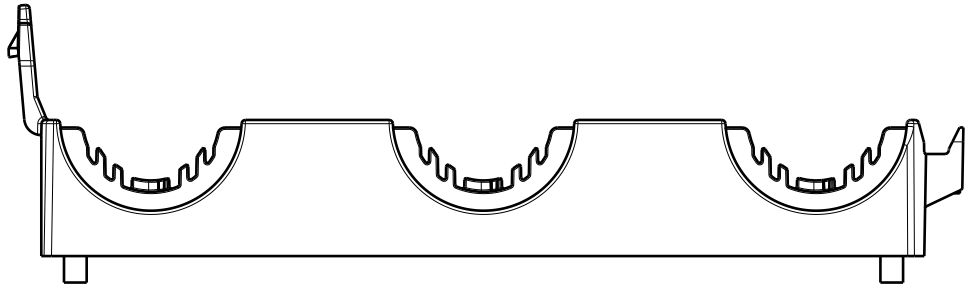


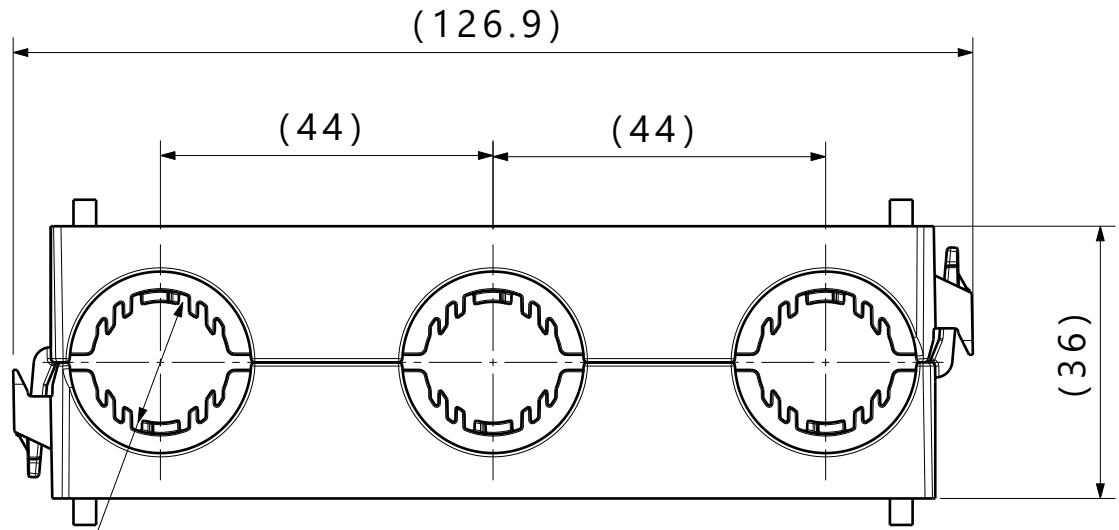

Assembled example isometric view

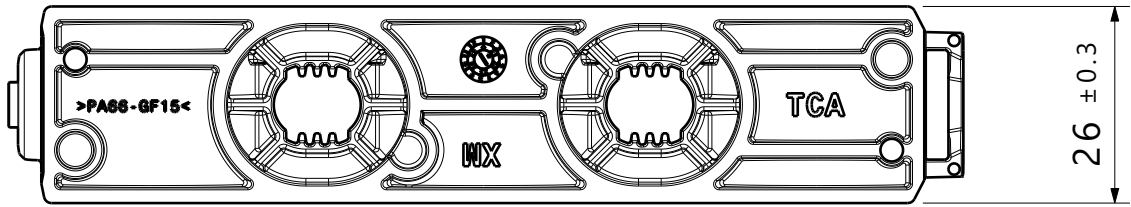

Delivery condition



Assembled example front view

- Notes:
1. Material: See chart
 2. Material color: See chart
 3. Maximum percent regrind permissible: 0%
 4. Max allowable flash to be: 0.50mm
 5. Max allowable mismatch to be: 0.1mm
 6. Threaded stud length to be at least: 40mm
 7. Applicable stud size:
 - A. M8 x 1.25 Threaded
 8. Two HDC17X3 clamp halves are required for a functional clamp assembly



Global Part Description	Housing		
	Drawing	Material	Color
HDC17X3-PA66GF15/TPE-BK	21-0308-005-CSU	PA66GF15/TPE	Black

Revision Level			Revision Record		 	The copyright of this drawing is reserved by HellermannTyton.		Drawn		Date (YYYY/MM/DD)										
Drawing	State		Part	ECN 311190		 	All drawing revisions are stored in CAD PDM database	Rohde		2021/09/02		Title		Scale 1:1						
04.1	Design Release				Approved			Date (YYYY/MM/DD)		Global Project Number										
Changed		Date (YYYY/MM/DD)			Units mm			HellermannTyton www.HellermannTyton.com		Drawing-No 21-0308-105-CSU		Format A3								
Rohde		2024/05/30												Haftarski		2022/01/14		Sheet 1 / 1		
Approved		Date (YYYY/MM/DD)																		
Van Hulst		2024/05/30																		

HellermannTyton
www.HellermannTyton.com