



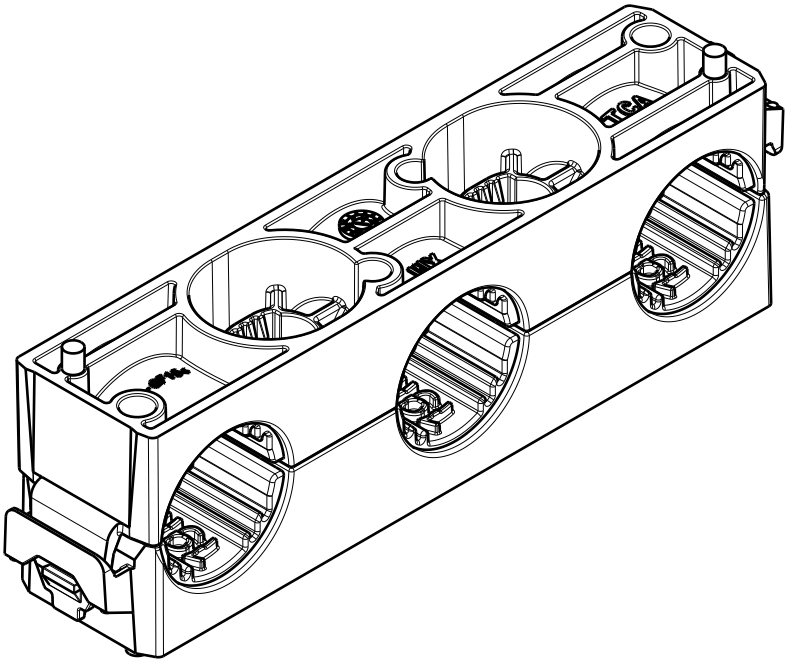


Assembled example isometric view

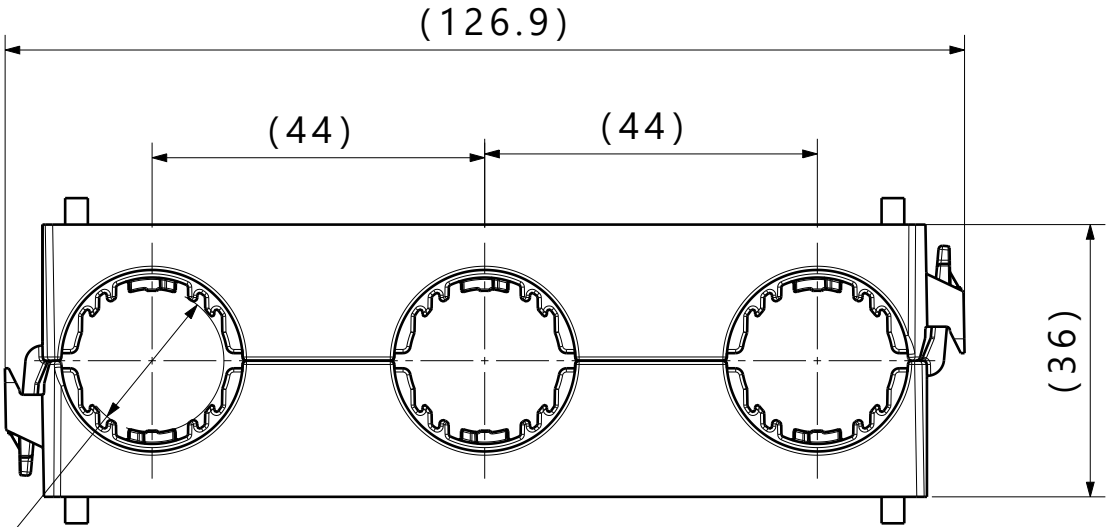


Assembled example front view



3X(Ø19)

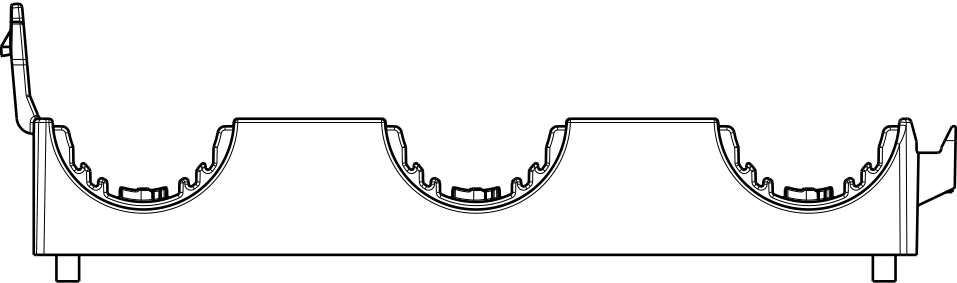

Delivery condition




- Notes:
- 1. Material: See chart
 - 2. Material color: See chart
 - 3. Maximum percent regrind permissible: 0%
 - 4. Max allowable flash to be: 0.50mm
 - 5. Max allowable mismatch to be: 0.1mm
 - 6. Threaded stud length to be at least: 40mm
 - 7. Applicable stud size:
 - A. M8 x 1.25 Threaded
 - 8. Two HDC19X3 clamp halves are required for a functional clamp assembly

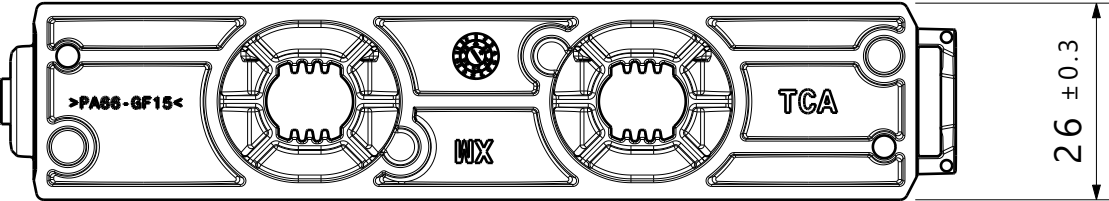

Global Part Description	Housing		
	Drawing	Material	Color
HDC19X3-PA66GF15/TPE-BK	21-0310-005-CSU	PA66GF15	Grey

Revision Level		
Drawing	State	Part
03.2	Design Release	
Changed		Date (YYYY/MM/DD)
Rohde		2024/05/30
Approved		Date (YYYY/MM/DD)
Van Hulst		2024/05/30

Revision Record		
ECN	311190	



All drawing revisions are stored in CAD PDM database

The copyright of this drawing is reserved by HellermannTyton.

Drawn	Date (YYYY/MM/DD)
Rohde	2021/09/02
Approved	Date (YYYY/MM/DD)
Haftarski	2022/01/14

HellermannTyton
www.HellermannTyton.com

Title Triple clamp with 19mm hose cover	Scale 1:1
	Global Project Number 21-0310
Drawing-No 21-0310-105-CSU	Format A3
	Sheet 1 / 1