




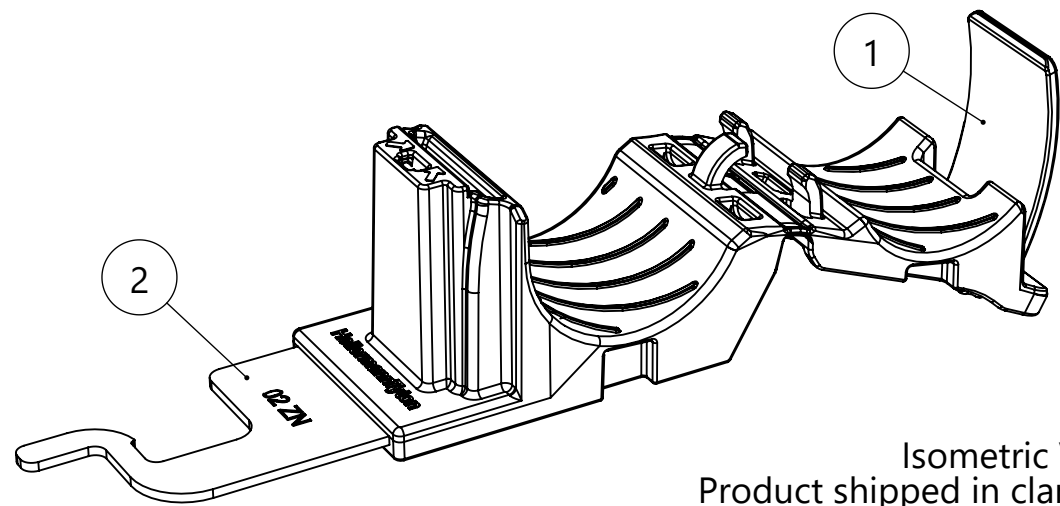




Isometric View
Product shipped in clamp open position

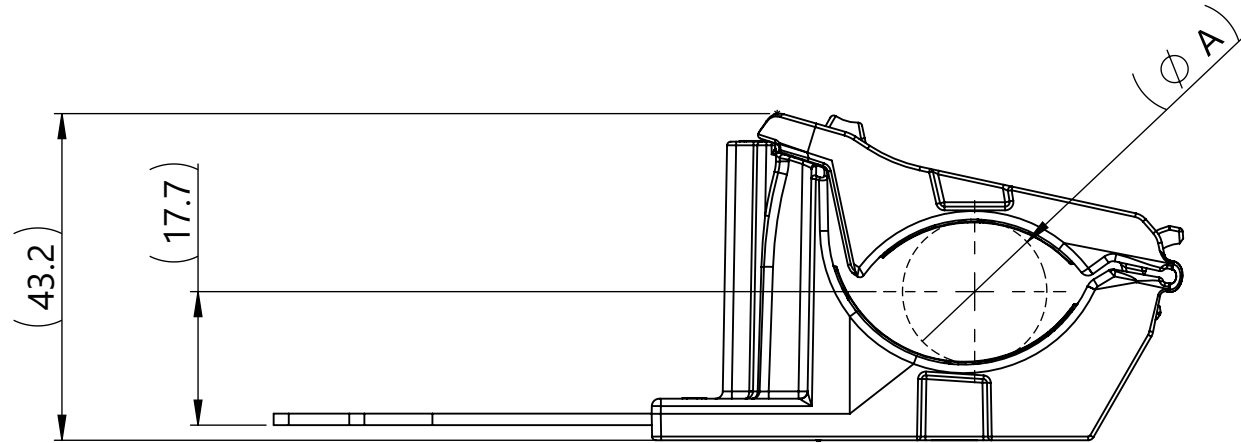

Minimum Bundle Diameter

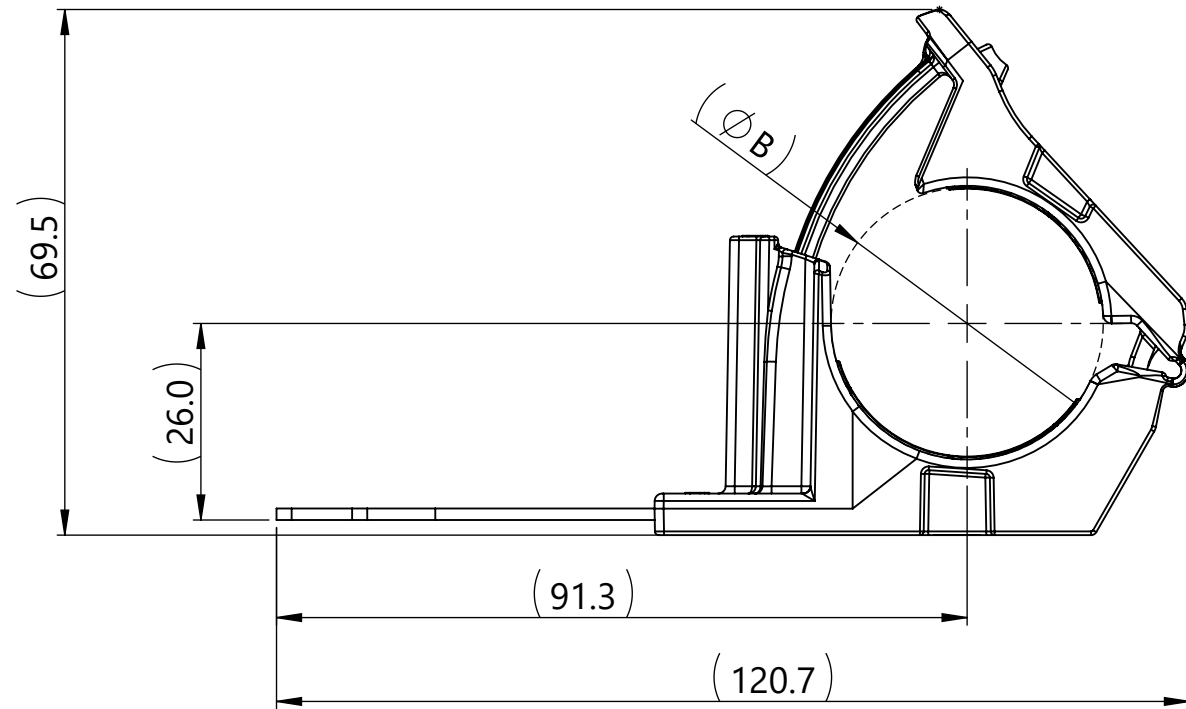


Maximum Bundle Diameter

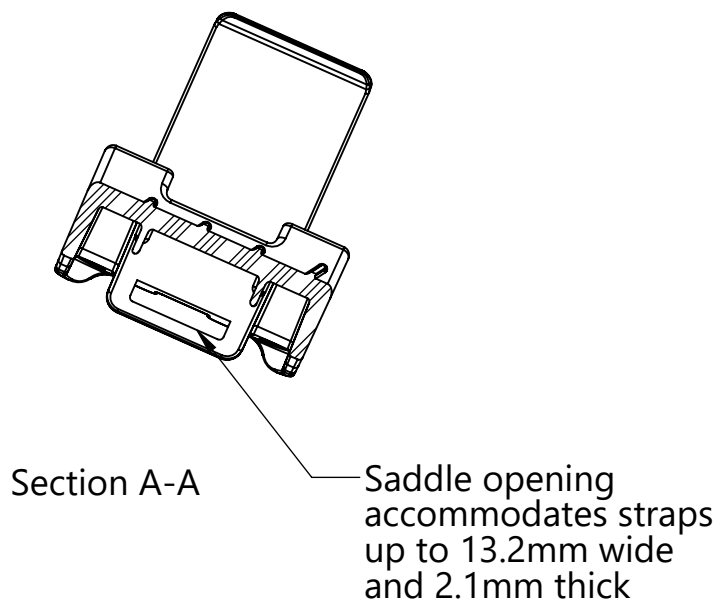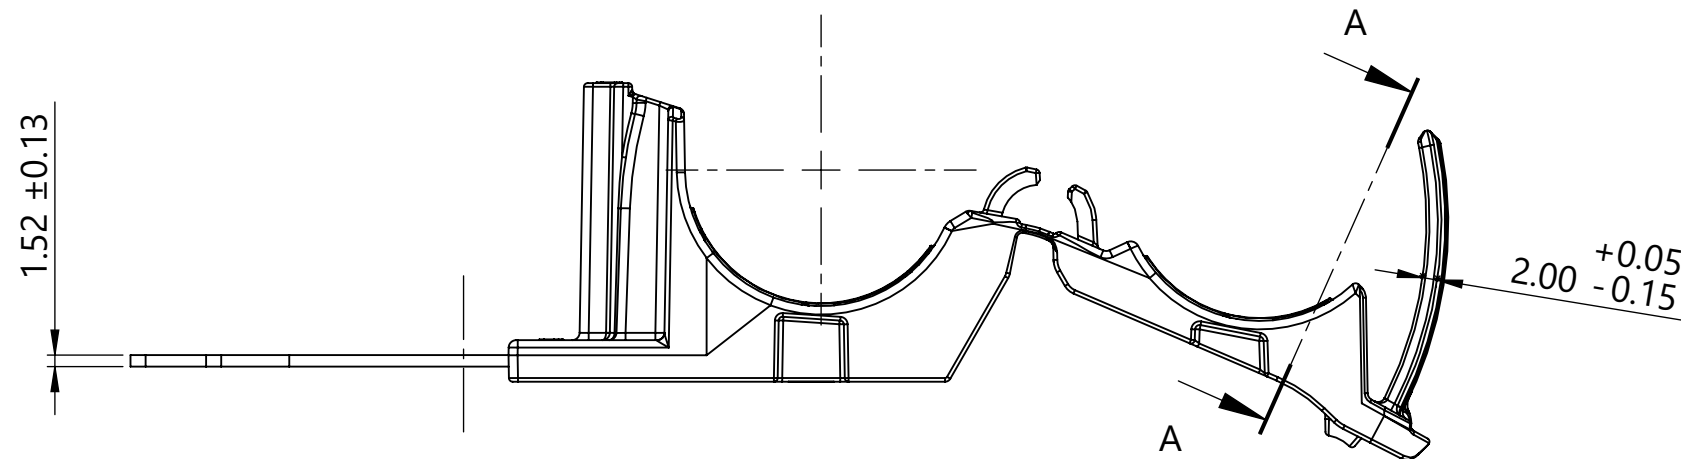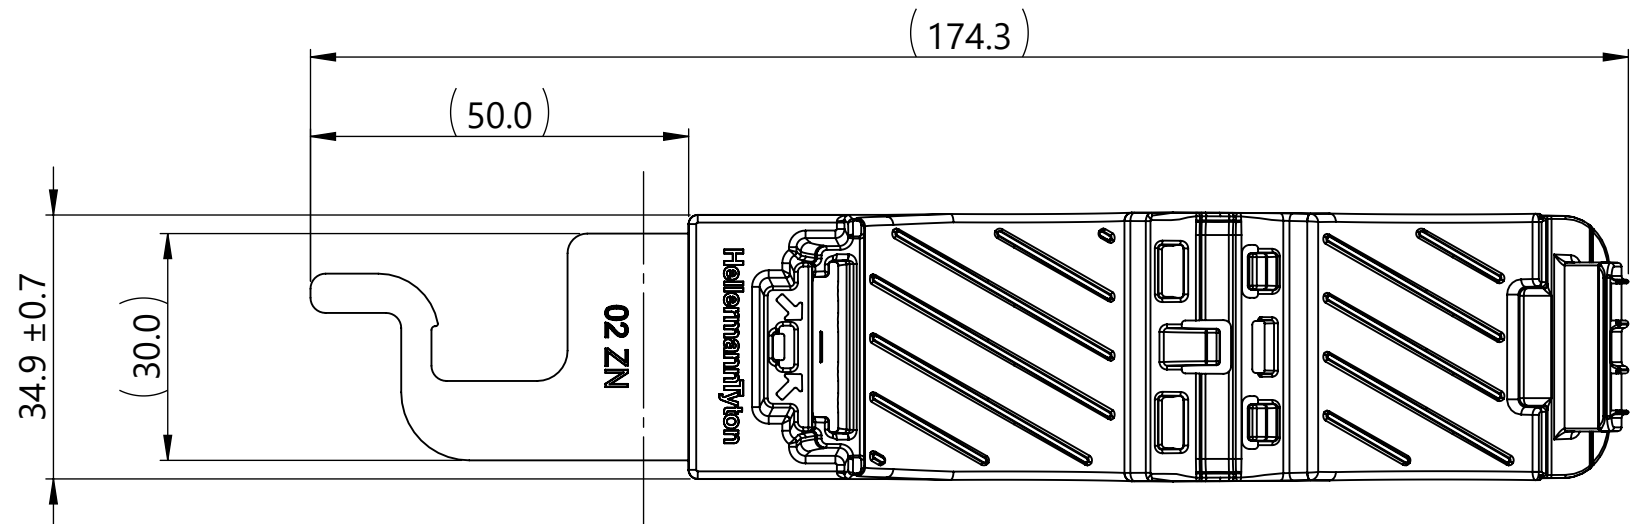

- Performance requirements:**
Dry as molded with ≤ 0.5% moisture content:
- ITS-0001 Ratchet Clamp Split Mandrel Test:
445 newtons [100 lbf] minimum at a nominal bundle diameter of 25.40 [1.000in]

- Notes:
- Material: See chart
 - Material color: See chart
 - Maximum percent regrind permissible: 25%
 - Maximum allowable flash to be: 0.25mm
 - Maximum allowable mismatch to be: 0.25mm

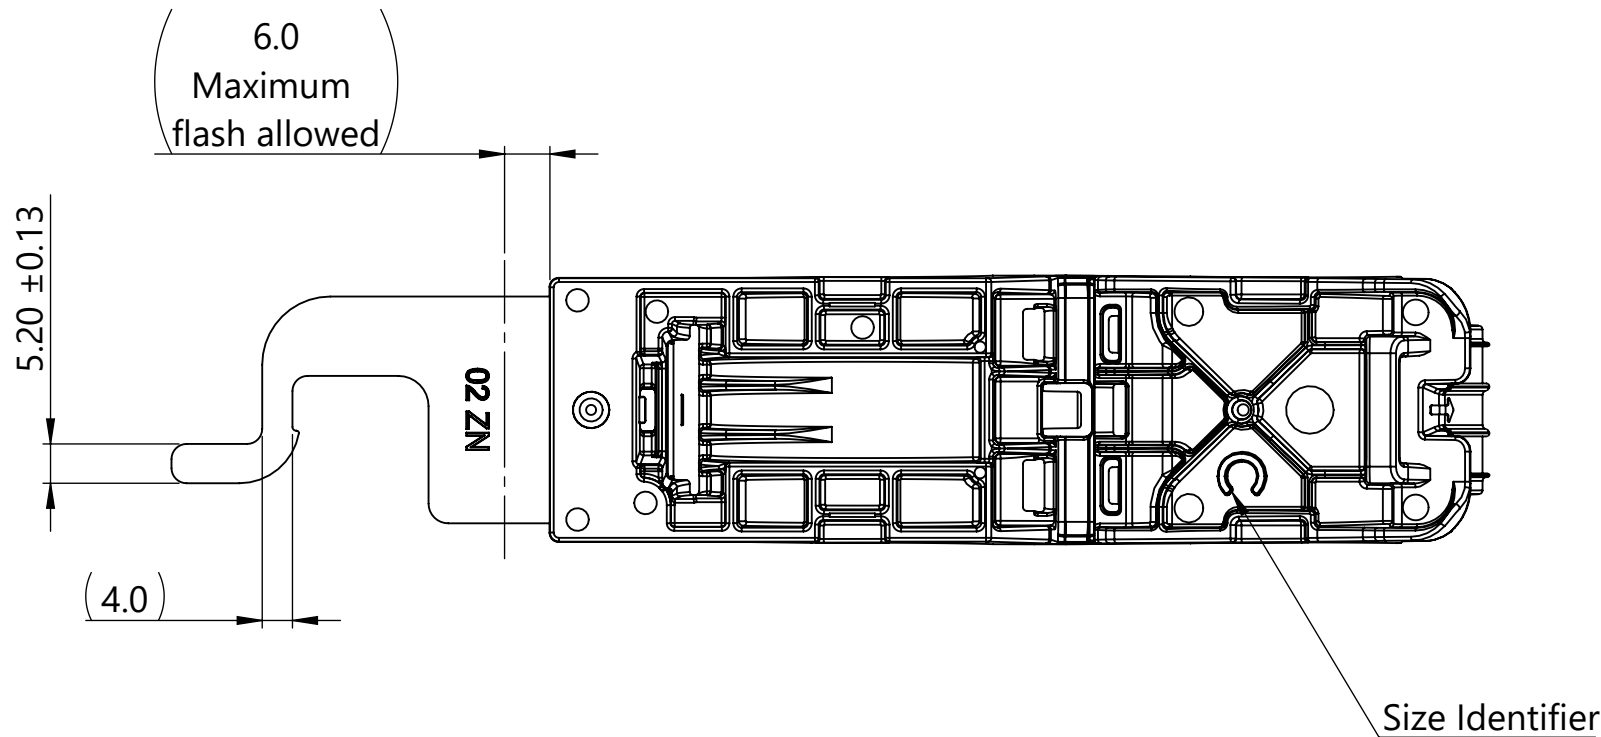

Revision level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.	Drawn		Date (YYYY/MM/DD)	Title RCC Ratchet P-Clamp, Size C, Clamp Range 19.4 to 36.0, Hanger	Scale 1:1 Global Project Number 21-0322		
Drawing	State	Part	ECN 016912					Toll	Date (YYYY/MM/DD)				
01.1	Design Release	-						Approved <th>Date (YYYY/MM/DD)</th>	Date (YYYY/MM/DD)				
Changed	Date (YYYY/MM/DD)							Vaughn <td>2021/11/10</td>	2021/11/10				
Toll			2022/03/02			All drawing revision are stored in CAD PDM database	Units mm	HellermannTyton www.HellermannTyton.com		Drawing-No 21-0322-103-CSU	Format A2 Sheet 1/1		
Approved			Date (YYYY/MM/DD)										
Vaughn			2022/03/02										