




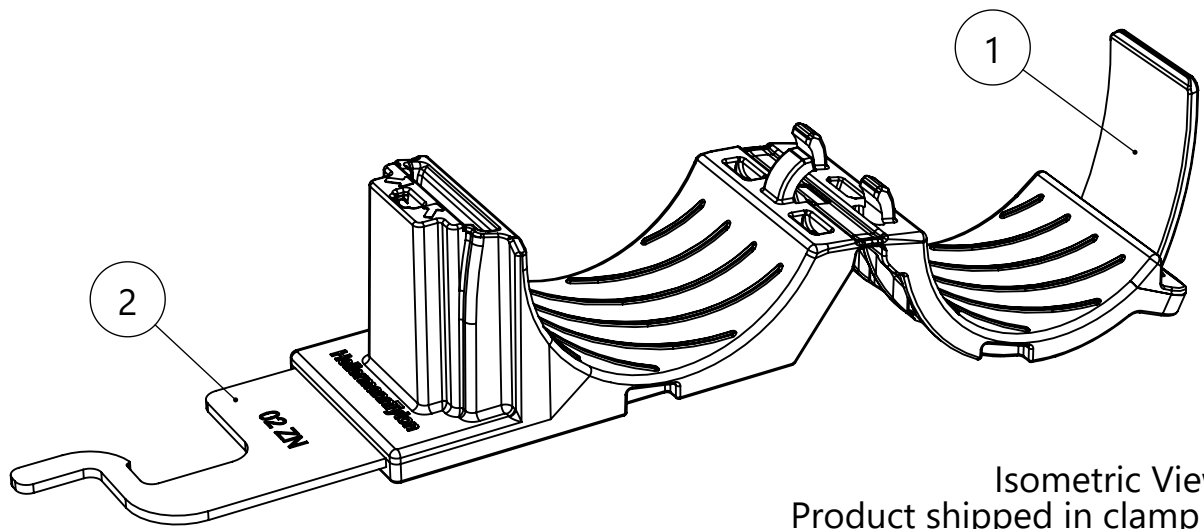




Isometric View
Product shipped in clamp open position

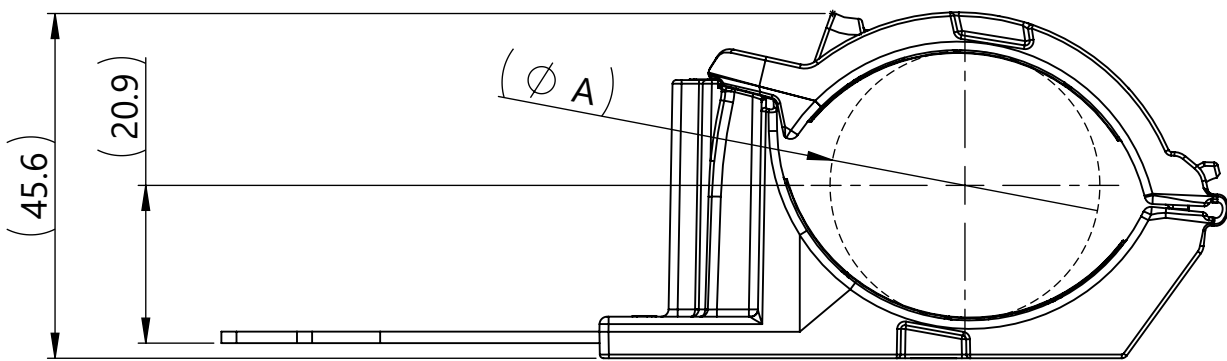

Minimum Bundle Diameter

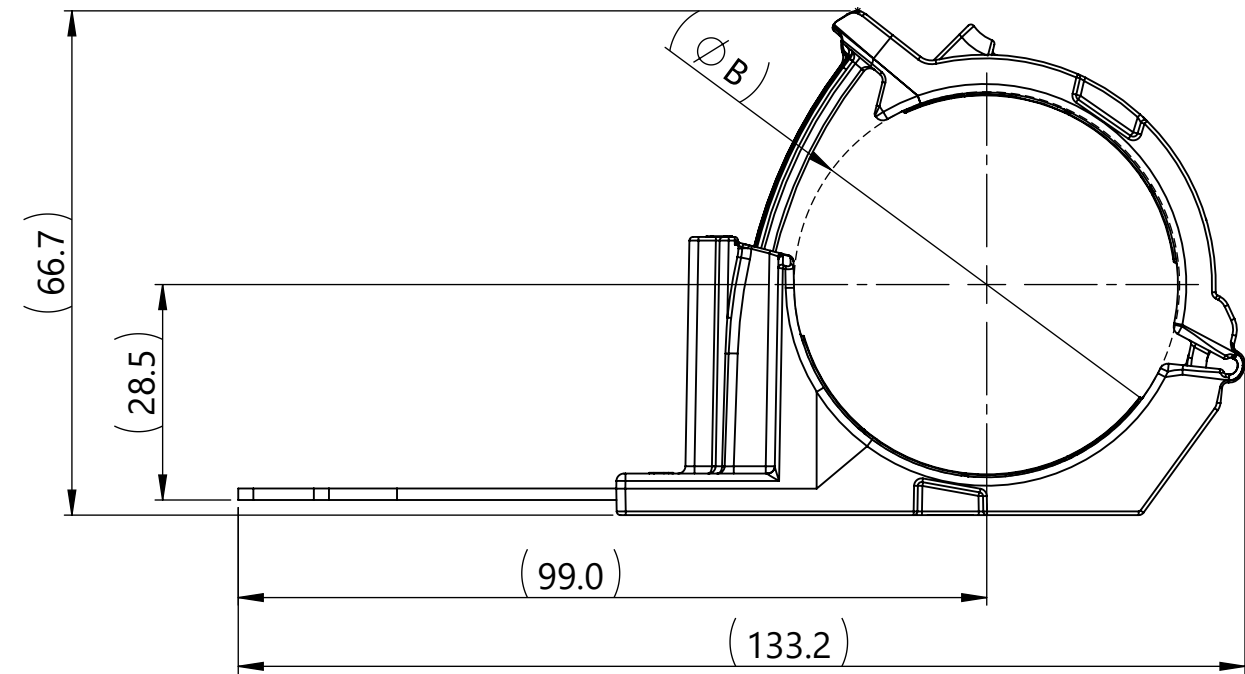


Maximum Bundle Diameter

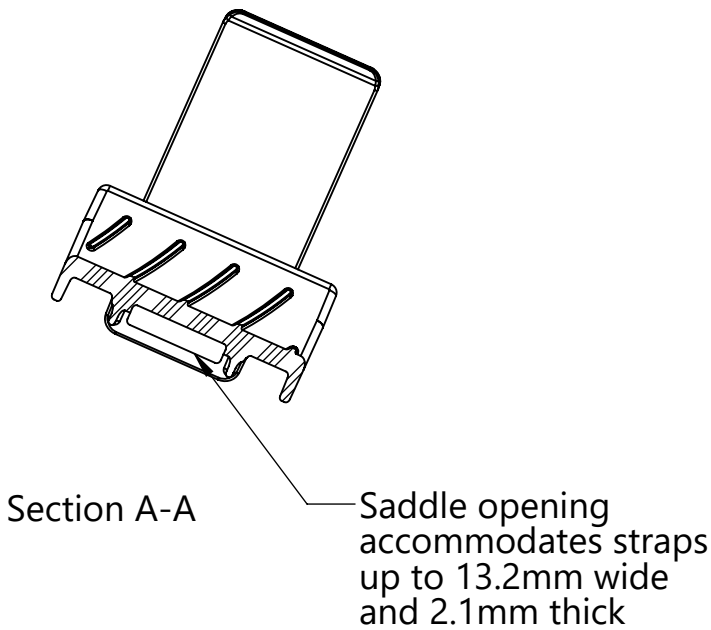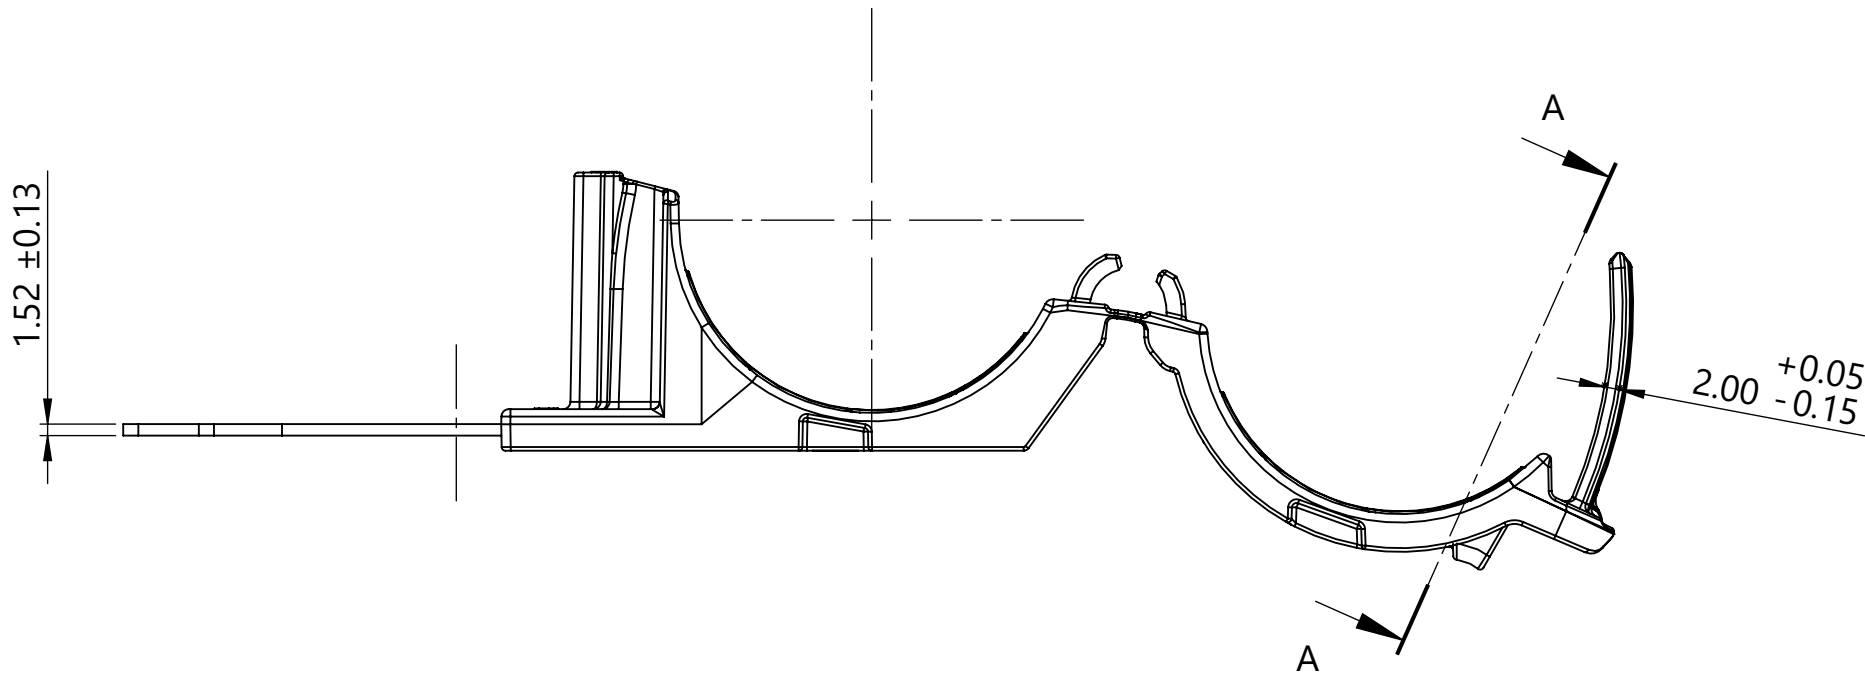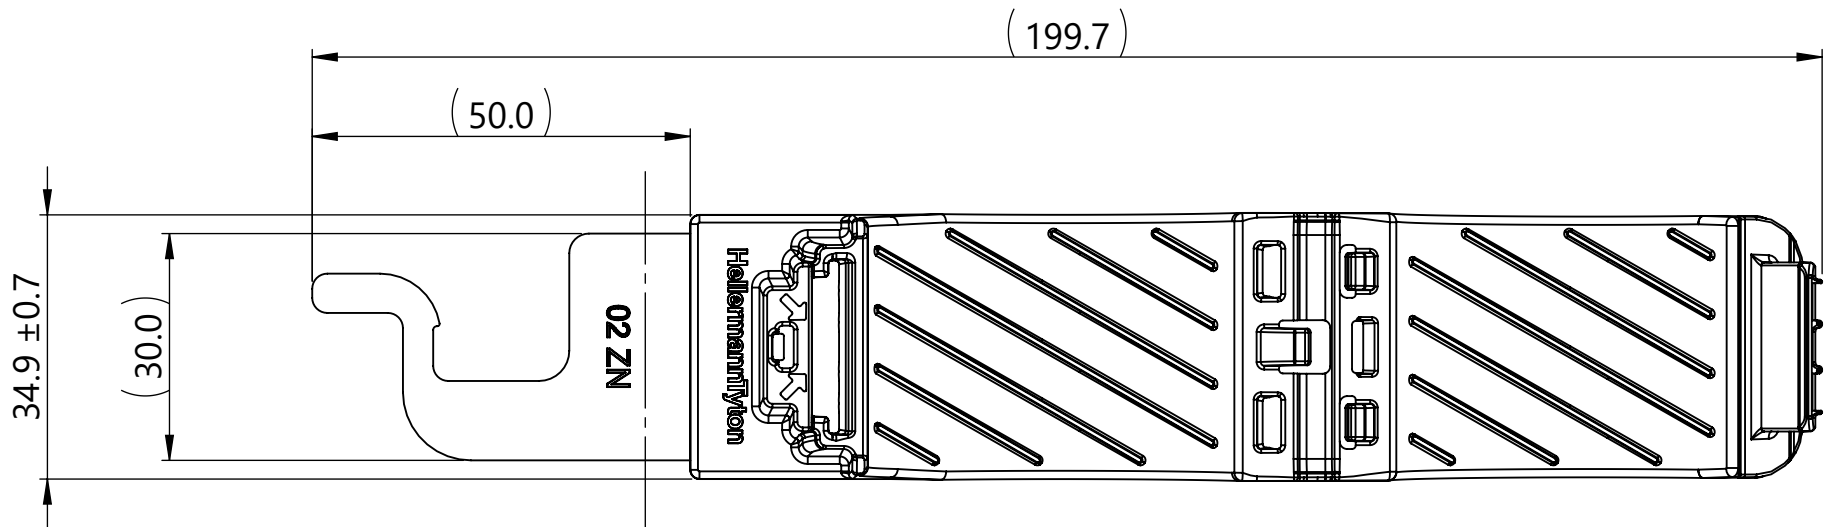

- Performance requirements:**
Dry as molded with ≤ 0.5% moisture content:
- ITS-0001 Ratchet Clamp Split Mandrel Test: 445 newtons [100 lbf] minimum at a nominal bundle diameter of 44.45mm [1.750in]

- Notes:
- Material: See chart
 - Material color: See chart
 - Maximum percent regrind permissible: 25%
 - Maximum allowable flash to be: 0.25mm
 - Maximum allowable mismatch to be: 0.25mm

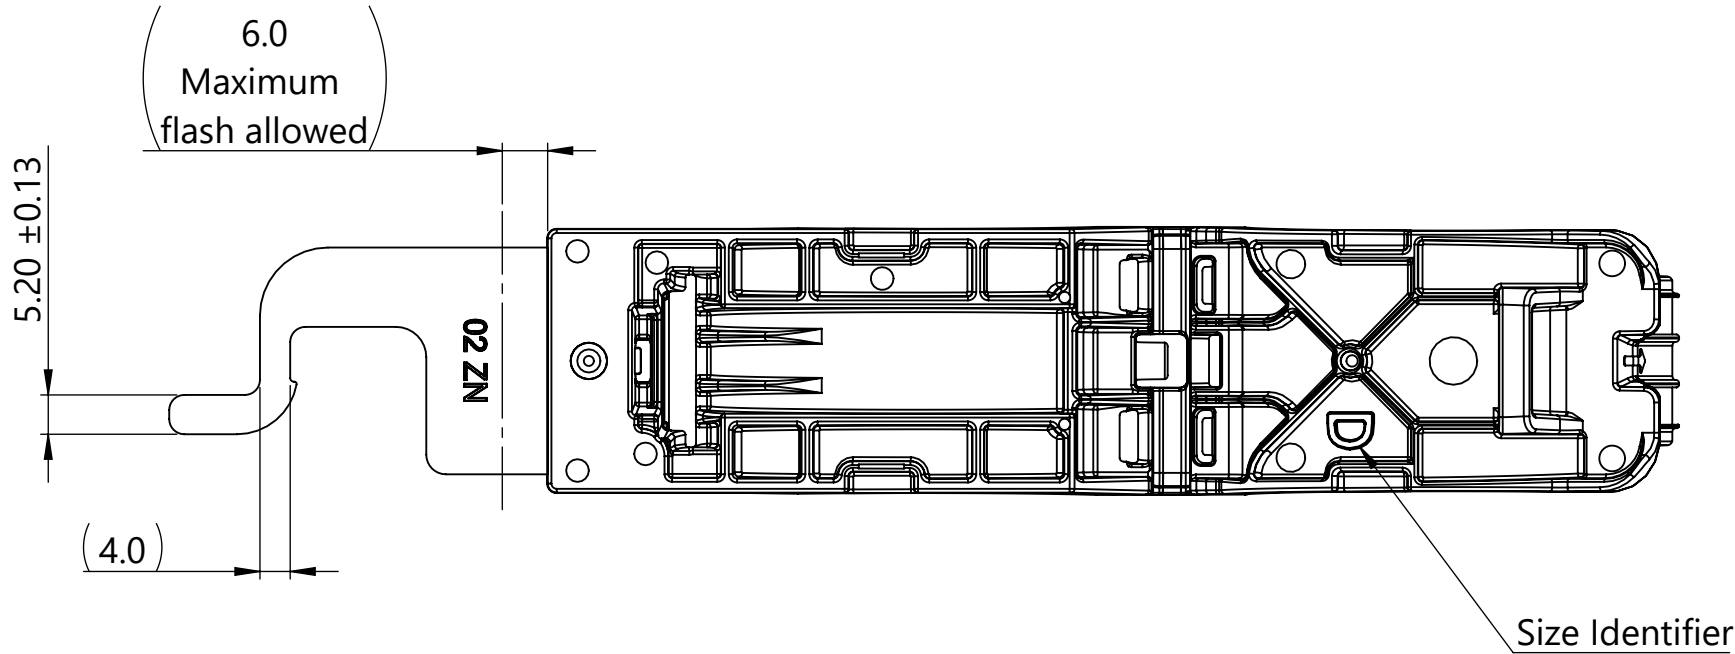


Size Identifier

Bundle Types	A Minimum Diameter (Reference)	B Maximum Diameter (Reference)
Soft	36.0	51.0
Hard	35.2	49.9

Global Part Description	Item Number	Material	Color
RCDHANGERFS-PA66HIRHSUV/ZN-BK	1	PA66HIRHSUV	Black
	2	Zinc Plated Steel	Silver

Revision level			Revision Record		The copyright of this drawing is reserved by HellermannTyton.	Drawn		Title	Scale
Drawing	State	Part	ECN	016912		Toll	Date (YYYY/MM/DD)		
01.1	Design Release	-				Approved	2021/11/10	RCD Ratchet P-Clamp, Size D, Clamp Range 36.0 to 51.0, Hanger	1:1
Changed	Date (YYYY/MM/DD)					Vaughn	2021/11/10		
Toll	2022/03/02							Drawing-No 21-0323-104-CSU	Global Project Number 21-0323
Approved	Date (YYYY/MM/DD)								Format A2
Vaughn	2022/03/02								Sheet 1/1



HellermannTyton
www.HellermannTyton.com