


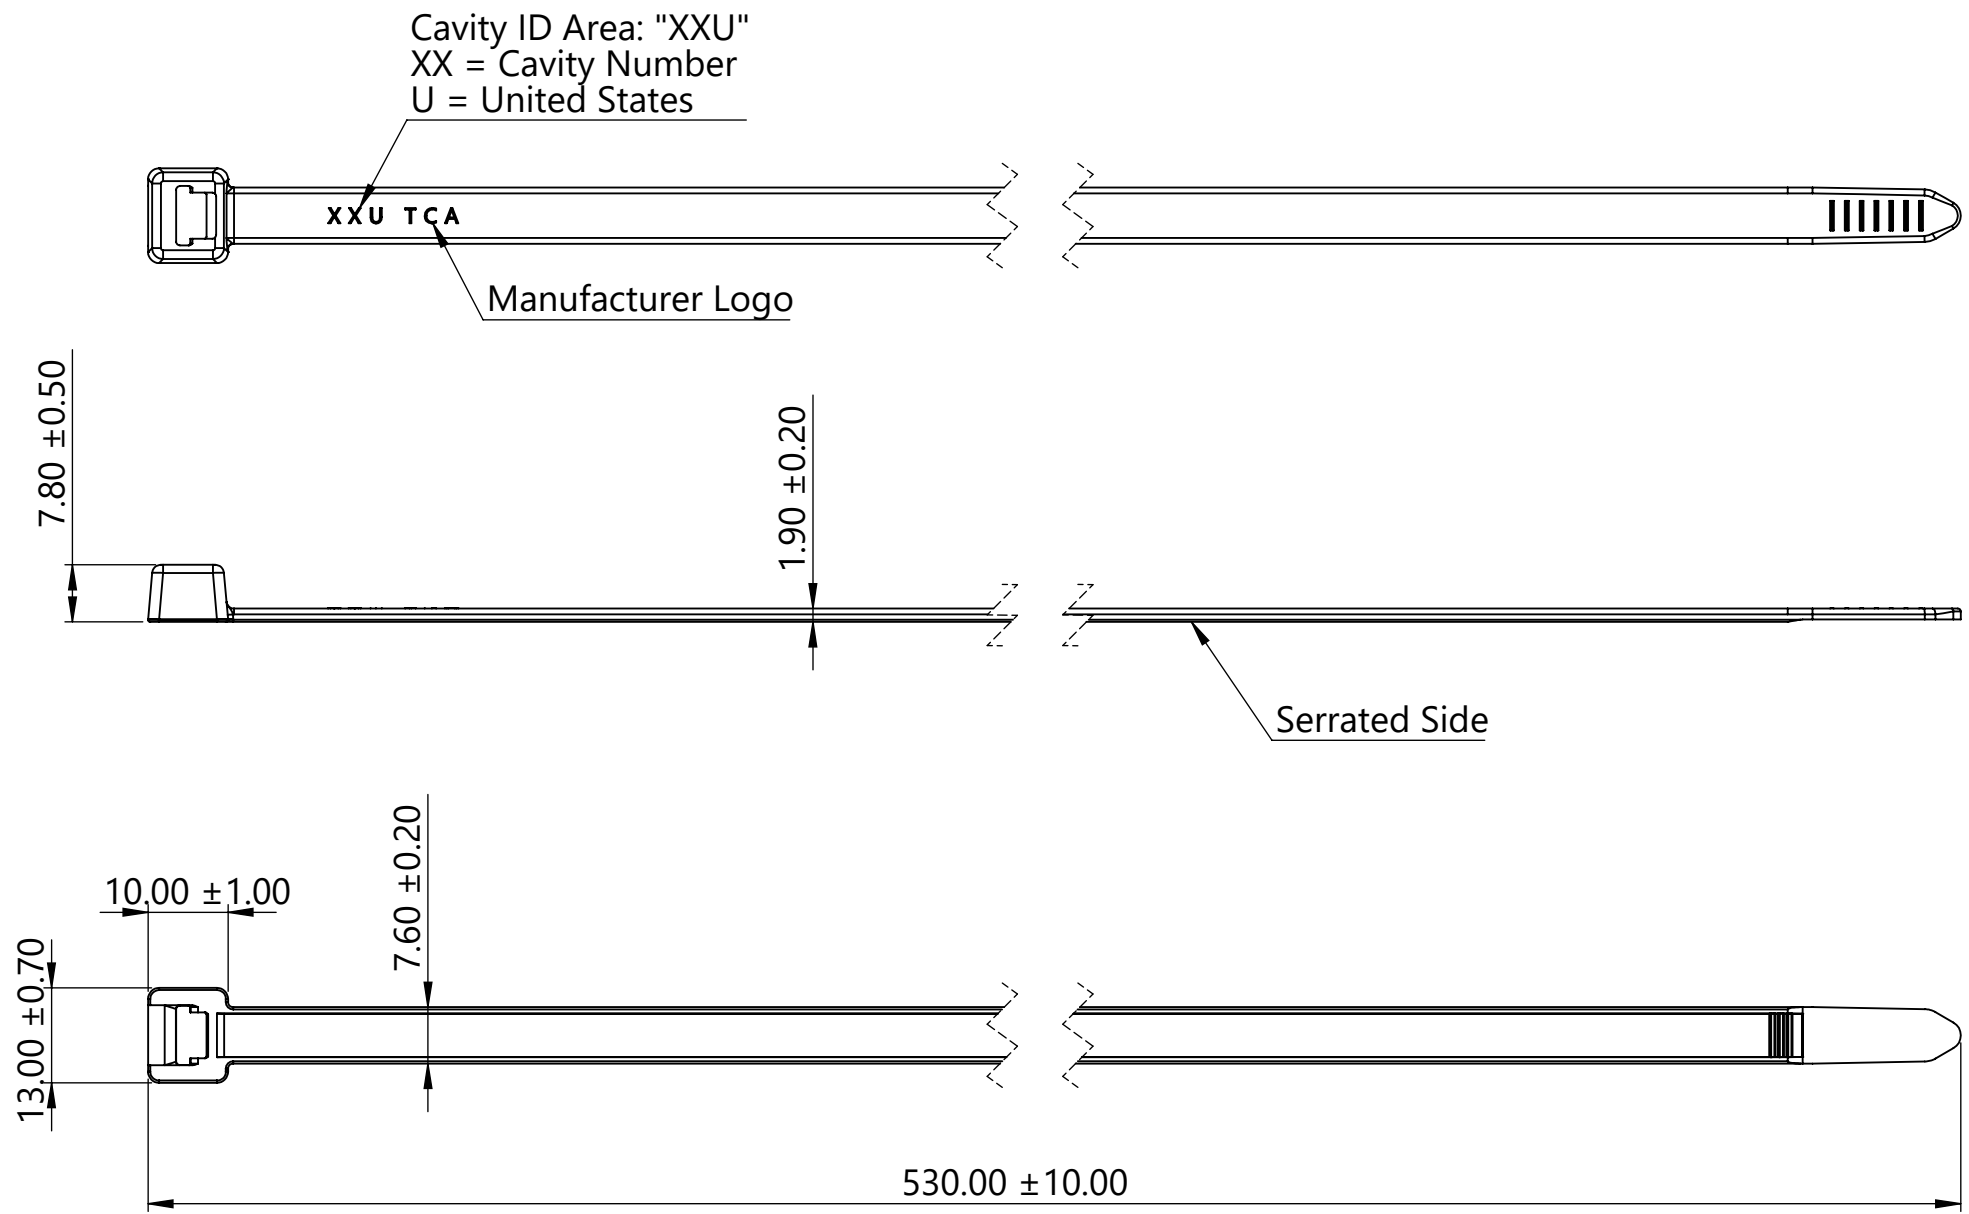

Reference:

Performance notes:

- PA66 performance requirements are validated at 50% relative humidity equilibrium ($2.5 \pm 0.25\%$ H₂O by weight)
- PA66HIRHSUV performance requirements are validated at dry as molded ($\leq 0.5\%$ H₂O by weight)

Notes:

- Material: See chart
- Material color: See chart
- Maximum in-process percent regrind permissible:
 - PA66HIRHSUV: 25%
 - PA66: TBD
- Maximum allowable flash to be: 0.5mm
- Maximum allowable mismatch to be: 0.1mm

Global Part Description	Material		Bundle Range (mm)		Minimum Loop Tensile Strength (N)
	Catalog Code	Color	Minimum	Maximum	
T120X-PA66-NA	PA66	Natural	4.8	151	535

Revision level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.		Drawn		Date (YYYY/MM/DD)					
Drawing	State		Part	ECN 017589 - Initial Release		All drawing revision are stored in CAD PDM database		Johnson		2023/05/10		Title T120X Heavy Duty Lashing Cable Tie		Scale 1:1	
00.0	Design Release		-					Approved		Date (YYYY/MM/DD)					
Changed		Date (YYYY/MM/DD)				Units mm		HellermannTyton www.HellermannTyton.com		Drawing-No 21-0324-002-CSU		Format A3			
Johnson		2023/05/10													
Approved		Date (YYYY/MM/DD)													
Uhler		2023/06/16										Sheet 1/1			