


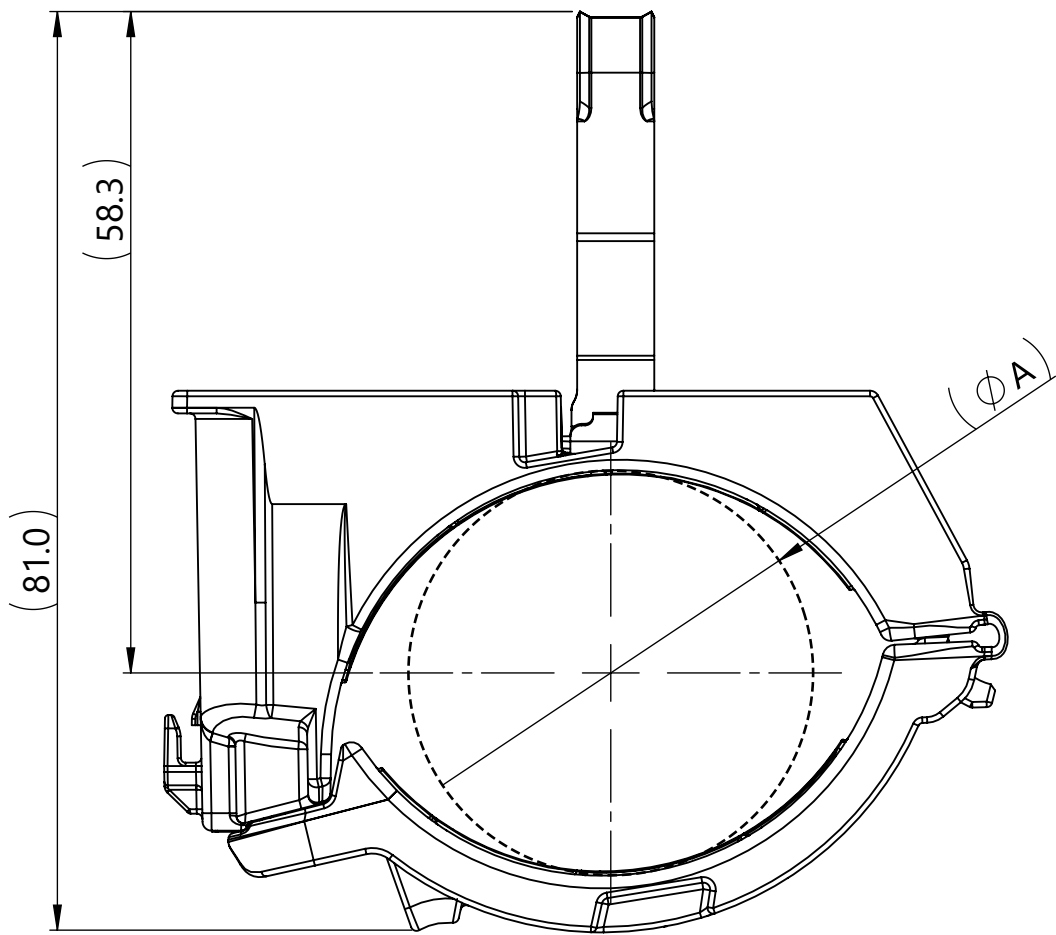
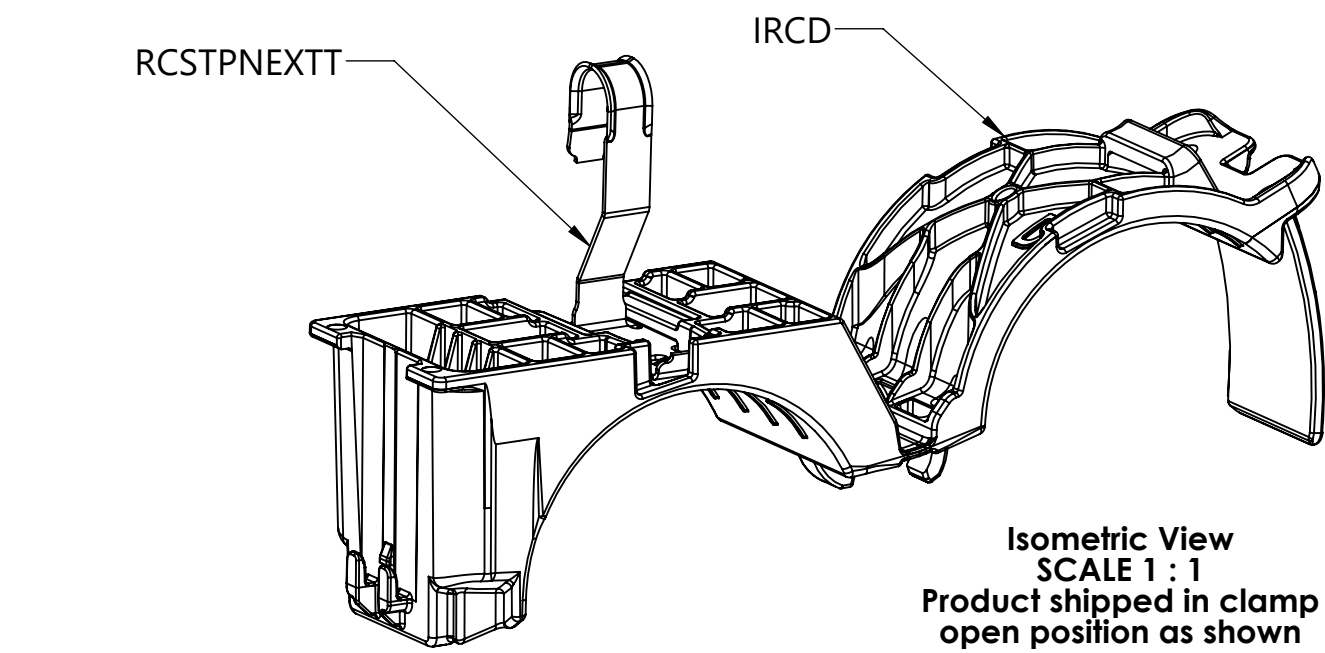
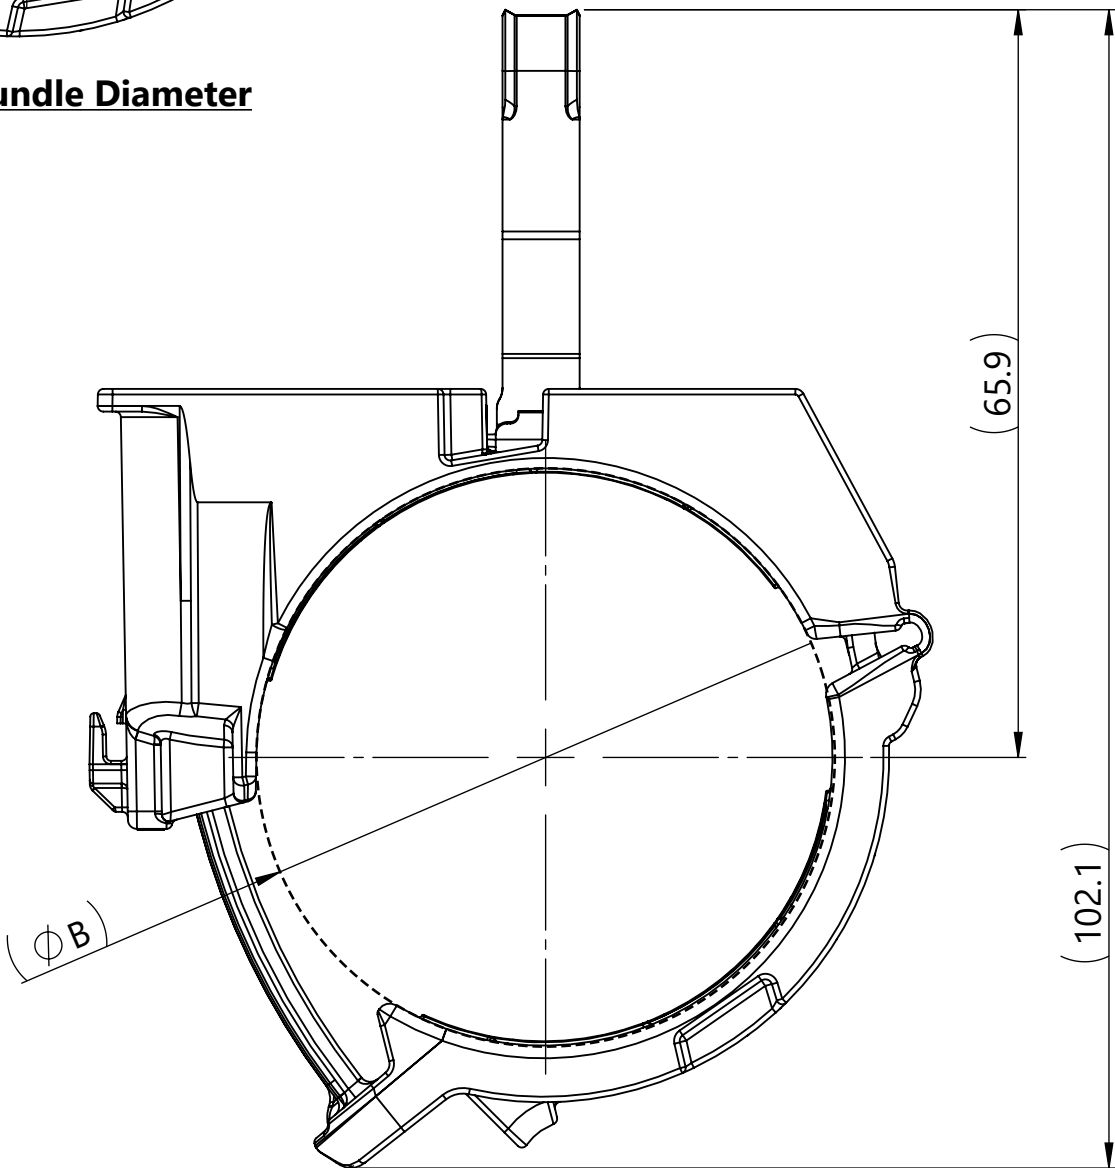
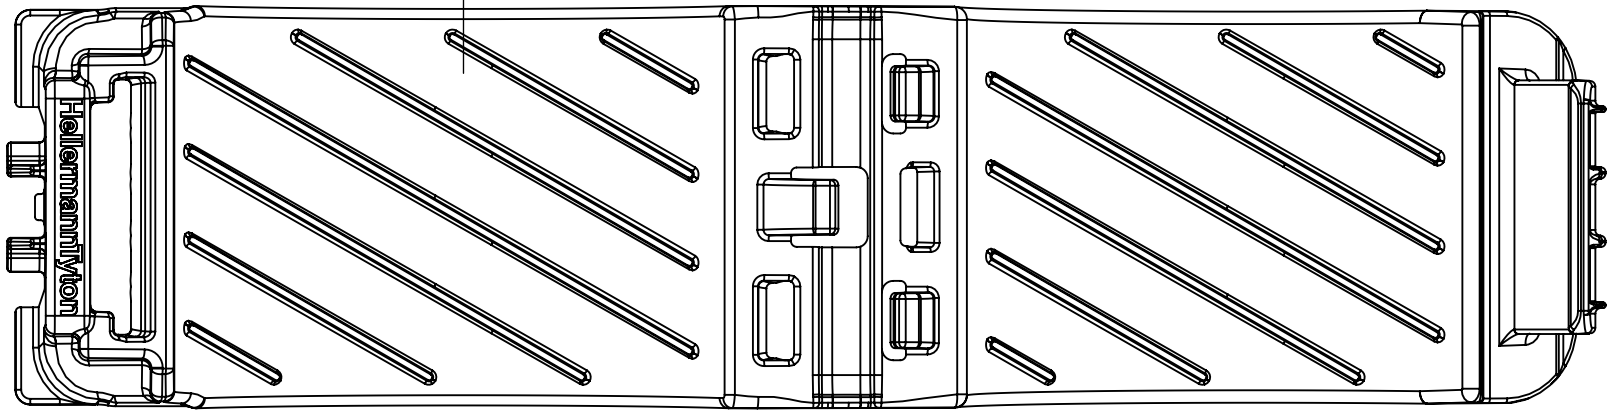


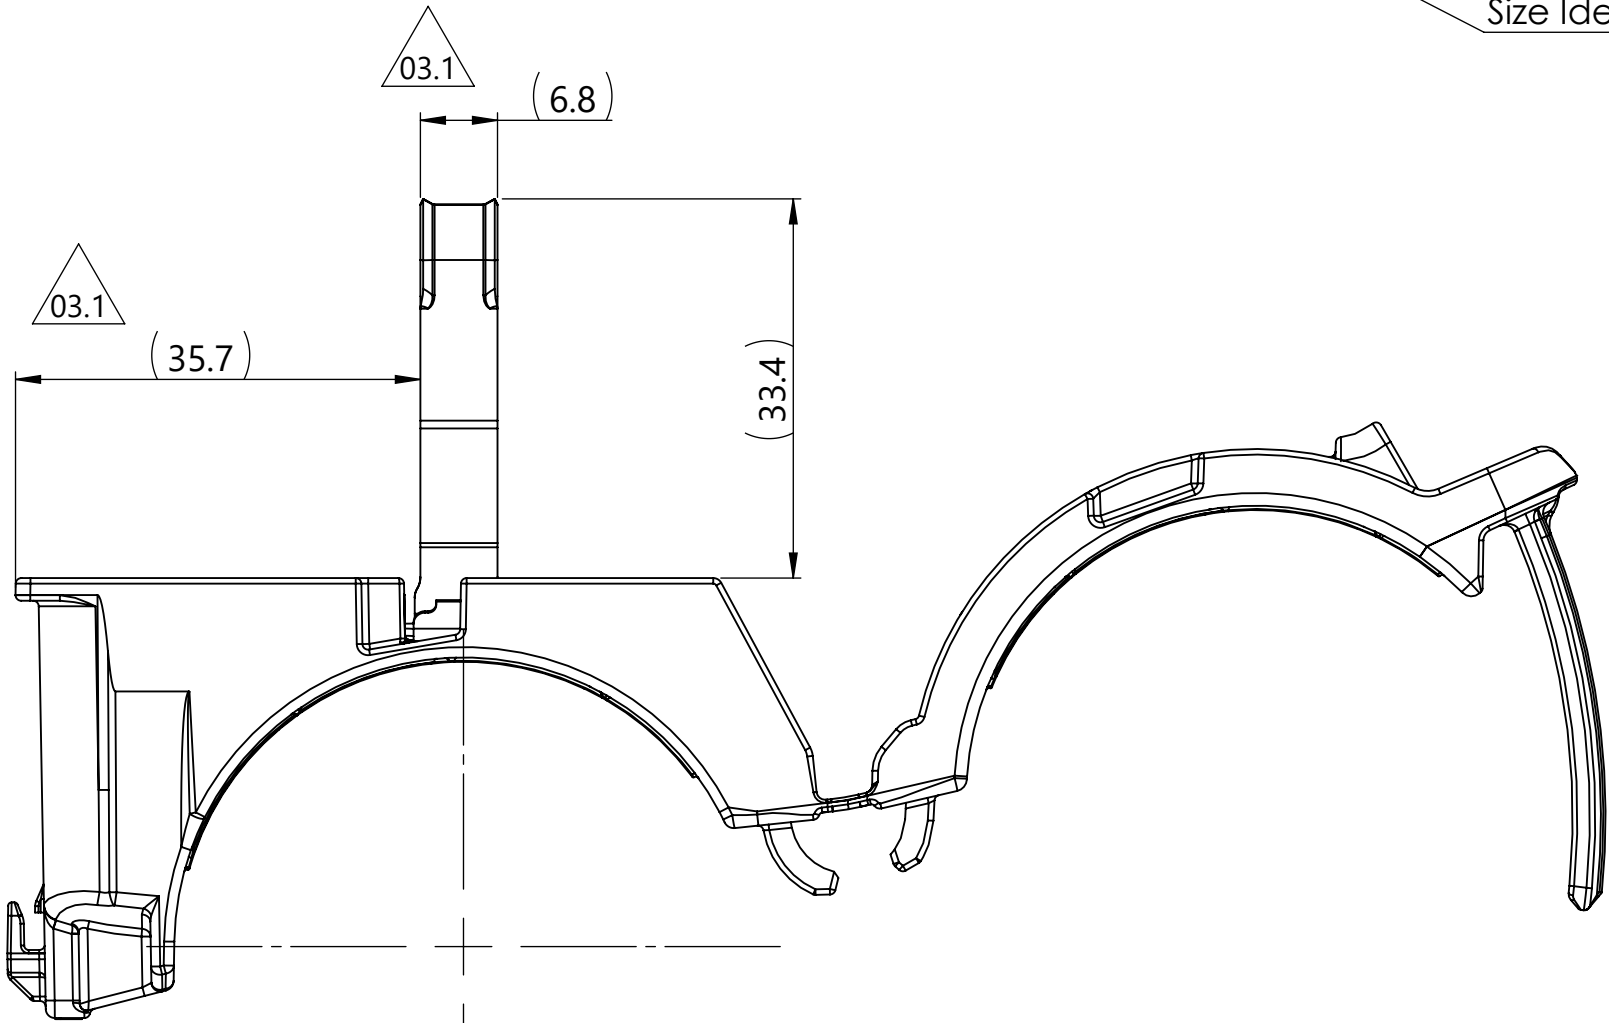

Minimum Bundle Diameter

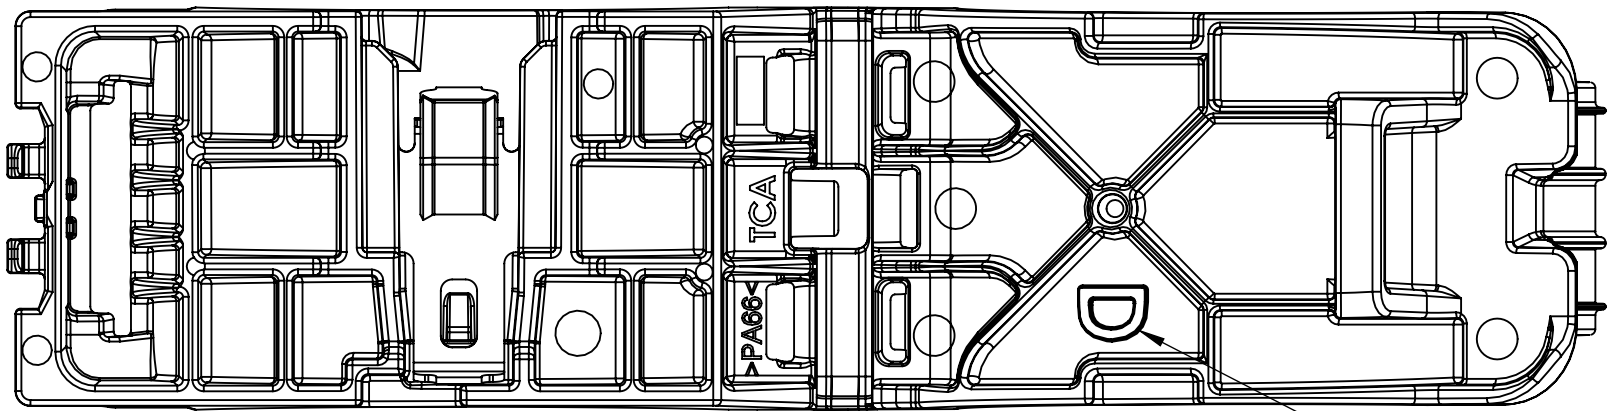

Maximum Bundle Diameter

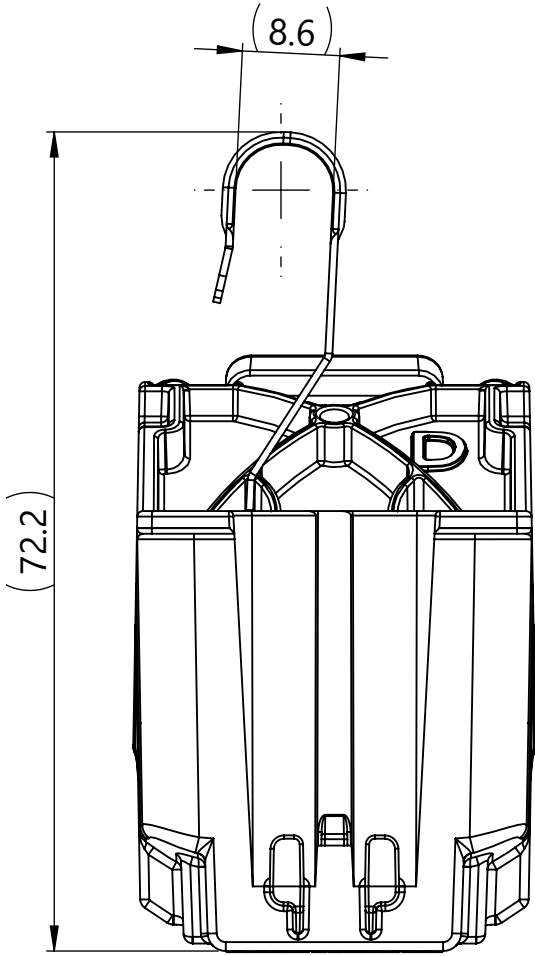

Initial Mold Validation:
Dry as molded with ≤ 0.5% moisture content:

ITS-0003 Ratchet Clamp Solid Mandrel Test:
Exceeded 89 N (20 lbf) minimum at a nominal
bundle diameter of 44.45 mm [1.750 in]

Bundle Types	A Minimum Diameter (Reference)	B Maximum Diameter (Reference)
	Soft 36.0	51.0
Hard	35.2	49.9

Global Part Description				IRCD CLAMP			RCSTPNEXTT Connector Clip				
				Drawing	Material	Color	Type Number	Material	Color		
				IRCDNEXTT-PA66HIRHSUV/SS304-BK			16-1642-004-CSU	PA66HIRHSUV	BLACK	RCSTPNEXTT	Stainless Steel
Revision level		Revision Record		 All drawing revision are stored in CAD PDM database	The copyright of this drawing is reserved by HellermannTyton.	Drawn	Date (YYYY/MM/DD)	IRCDNEXTT			
Drawing	State	Part	ECN 017065			Toll	2022/04/20				
03.1	Design Release	-				Approved	Date (YYYY/MM/DD)	Inline Ratchet P-Clamp, D-Size, M8 Solar Attachment		Scale 3:2	
Changed	Date (YYYY/MM/DD)					Vaughn	2022/04/20			Global Project Number 21-0346	
Toll	2022/07/20				Units mm	HellermannTyton www.HellermannTyton.com		Drawing-No 21-0346-104-CSU	Format A2		
Approved	Date (YYYY/MM/DD)								Sheet 1/1		
Spangler	2022/07/20										