



a: GPN17-0651
SGT100S

b: GPN21-1849
SGMFT6.7


Delivery condition/
Auslieferungszustand
1:1

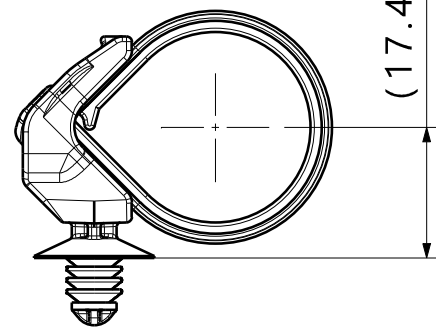


(17.4 ±2)

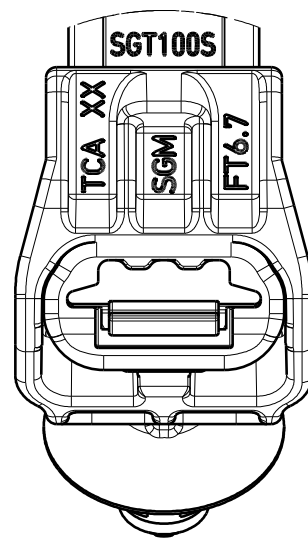

Z
2:1

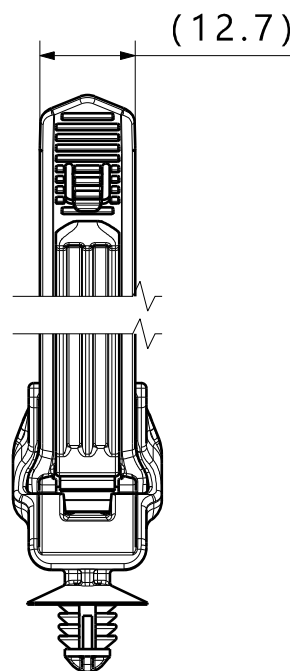


(12.7)

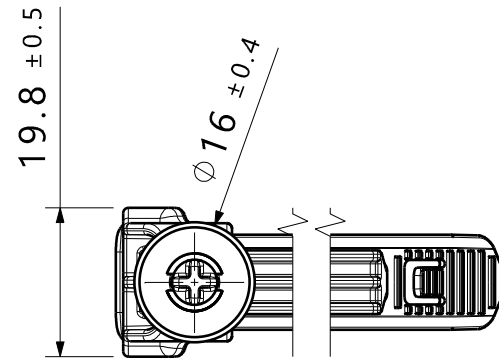

19.8 ±0.5

Ø16 ±0.4

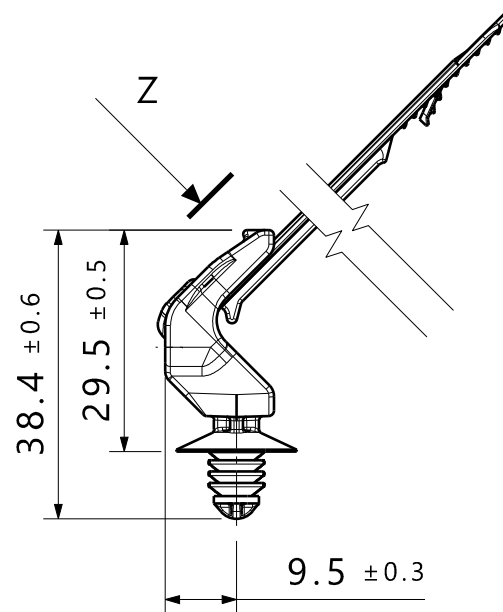

38.4 ±0.6

29.5 ±0.5

9.5 ±0.3

Printed copy for information only/
Ausdruck nur zur Information

Specification:

- Performance requirements at
equilibrium condition
standard atmosphere 23 °C / 50% RH

Spezifikation:

- Leistungsanforderung im
Gleichgewichtszustand
Normalklima 23 °C / 50% RH

Material/ Material a	Max. recommended tension setting/ max. empfohlene Abbindekraft N
PA66HS+TPE	200±20
PA66HIRHSUV+TPE	169±20

- Bundle Ø: 5.0 - 25.4 mm
- Hole size: Ø6.3 - 7.0 mm
- Panel thickness: 0.6 - 4.2 mm

- Buendel Ø: 5.0 - 25.4 mm
- Loch Ø: Ø6.3 - 7.0 mm
- Blechdicke: 0.6 - 4.2 mm

- Material: a: PA66 + TPE
b: PA66
heatstabilised,
impact modified

- Material: a: PA66 + TPE
b: PA66
hitze stabilisiert,
schlagzähmodifiziert

The manufacturing-related geometry
changes (injection point,
ejectors marks, etc.) allowed.
Design of the details are left to
suppliers discretion.

Durch das Herstellverfahren bedingte
Geometrieänderungen (Anspritzung,
Auswerfermarkierungen, etc.) zulaessig.
Einzelheiten der Ausfuehrung bleiben
dem Hersteller ueberlassen.

Assembly example for reference only/
Montagebeispiel dient nur als Referenz
1:1

Revision Level		
Drawing	State	Part
00.5	Design Release	
Changed	Date (YYYY/MM/DD)	
Approved	Date (YYYY/MM/DD)	

Revision Record	

All drawing revisions are stored in CAD PDM database

The copyright of this drawing is reserved by HellermannTyton.
Units mm

Drawn	Date (YYYY/MM/DD)
Matz	2024/02/06
Approved	Date (YYYY/MM/DD)
Schiwek	2024/02/06

Title		Scale	1:1
SGT100SFT6.7		Global Project Number	
		21-1850	
Drawing-No		Format	A3
21-1850-001-CSG		Sheet	1 / 1