

12 11 10 9 8 7 6 5 4 3 2 1

I

H

G

F


E

D


C

B

A

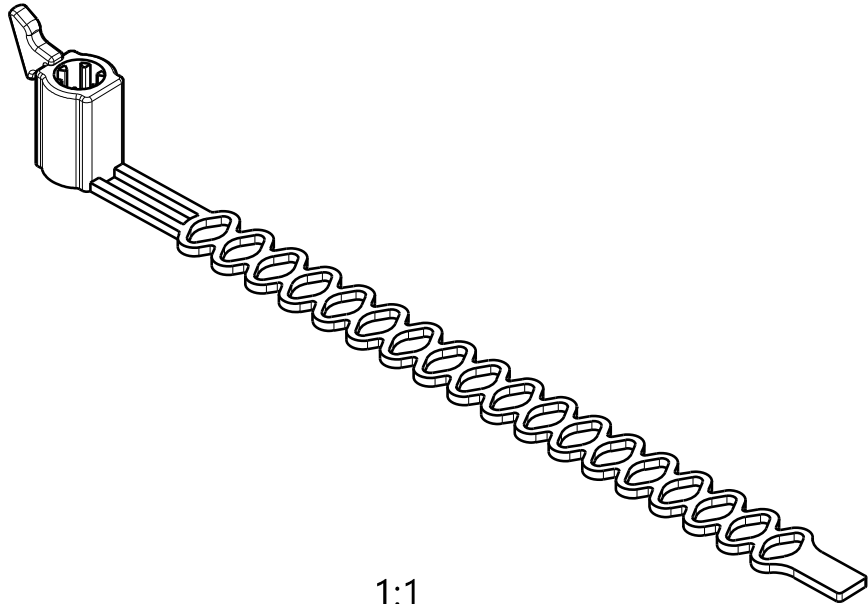

1:1

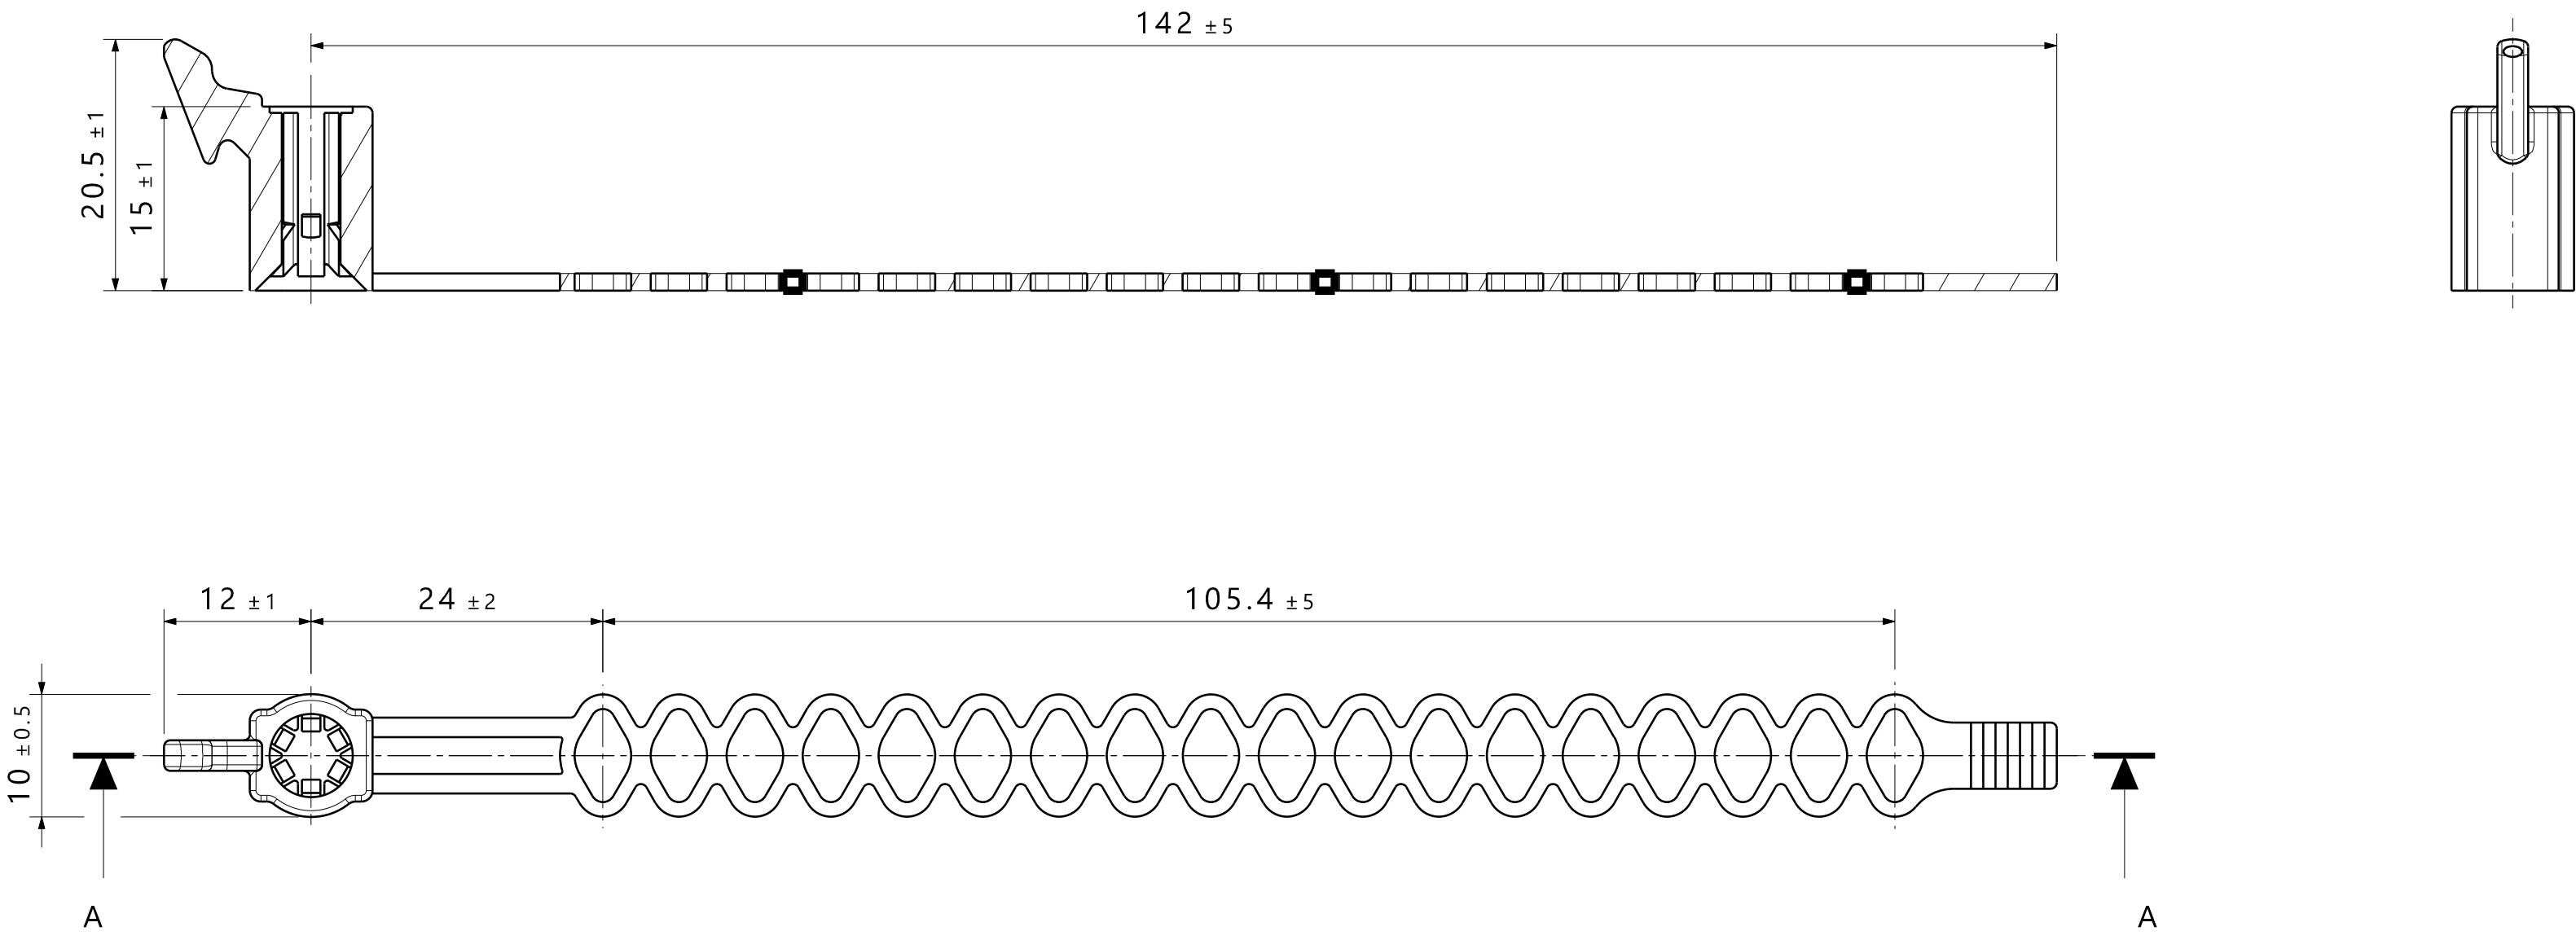

Printed copy for information only/
Ausdruck nur zur Information

Specification:		Spezifikation:	
- Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH		- Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH	
- Bundle Ø:	6 - 38mm	- Buendel Ø:	6 - 38mm
- Tensile force:	min. 150N	- Schlaufenhaltekraft:	min. 150N
- Push on force:	max. 50N	- Aufdrückkraft:	max. 50N
- Material:	PA6.6	- Material:	PA6.6
- Material color:	black	- Material Farbe:	schwarz
- Welded screw Ø:	M5; T5	- Schweißbolzen Ø:	M5; T5
max. length:	14mm	max. Laenge:	14mm
The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.		Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.	

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.	Drawn		Title	Scale		
Drawing	State	Part	- Drawing frame changed, drawing no changed, old no.: 14.1121 - Dimension 9mm threading aid removed - Specification: Performance Text block added - M5, T5 and max. length: 14mm added				Schmidt	Date (YYYY/MM/DD) 1992/01/28				
00.2	Design Release						Approved	Date (YYYY/MM/DD) 1992/01/28				
Changed	Date (YYYY/MM/DD)						Matschiner					
S.Wulf	2023/04/12		All drawing revisions are stored in CAD PDM database			Units mm	 www.HellermannTyton.com		Drawing-No 21-2021-001-CSG	Format A2		
Approved	Date (YYYY/MM/DD)											
C.Cordts	2023/04/12											
21-2021-001-CSG										Sheet 1 / 1		

12 11 10 9 8 7 6 5 4 3 2 1