


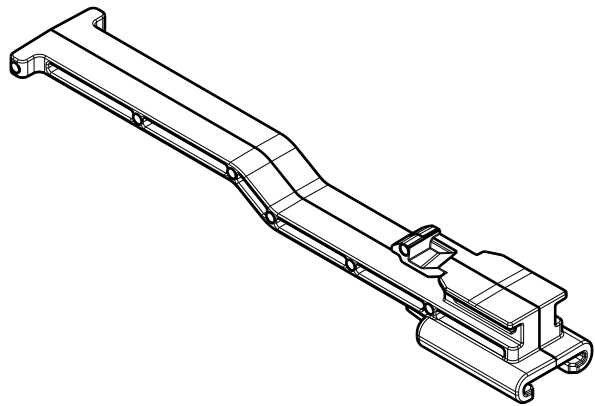





Isometric view



"TCA" to be located on this surface

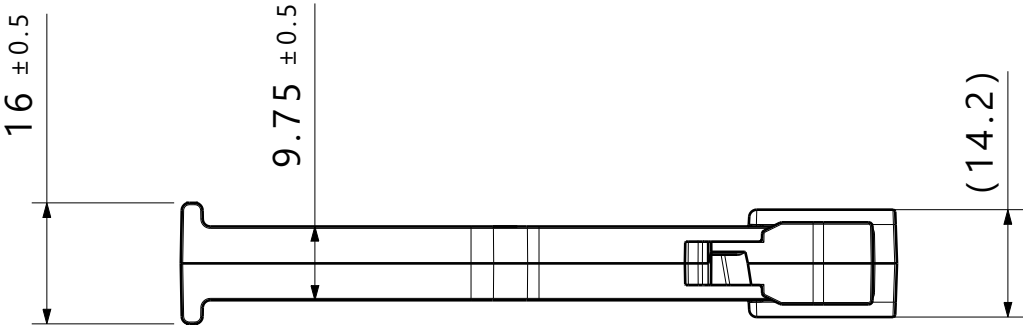

Cavity ID and country of origin to be located on this surface



Reference:
Performance requirements at dry as molded:
1. Designed to meet push on/pull off forces of SAE/USCAR-2.


- Notes:
- 1. Material: See chart
 - 2. Material color: See chart
 - 3. Maximum percent regrind permissible: 25%
 - 4. Max allowable flash to be: 0.5mm
 - 5. Max allowable mismatch to be: 0.1mm
 - 6. Fits into USCAR clip slot specification EWCAP-005-11.



Global Part Description	Material	Color
TSRCC11A-PA66HIRHSUV-BK	PA66HIRHSUV	Black

Revision Level		
Drawing	State	Part
02.1	Design Release	-
Changed	Date (YYYY/MM/DD)	
Russell	2024/06/21	
Approved	Date (YYYY/MM/DD)	
Cottril	2024/06/21	

Revision Record		
ECN 311272		



The copyright of this drawing is reserved by HellermannTyton.

Drawn	Date (YYYY/MM/DD)
Cottrill	2021/12/17
Approved	Date (YYYY/MM/DD)
Karabon	2021/12/17

Title		Scale	1:1
Offset tape bar with 11mm connector clip		Global Project Number	
Drawing-No		Format	
21-3341-001-CSU		Sheet	
		1 / 1	