


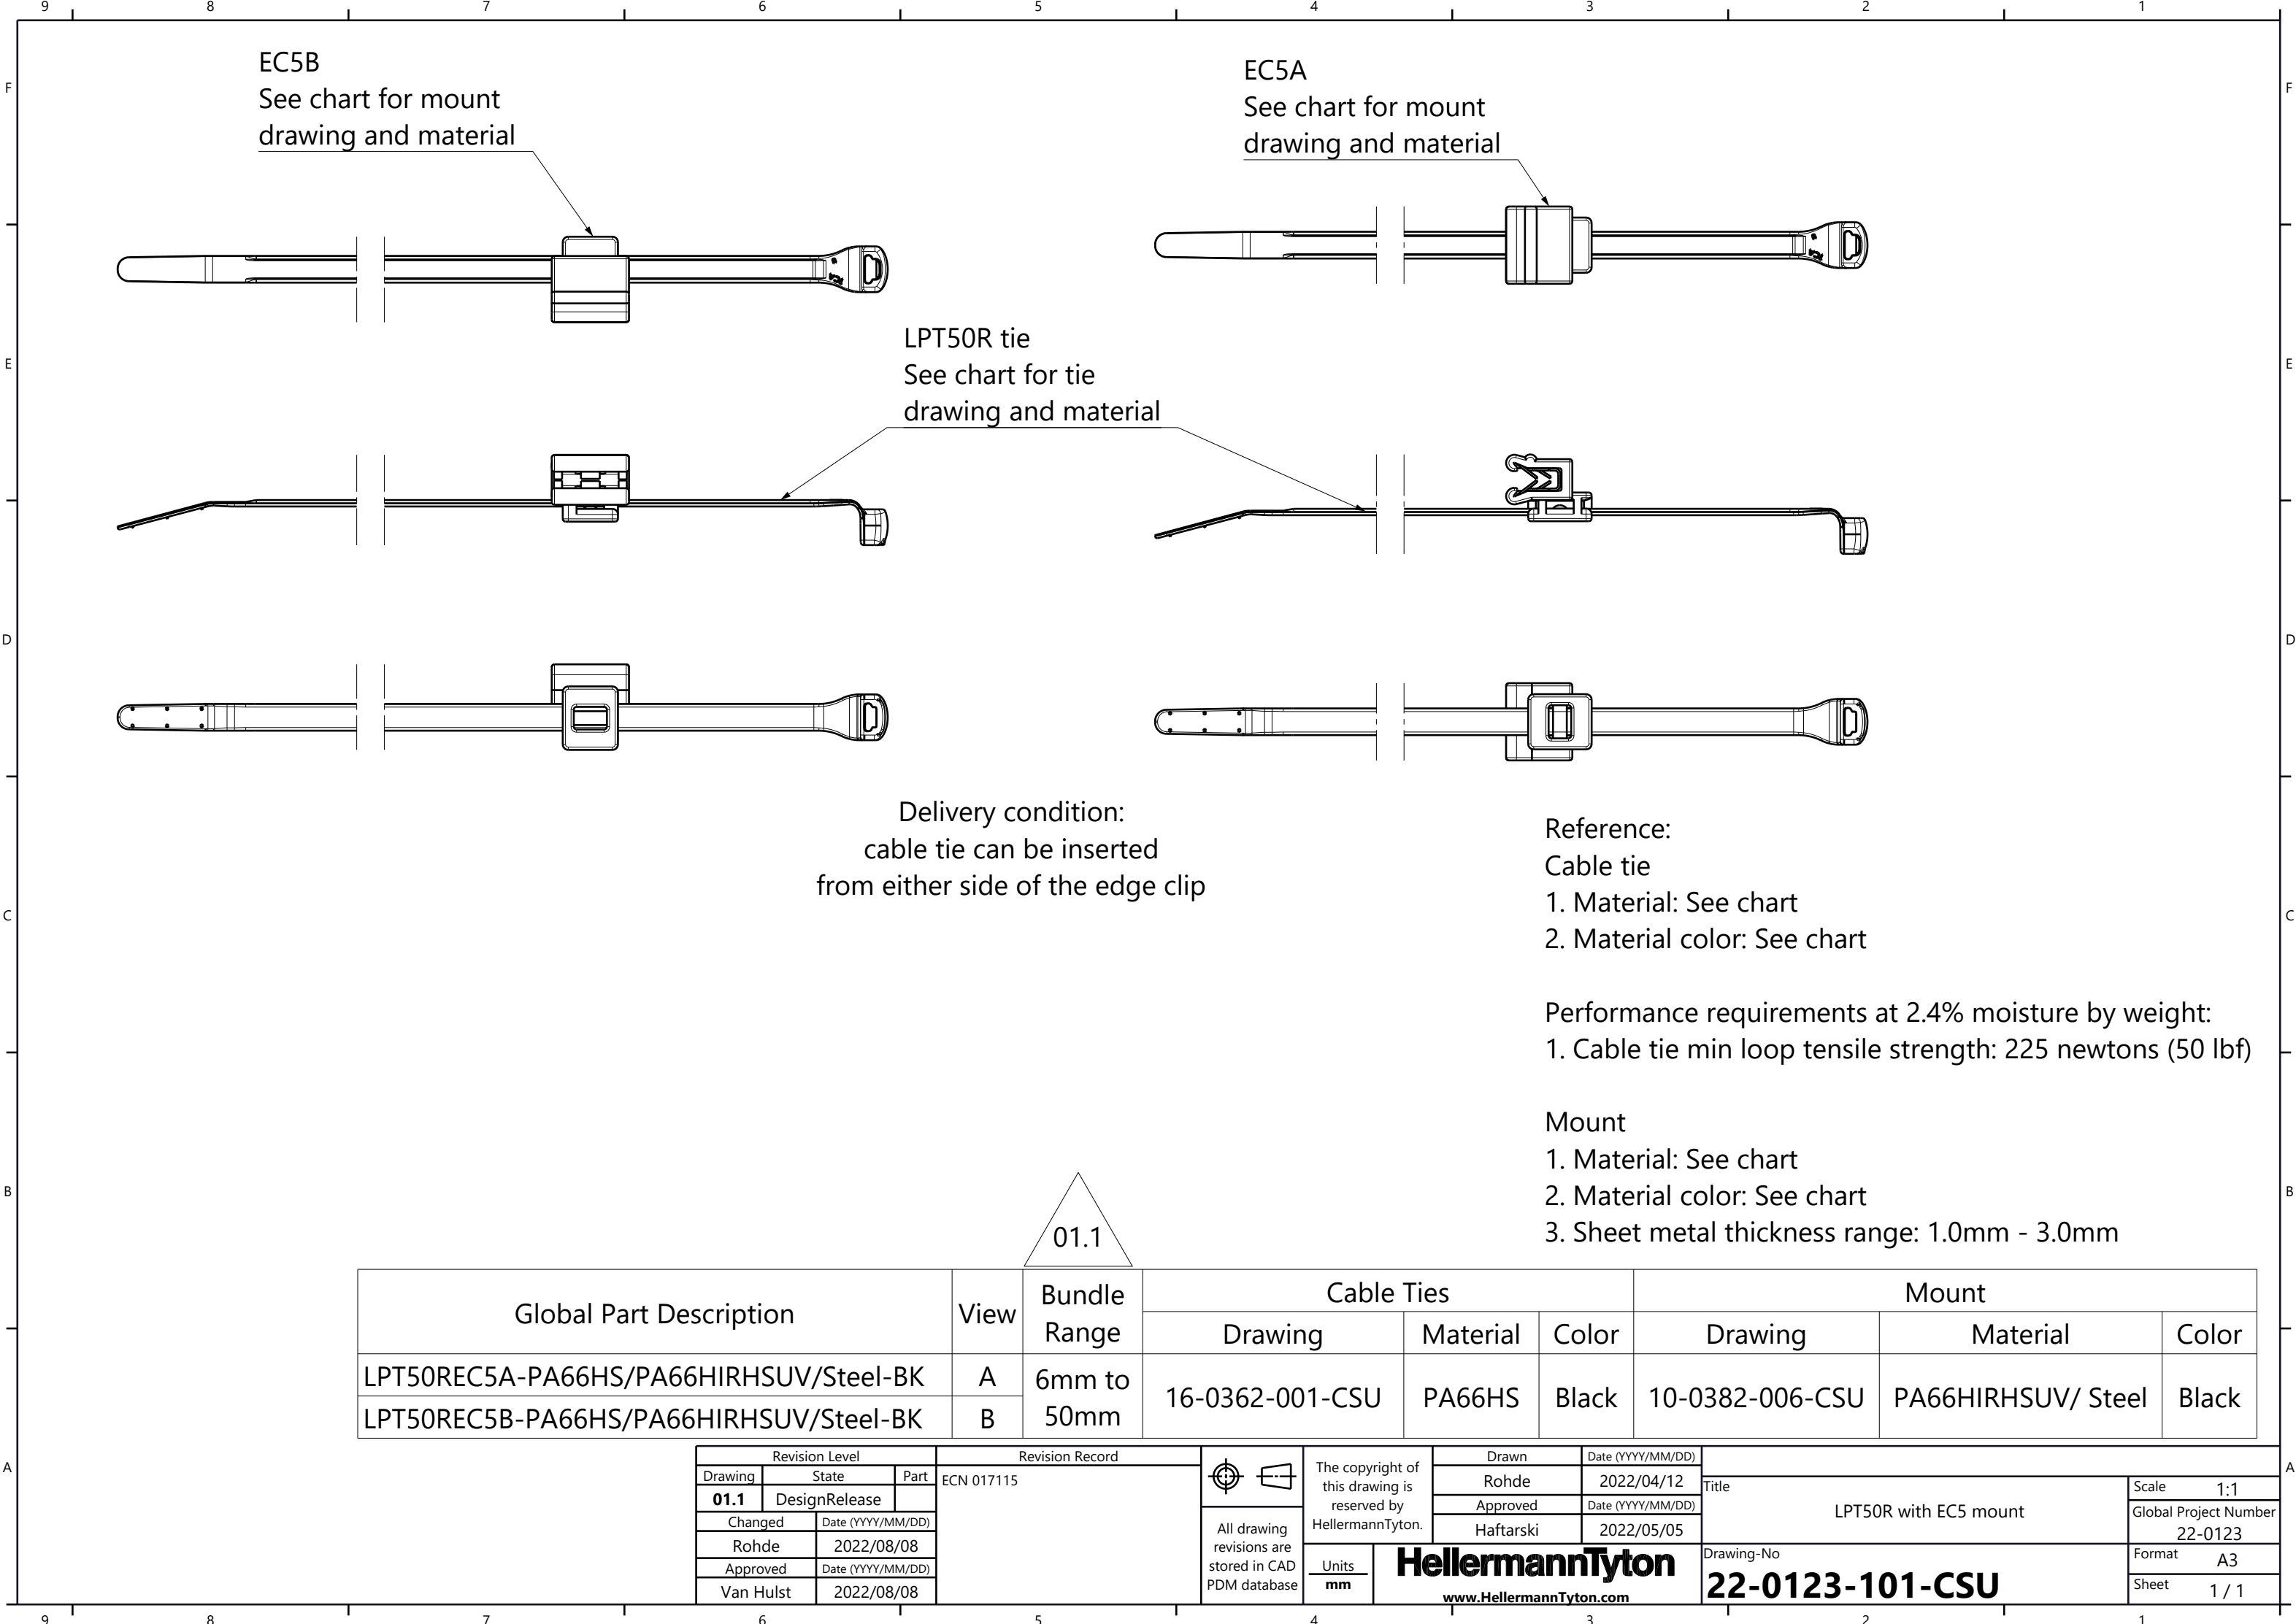

EC5B
See chart for mount
drawing and material

EC5A
See chart for mount
drawing and material

LPT50R tie
See chart for tie
drawing and material

Delivery condition:
cable tie can be inserted
from either side of the edge clip

Reference:
Cable tie
1. Material: See chart
2. Material color: See chart

Performance requirements at 2.4% moisture by weight:
1. Cable tie min loop tensile strength: 225 newtons (50 lbf)

Mount
1. Material: See chart
2. Material color: See chart
3. Sheet metal thickness range: 1.0mm - 3.0mm

Global Part Description	View	Bundle Range	Cable Ties			Mount		
			Drawing	Material	Color	Drawing	Material	Color
LPT50REC5A-PA66HS/PA66HIRHSUV/Steel-BK	A	6mm to 50mm	16-0362-001-CSU	PA66HS	Black	10-0382-006-CSU	PA66HIRHSUV/ Steel	Black
LPT50REC5B-PA66HS/PA66HIRHSUV/Steel-BK	B							

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.	Drawn	Date (YYYY/MM/DD)	Title		Scale
Drawing	State	Part	ECN 017115				Rohde	2022/04/12			1:1
01.1	DesignRelease			All drawing revisions are stored in CAD PDM database	Approved	Date (YYYY/MM/DD)	LPT50R with EC5 mount		Global Project Number 22-0123		
Changed	Date (YYYY/MM/DD)										
Rohde	2022/08/08										
Approved	Date (YYYY/MM/DD)				Drawing-No 22-0123-101-CSU		Format	A3			
Van Hulst	2022/08/08						Sheet	1 / 1			
						Units mm		HellermannTyton www.HellermannTyton.com			