




Cavity ID Area: "XXX U"
XXX = Cavity Number
U = United States


Manufacturer Logo

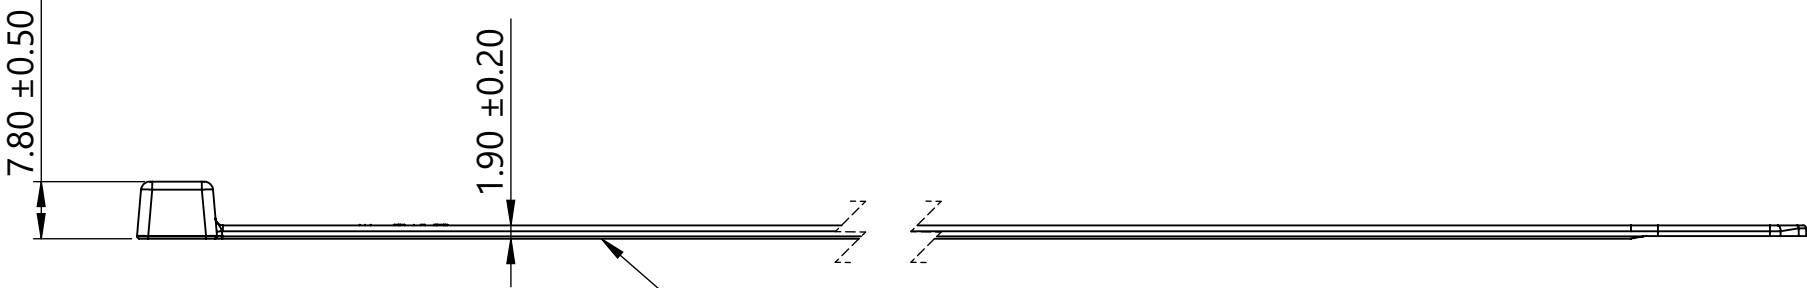

Isometric View
Scale 1 : 3

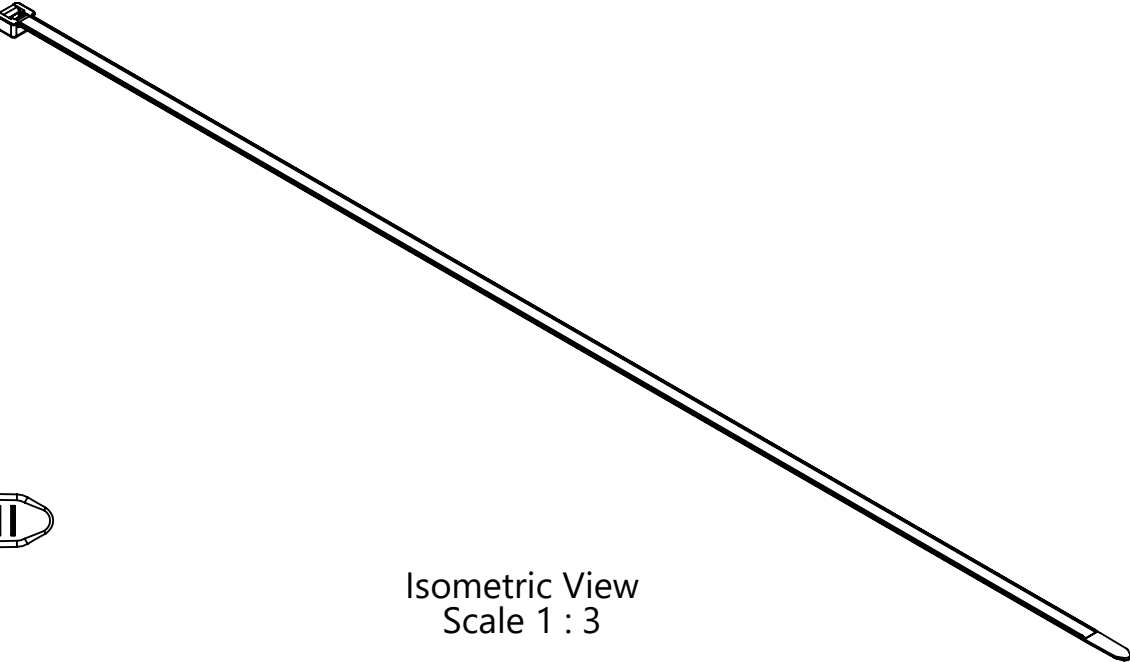

Serrated Side

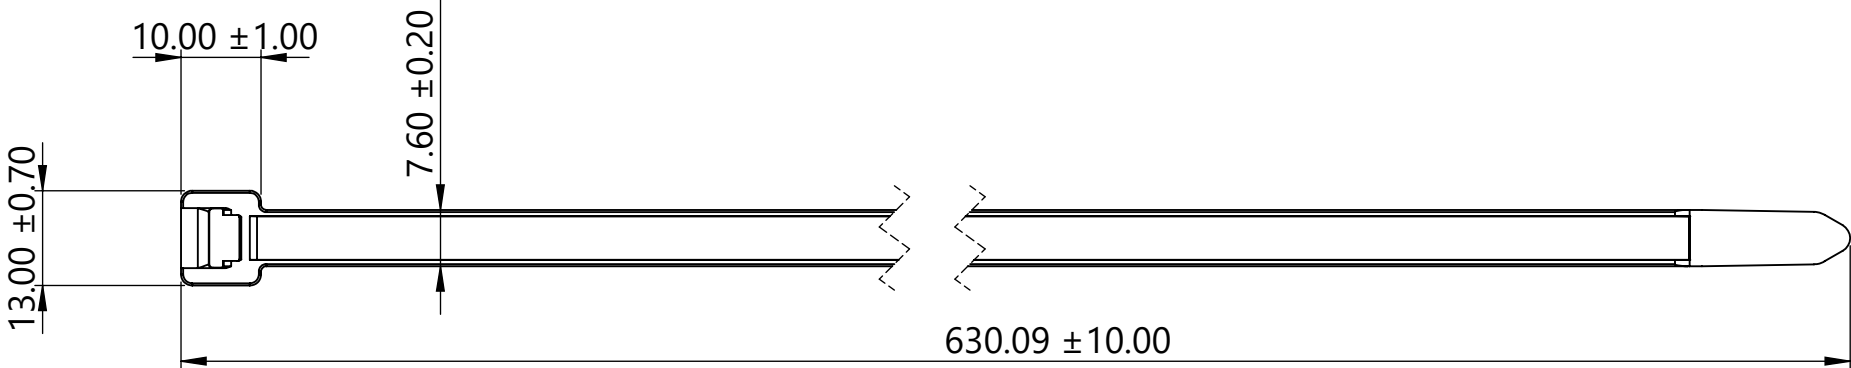

Performance notes:
1. Performance requirements are validated at 50% relative humidity equilibrium (1.0 ± 0.25% H2O by weight)

Notes:
1. Material: See chart
2. Material color: See chart
3. Maximum percent regrind permissible: 7%
4. Maximum allowable flash to be: 0.5 mm
5. Maximum allowable mismatch to be: 0.1 mm

Global Part Description	Material	Color	Minimum Bundle (mm)	Maximum Bundle (mm)	Cable Tie Loop Tensile Strength (N)
T120XLM-PA612-BK	PA612	Black	5.0	184.0	535 [N]

Revision level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.	Drawn		Date (YYYY/MM/DD)	Title T120XLM Heavy Duty Lashing Cable Tie			Scale 1:1	
Drawing	State		Part	ECN 310572 - Initial Release				Johnson	2023/04/26				Global Project Number 22-0174	
00.0	Design Release		-				Approved		Date (YYYY/MM/DD)	Drawing-No 22-0174-002-CSU		Format A3		
Changed		Date (YYYY/MM/DD)					Uhler		2023/05/02			Sheet 1/1		
Johnson		2023/04/26												
Approved		Date (YYYY/MM/DD)												
Uhler		2023/05/02												

Units
mm

HellermannTyton
www.HellermannTyton.com