
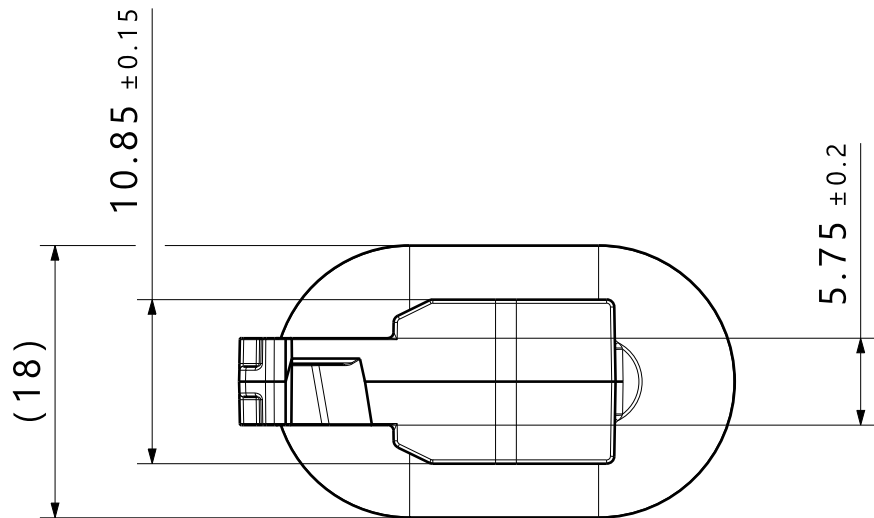
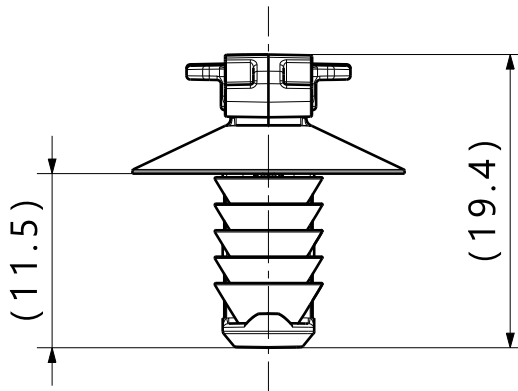
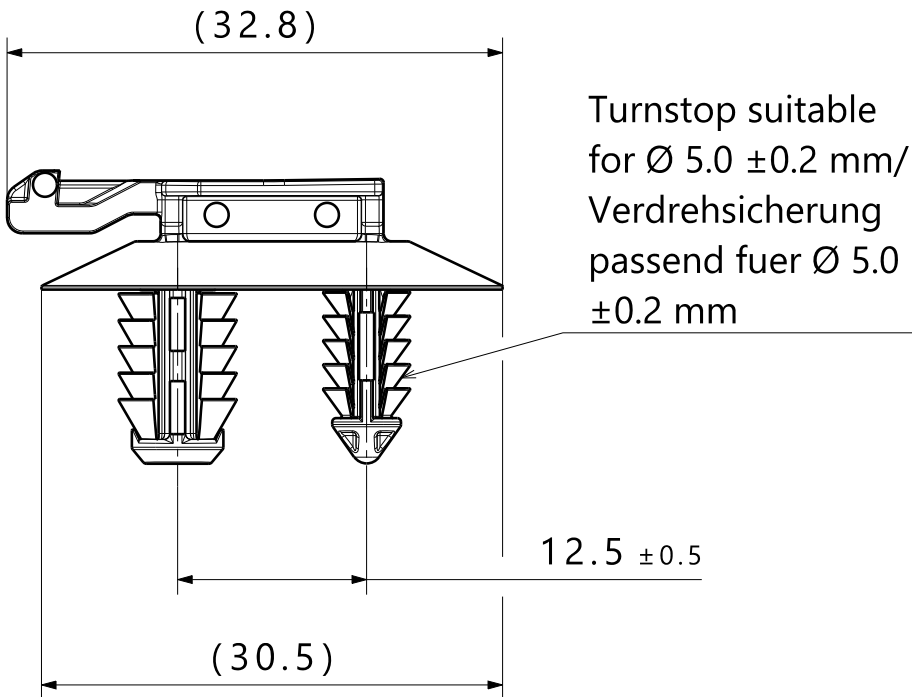


1:1



Printed copy for information only/
Ausdruck nur zur Information

Specification:


- Material: PA6.6
heatstabilized
impact modified
- Material color: black
- Hole size: 6.5 ±0.4 mm
- Panel thickness: 0.6 - 5.5 mm
- Connector retainer fits into USCAR
clip slot specification EWCAP-005-11
(not a test spec)

Spezifikation:

- Material: PA6.6
hitzestabilisiert,
schlagzaeh modifiziert
- Material Farbe: schwarz
- Loch Ø: 6.5 ±0.4 mm
- Blechdicke: 0.6 - 5.5 mm
- Steckeraufnahme passend fuer USCAR
Spezifikation EWCAP-005-11
(keine Pruefspezifikation)

The manufacturing-related geometry
changes (injection point,
ejectors marks, etc.) allowed.
Design of the details are left to
suppliers discretion.

Durch das Herstellverfahren bedingte
Geometrieaenderungen (Anspritzung,
Auswerfermarkierungen, etc.) zulaessig.
Einzelheiten der Ausfuehrung bleiben
dem Hersteller ueberlassen.

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.		Drawn		Date (YYYY/MM/DD)		Title		Scale	
Drawing	State		Part	I. Langeloh				2024/10/30		2:1					
00.4	Design Release		00	Approved				Date (YYYY/MM/DD)		C. Cordts		2024/10/30		Global Project Number	
Changed		Date (YYYY/MM/DD)		All drawing revisions are stored in CAD PDM database				Units mm		HellermannTyton www.HellermannTyton.com		Drawing-No 22-2297-001-CSG		22-2297	
														Format	
Approved		Date (YYYY/MM/DD)												A3	
												Sheet			
												1 / 1			

All drawing
revisions are
stored in CAD
PDM database

Units
mm

HellermannTyton
www.HellermannTyton.com

22-2297-001-CSG

1 / 1