



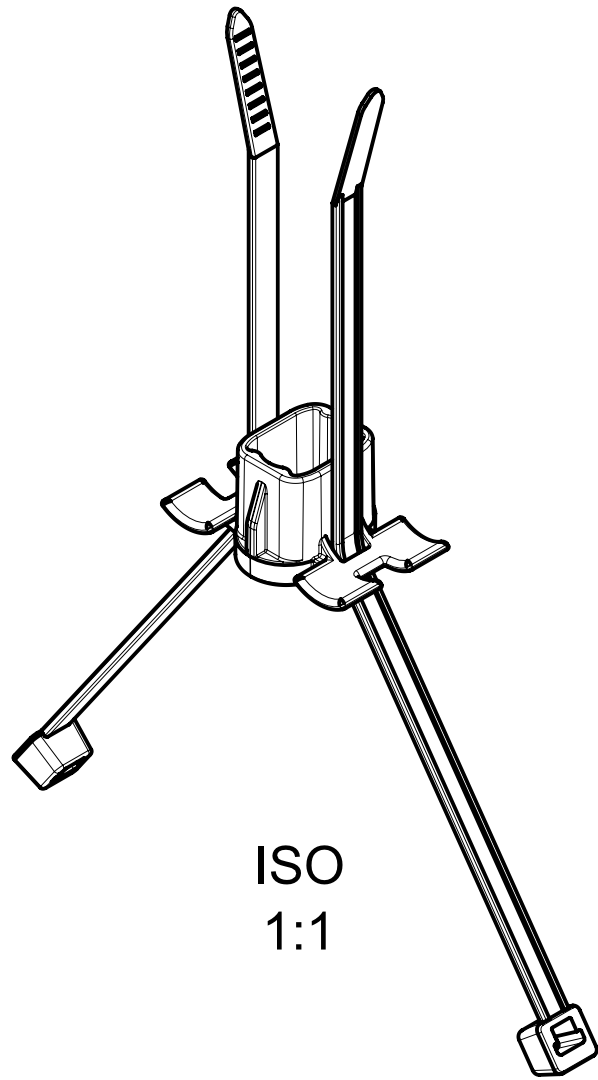

ISO
1:1

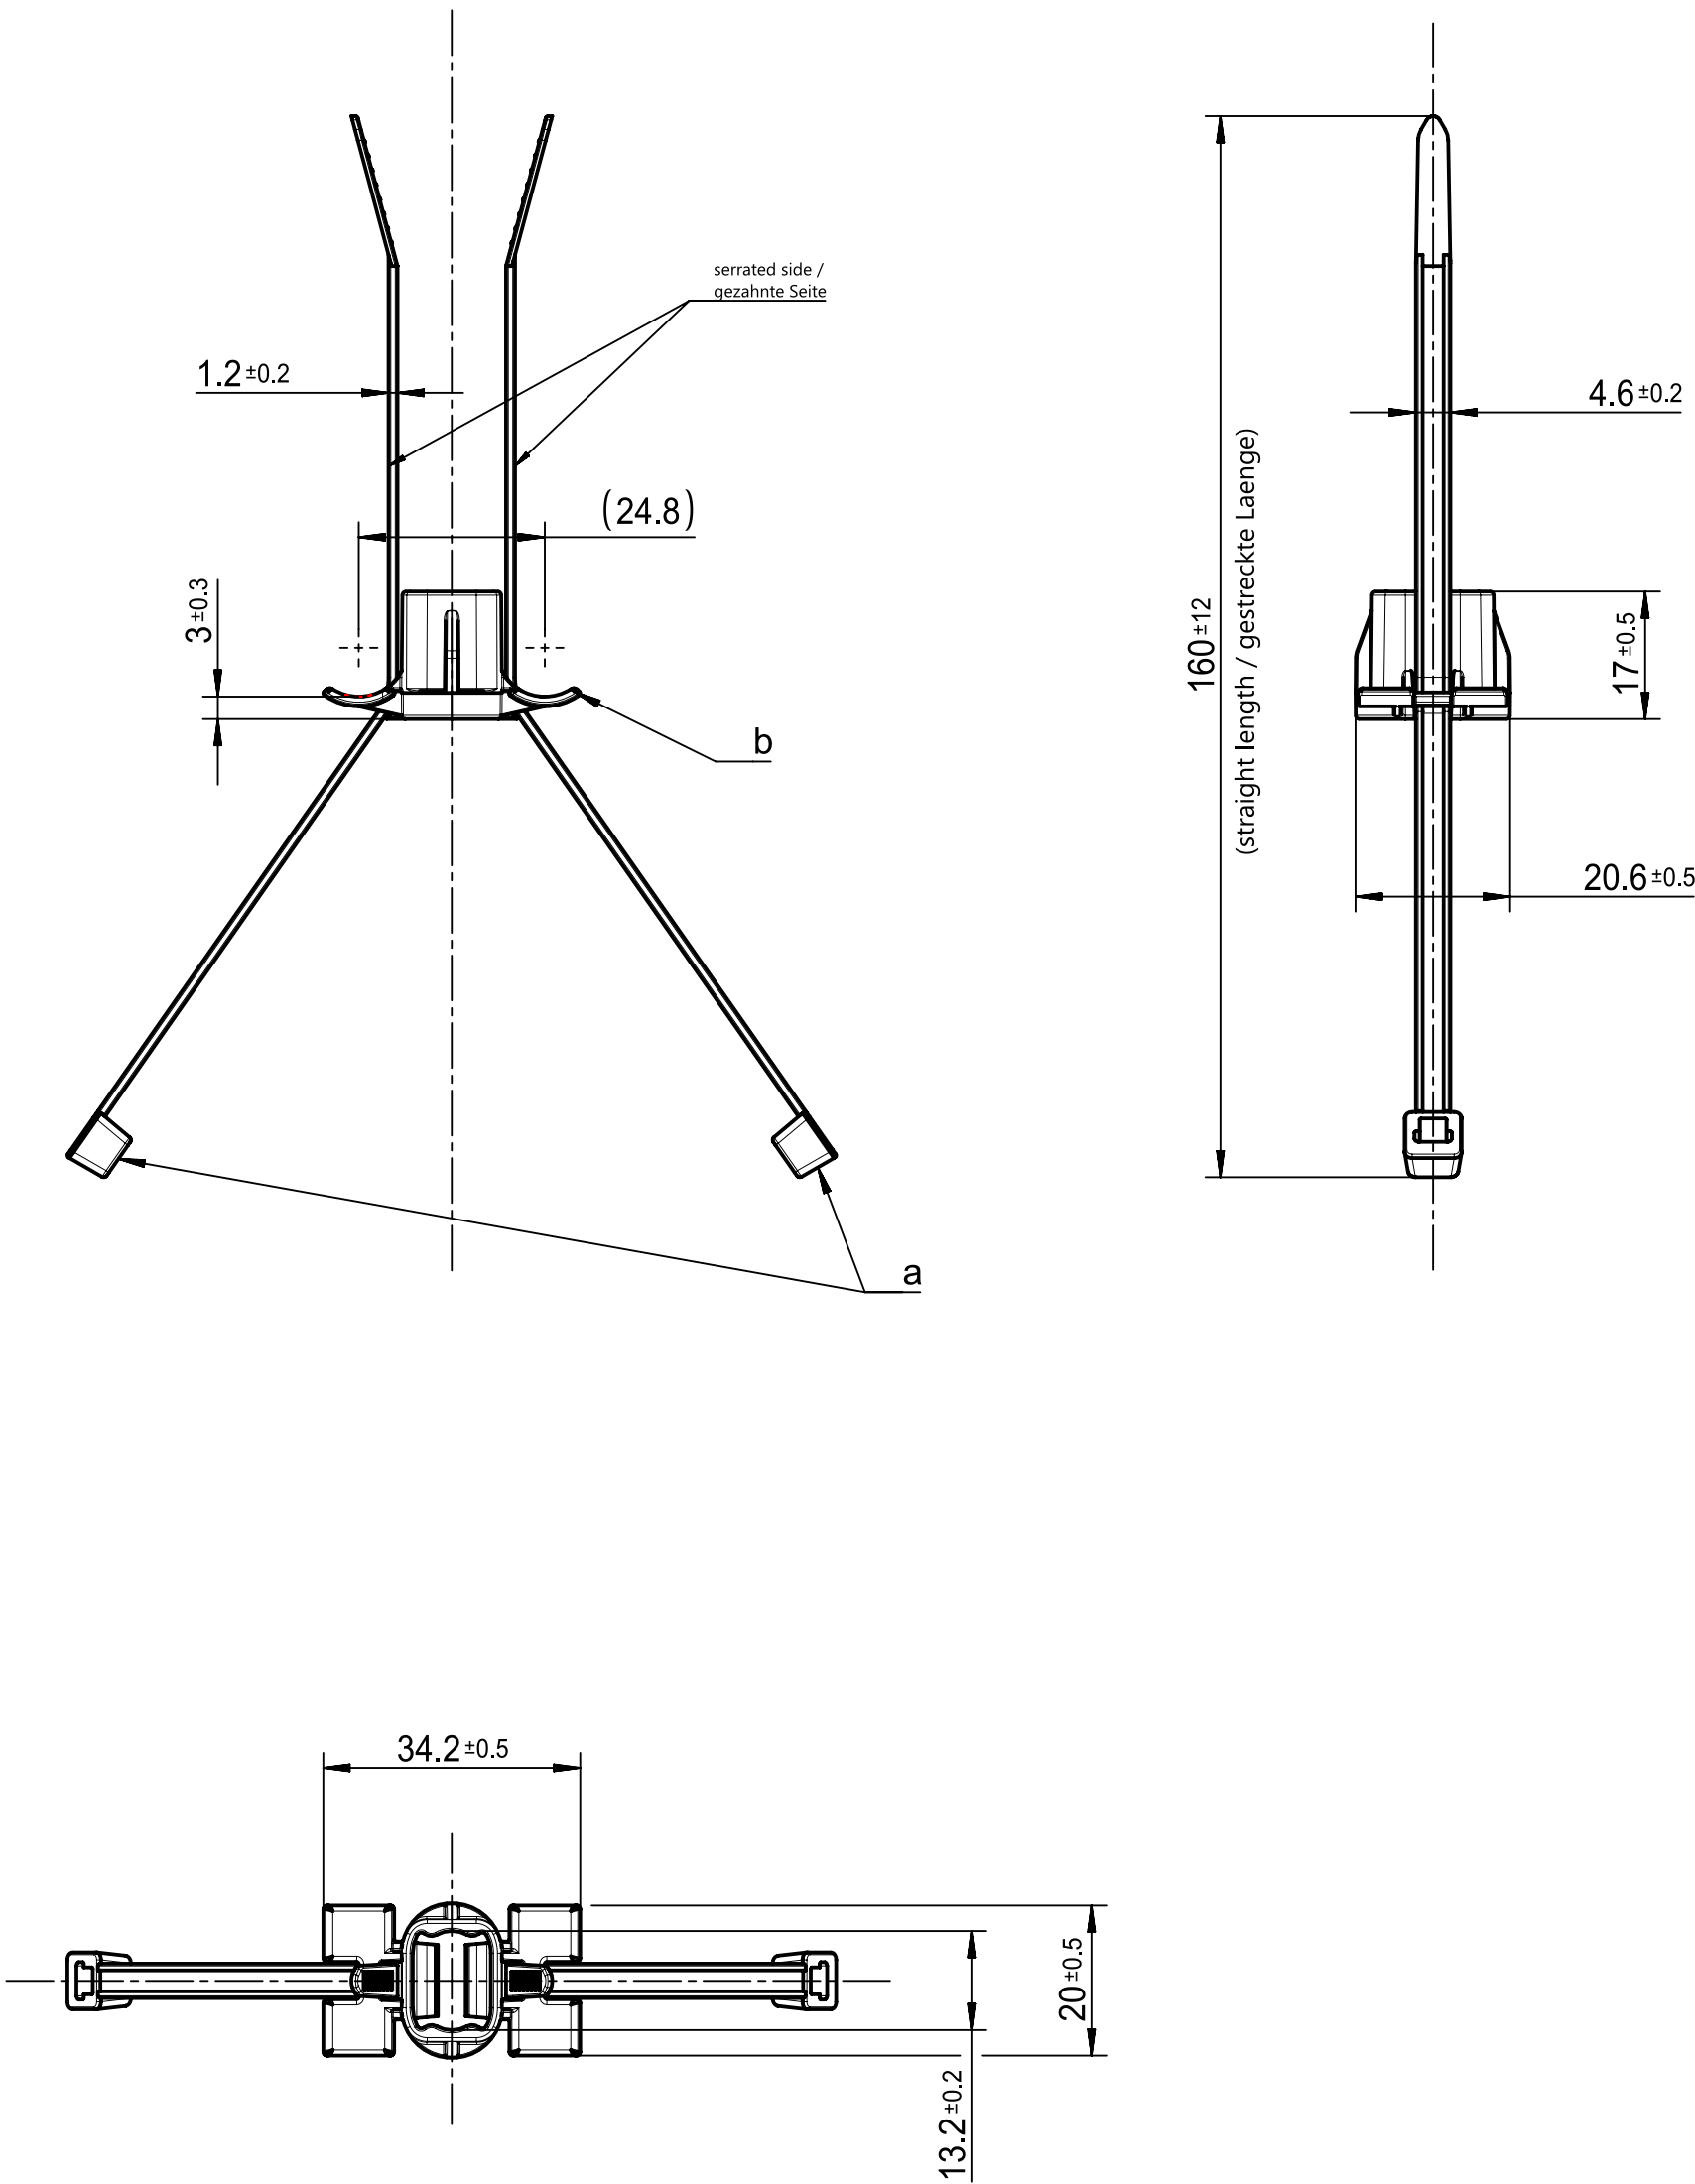

Specification:
- Performance requirement at equilibrium condition standard atmosphere 23°C / 50% RH

- Material: part a: PA66 heat stabilized part b: PA66 heat stabilized, impact modified
- Material color: part a: black part b: black

- Bundle Ø: 2 - 35 mm
- Tensile force: min. 225 N

- Weld stud: T5 / T6 / M5 / M6
- max. length: 16 mm

Manufacturing-related geometry changes (e.g. gating point, ejector marks) permitted. Details of the article design are left to the discretion of the supplier.

Spezifikation:
- Leistungsanforderungen im Gleichgewichtszustand Normalklima 23°C / 50% RH

- Material: Teil a: PA66 hitzestabilisiert Teil b: PA66 hitzestabilisiert, schlagzaeh modifiziert
- Materialfarbe: Teil a: schwarz Teil b: schwarz

- Buendel Ø: 2 - 35 mm
- Schlaufenhaltekraft: min. 225 N

- Schweißbolzen: T5 / T6 / M5 / M6
- max. Laenge: 16 mm

Durch das Herstellungsverfahren bedingte Geometrieaenderungen (z.B. Anspritzpunkt, Auswerfermarkierungen) zulaessig. Einzelheiten der Artikelausfuehrung bleiben dem Hersteller ueberlassen.

Semi-finished part / Halbfabrikat		Project number / Projektnummer	
T50S	a		
	b		
DSB5-6H			
GPN22-2330			

Product type / Artikelbezeichnung	Project number / Projektnummer		
T50SDSB5-6H	GPN22-2331	X	X

Revision Level			Revision Record				Drawn		Date (YYYY/MM/DD)	Title	T50SDSB5-6H	Scale	
Drawing	State	Part	All drawing revisions are stored in CAD PDM database				S.Maschmann		2024/08/09			2:1	
00.8	Design Release	0					Approved		Date (YYYY/MM/DD)			Global Project Number	
Changed	Date (YYYY/MM/DD)						I.Langeloh		2024/08/09			22-2331	
Approved		Date (YYYY/MM/DD)				Units	HelleermannTyton			Drawing-No	Format		
						mm	www.HelleermannTyton.com			22-2331-001-CSG	A2		
									Sheet				
									1 / 1				