
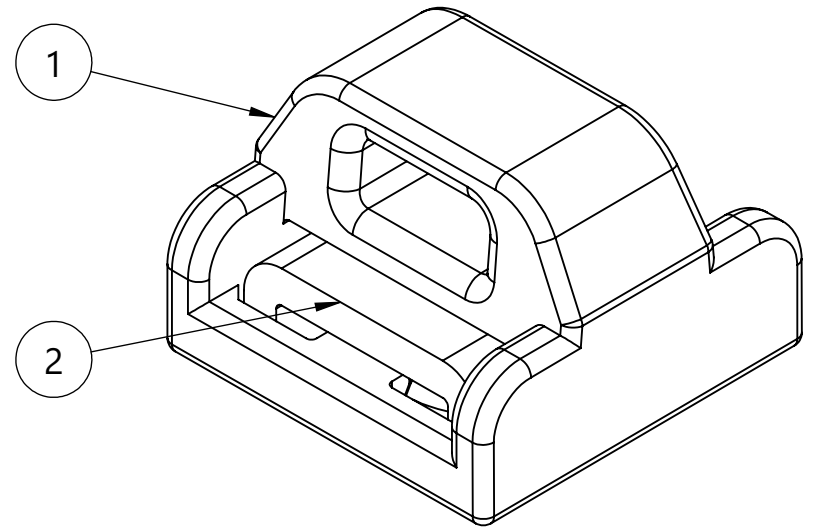
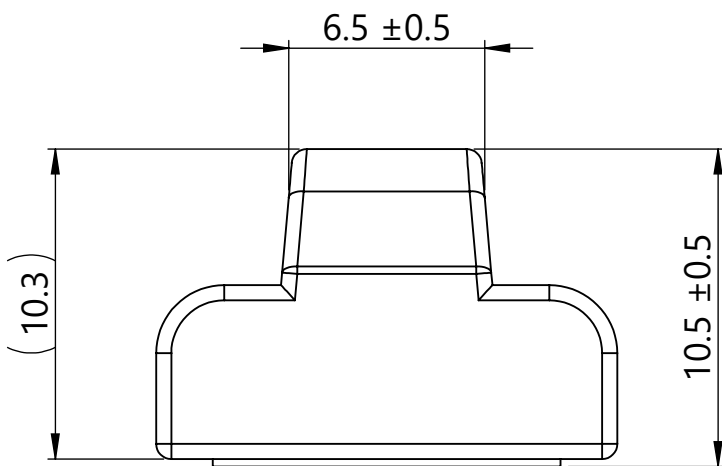
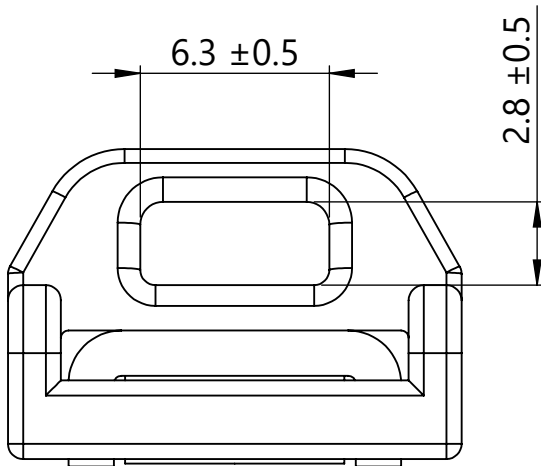


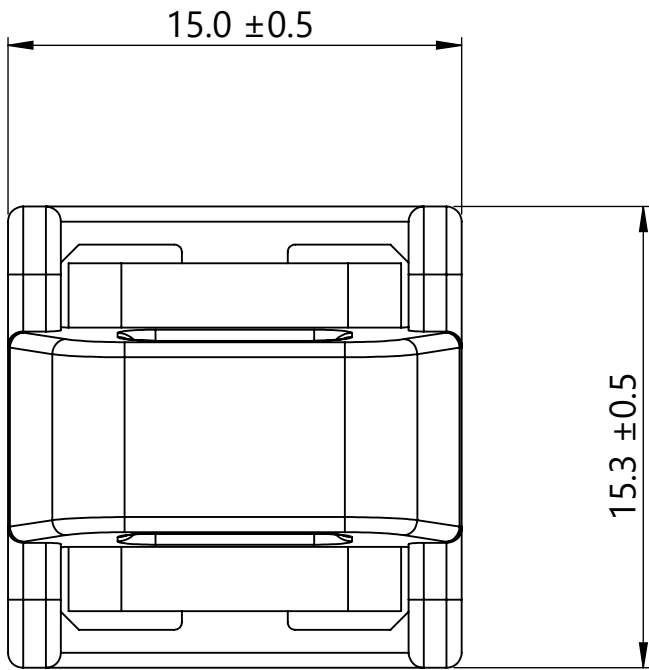

Isometric View

- Reference:
- 1. Material: See chart
 - 2. Material color: See chart
 - 3. Min. Vertical Pull Force: 22N (5 lbf)
 - 4. Maximum percent regrind permissible: 10%
 - 5. Maximum allowable flash to be: 0.25mm
 - 6. Magnets are very strong. Handling them with care is necessary to prevent personal injuries, property damages and magnet damages
 - 7. Listed pull force values are based on magnet strength only. Assembled product performance will vary based on application and surface type. Please test application to determine best product fit

UL US LISTED UL Listing		
ANSI/UL 62275	Positioning Devices TYPE 21 E64139	22N (5 lbf) Vertical Pull
CAN	CSA-C22.2 No. 62275	
All testing performed using 3mm min. thick 1008-1010 steel plate		

Global Part Description	Item No.	Qty.	Material	Finish	Color
MAGCTM5M-NDFEB35/POM/ST-BK	1	1	POM	-	Black
	2	1	NdFeB N35M	NiCuNi	Silver
		1	Steel	Zinc Coating	

Revision level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.		Drawn	Date (YYYY/MM/DD)	Title Magnetic Cable Tie Mount Mini, 5 lbf pull rate			Scale 4:1	
Drawing	State		Part	ECN 017476 - Initial Release				Johnson	2023/04/03				Global Project Number 23-0062	
00.3	Design Release		-	All drawing revision are stored in CAD PDM database				Units mm	HellermannTyton www.HellermannTyton.com	Approved	Date (YYYY/MM/DD)	Drawing-No 23-0062-001-CSU	Format A3	
Changed		Date (YYYY/MM/DD)			Toll	2023/04/14	Sheet 1/1							
Johnson		2023/04/03												
Approved		Date (YYYY/MM/DD)												
Toll		2023/04/14												