
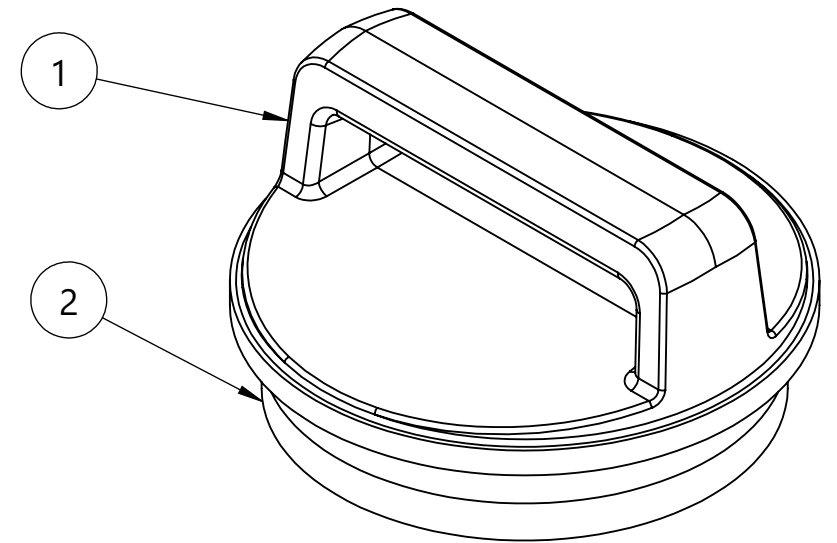
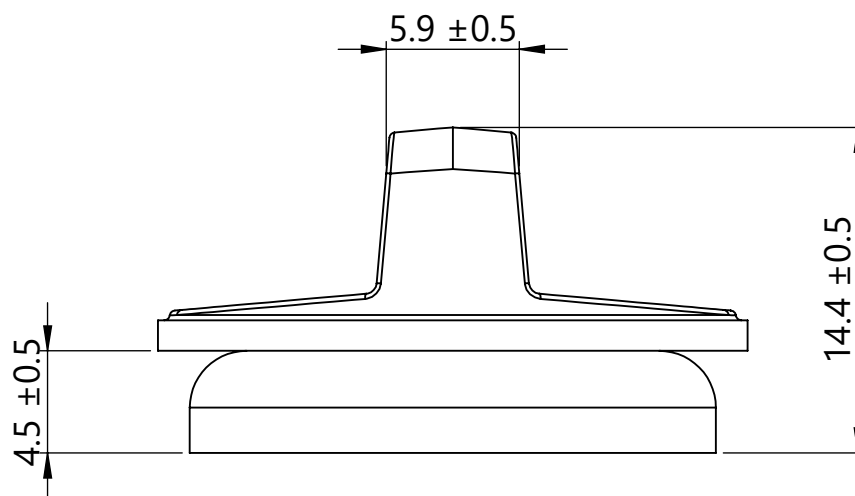
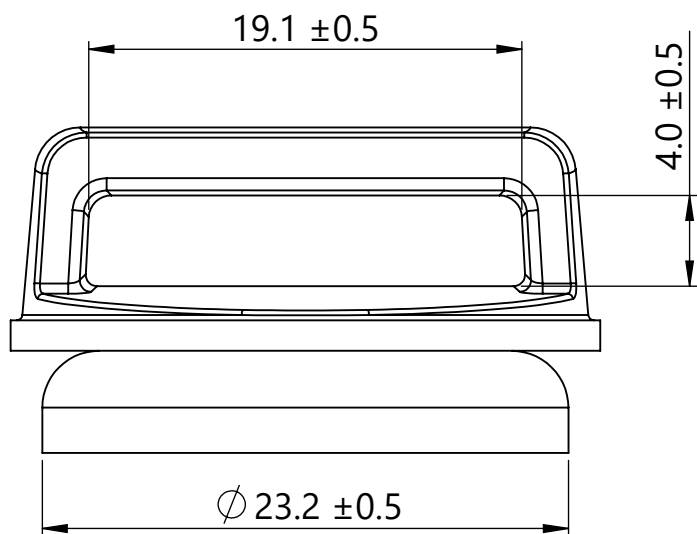


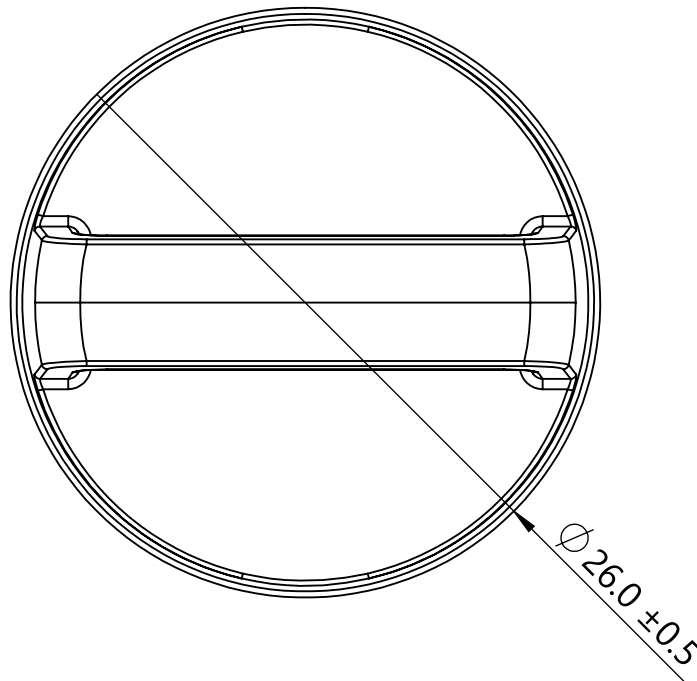

Isometric View

Reference:

1. Material: See chart
2. Material color: See chart
3. Min. Vertical Pull Force: 66N (15 lbf)
4. Maximum percent regrind permissible: 10%
5. Maximum allowable flash to be: 0.25mm
6. Magnets are very strong. Handling them with care is necessary to prevent personal injuries, property damages and magnet damages
7. Listed pull force values are based on magnet strength only. Assembled product performance will vary based on application and surface type. Please test application to determine best product fit

UL Listing			
ANSI/UL 62275	Positioning Devices TYPE 21 E64139	66N (15 lbf) Vertical Pull	All testing performed using 3mm min. thick 1008-1010 steel plate
CAN	CSA-C22.2 No. 62275		

Global Part Description	Item No.	Qty.	Material	Finish	Color
MAGCTM15H-NDFEB35/POM/ST-BK	1	1	POM	-	Black
	2	1	NdFeB N35M	NiCuNi	Silver
		1	Steel	Black Epoxy	Black

Revision level			Revision Record				Drawn		Date (YYYY/MM/DD)		Title				Scale				
Drawing	State	Part					ECN 017476 - Initial Release		Johnson						2023/03/10		3:1		
00.3	Design Release	-			The copyright of this drawing is reserved by HellermannTyton.		Approved		Date (YYYY/MM/DD)		Magnetic Cable Tie Mount Grip Tie, 15 lbf pull rate				Global Project Number				
Changed		Date (YYYY/MM/DD)					Toll		2023/04/14						23-0063				
Johnson		2023/03/10					Units mm		HellermannTyton www.HellermannTyton.com						Format				
Approved		Date (YYYY/MM/DD)													A3				
Toll		2023/04/14				All drawing revision are stored in CAD PDM database		Drawing-No 23-0063-001-CSU				Sheet							
												1/1							