
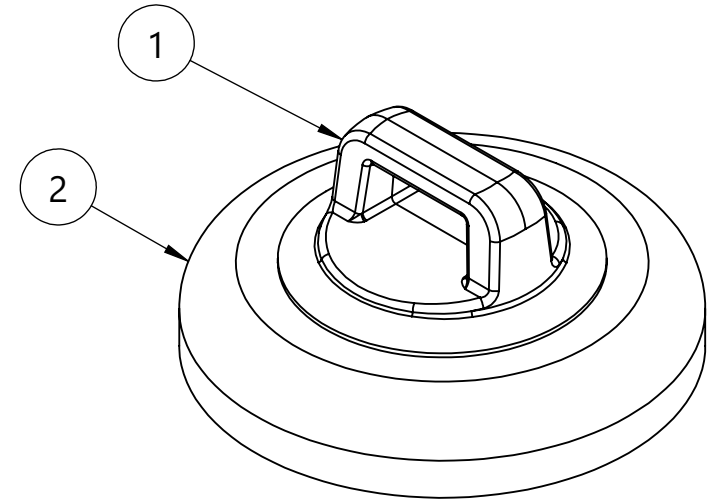
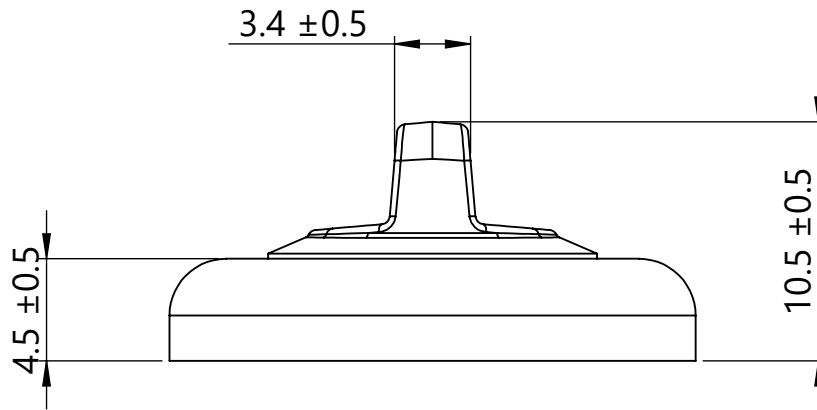
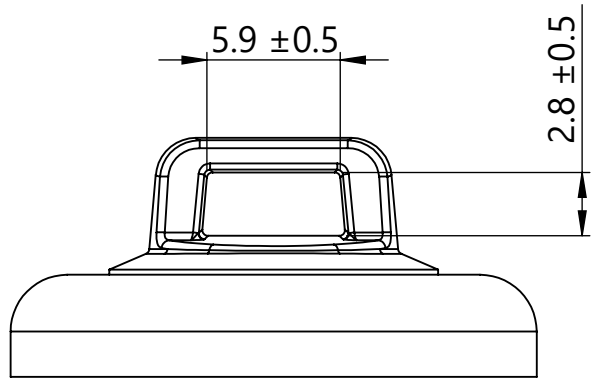


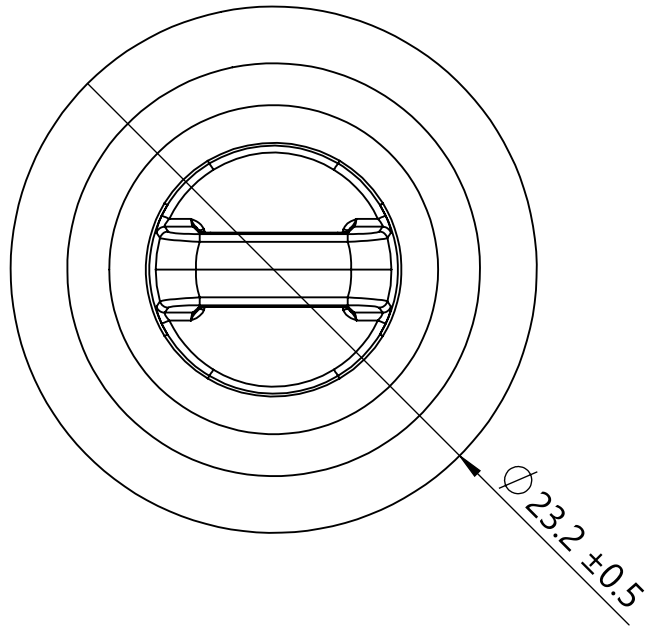

Isometric View

Reference:

1. Material: See chart
2. Material color: See chart
3. Min. Vertical Pull Force: 66.7N (15 lbf)
4. Maximum percent regrind permissible: 10%
5. Maximum allowable flash to be: 0.25mm
6. Magnets are very strong. Handling them with care is necessary to prevent personal injuries, property damages and magnet damages
7. Listed pull force values are based on magnet strength only. Assembled product performance will vary based on application and surface type. Please test application to determine best product fit

UL LISTED UL Listing		
ANSI/UL 62275	Positioning Devices TYPE 21 E64139	66N (15 lbf) Vertical Pull
CAN	CSA-C22.2 No. 62275	
All testing performed using 3mm min. thick 1008-1010 steel plate		

Global Part Description	Item No.	Qty.	Material	Finish	Color
MAGCTM15L-NDFEB35/POM/ST-BK	1	1	POM	-	Black
	2	1	NdFeB N35M	NiCuNi	Silver
		1	Steel	Epoxy	Black

Revision level			Revision Record				Drawn		Date (YYYY/MM/DD)		Title Magnetic Cable Tie Mount Large, 15 lbf pull rate, Black				Scale 3:1		
Drawing	State	Part	ECN 017476 - Initial Release				Johnson		2023/03/10						Global Project Number 23-0065		
00.3	Design Release		-	 All drawing revision are stored in CAD PDM database				Approved		Date (YYYY/MM/DD)		Drawing-No 23-0065-002-CSU				Format A3	
Changed		Date (YYYY/MM/DD)						Toll		2023/04/14						Sheet 1/1	
Johnson		2023/03/10						Units mm		HellermannTyton www.HellermannTyton.com							
Approved		Date (YYYY/MM/DD)															
Toll		2023/04/14															

The copyright of this drawing is reserved by HellermannTyton.

All drawing revision are stored in CAD PDM database

Units
mm

HellermannTyton
www.HellermannTyton.com

23-0065-002-CSU