
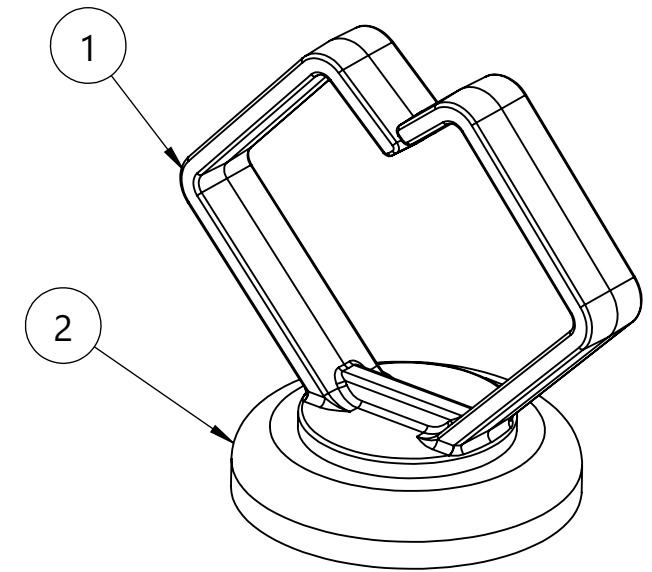
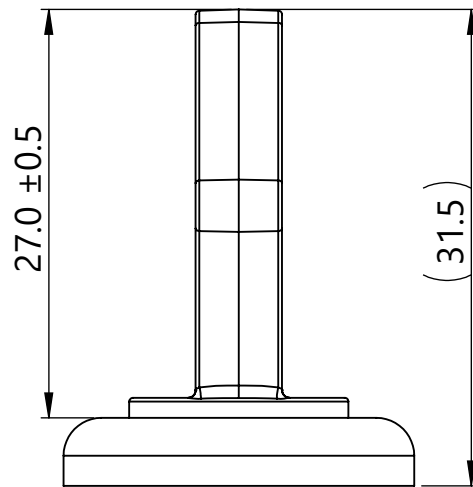
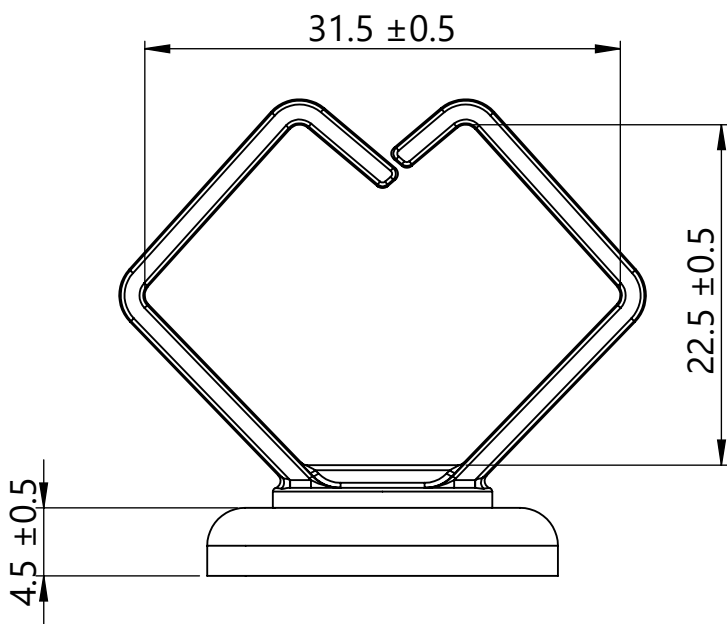



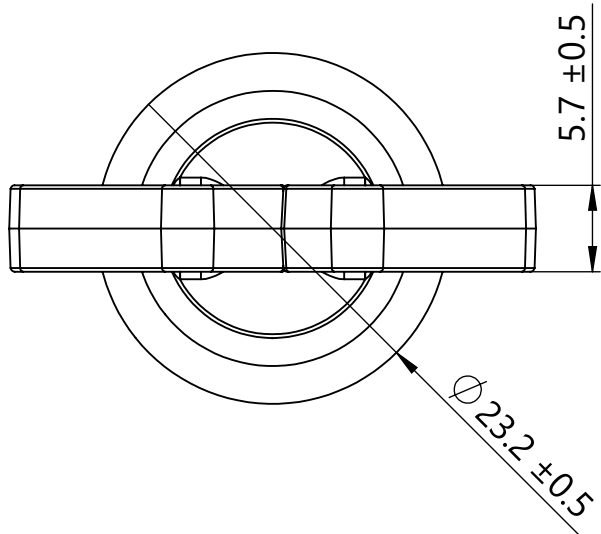


Isometric View

- Reference:
1. Material: See chart
 2. Material color: See chart
 3. Min. Vertical Pull Force: 66.7N (15 lbf)
 4. Maximum percent regrind permissible: 10%
 5. Maximum allowable flash to be: 0.25mm
 6. Magnets are very strong. Handling them with care is necessary to prevent personal injuries, property damages and magnet damages
 7. Listed pull force values are based on magnet strength only. Assembled product performance will vary based on application and surface type. Please test application to determine best product fit

UL Listing		
	ANSI/UL 1565	Positioning Devices TYPE 21 E64139
CAN	CSA-C22.2 No. 18.5	66N (15 lbf) Vertical Pull
All testing performed using 3mm min. thick 1008-1010 steel plate		

Global Part Description	Item No.	Qty.	Material	Finish	Color
MAGC15L-NDFEB35/POM/ST-POM-BK	1	1	POM	-	Black
	2	1	NdFeB N35M	NiCuNi	Silver
			Steel	Epoxy	Black

Revision level			Revision Record				Drawn		Date (YYYY/MM/DD)		Title Magnetic Clip, 1 in. clip, Large, 15 lbf pull rate				Scale 2:1										
Drawing	State	Part	ECN 017485 - Initial Release				Johnson	2023/04/18	Approved	Date (YYYY/MM/DD)					Toll	2023/04/20	Global Project Number 23-0068								
00.0	Design Release	-			All drawing revision are stored in CAD PDM database		The copyright of this drawing is reserved by HellermannTyton.		Date (YYYY/MM/DD)		Drawing-No 23-0068-001-CSU				Format A3										
Changed		Date (YYYY/MM/DD)															Toll		2023/04/20						
Johnson		2023/04/18																	www.HellermannTyton.com				Sheet 1/1		
Approved		Date (YYYY/MM/DD)																							
Toll		2023/04/20																							