



Isometric View
Scale 2:1

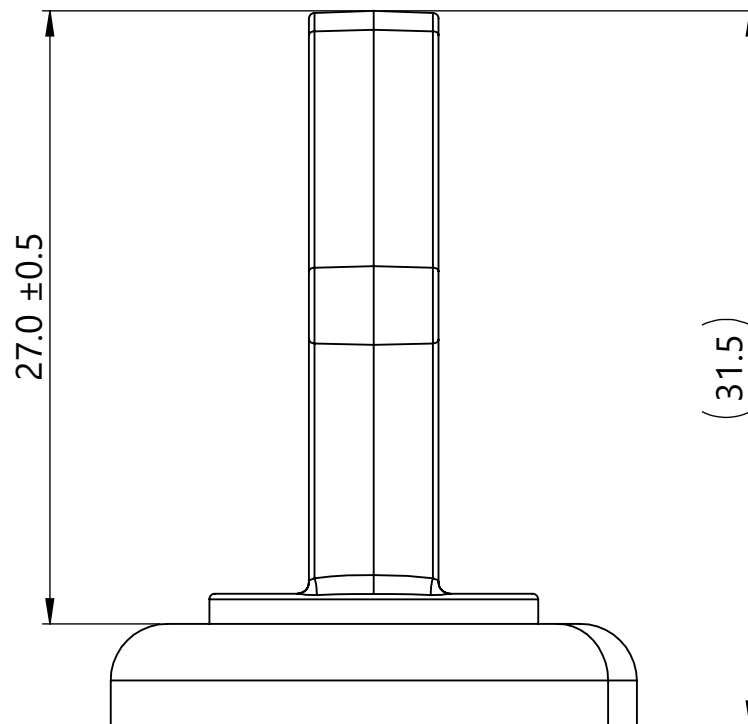

Reference:


1. Material: See chart
2. Material color: See chart
3. Min. Mechanical Tensile Strength: 36N (8 lbf)
4. Maximum percent regrind permissible: 10%
5. Maximum allowable flash to be: 0.25mm
6. Magnets are very strong. Handling them with care is necessary to prevent personal injuries, property damages and magnet damages
7. Listed pull force values are based on magnet strength only. Assembled product performance will vary based on application and surface type. Please test application to determine best product fit

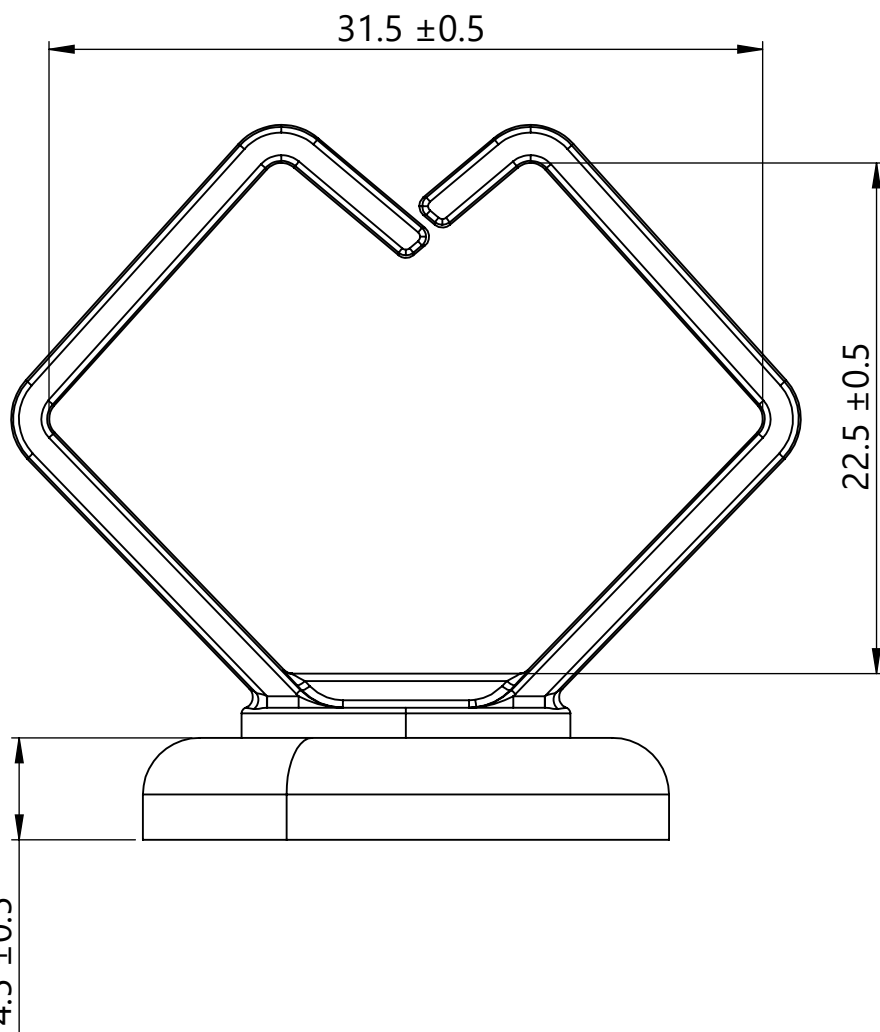

UL Listing		
Magnetic Cable Holder 1 in.		
ANSI/UL 1565	Positioning Devices TYPE 21 E64139	Mechanical Tensile Strength:
CAN	CSA-C22.2 No. 18.5	36N (8 lbf)
All testing performed using 3mm min. thick 1008-1010 steel plate		

Global Part Description	Item No.	Qty.	Material	Finish	Color
MAGC15L-NDFEB39/POM/ST-WH	1	1	POM	-	White
	2	1	NdFeB N39M	NiCuNi	Silver
			Steel	Epoxy	White

Revision level			Revision Record			Drawn		Date (YYYY/MM/DD)	Title Magnetic Cable Holder, 1 in. clip, Large, UL Listed 8 lb			Scale 3:1			
Drawing	State		Part	ECN 311050 - Initial Release		Johnson		2024/04/29				Global Project Number 23-0068			
00.0	Design Release		-			The copyright of this drawing is reserved by HellermannTyton.		Date (YYYY/MM/DD)		Drawing-No 23-0068-002-CSU			Format A3		
Changed		Date (YYYY/MM/DD)						Uhler					2024/05/20	Sheet 1/1	
Johnson		2024/04/29													
Approved		Date (YYYY/MM/DD)													
Uhler		2024/05/20													
			All drawing revision are stored in CAD PDM database		Units mm		HellermannTyton www.HellermannTyton.com								



All drawing revision are stored in CAD PDM database

The copyright of this drawing is reserved by HellermannTyton.

Units
mm

HellermannTyton
www.HellermannTyton.com