


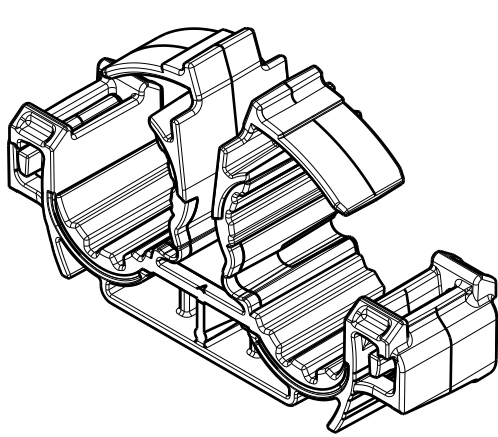
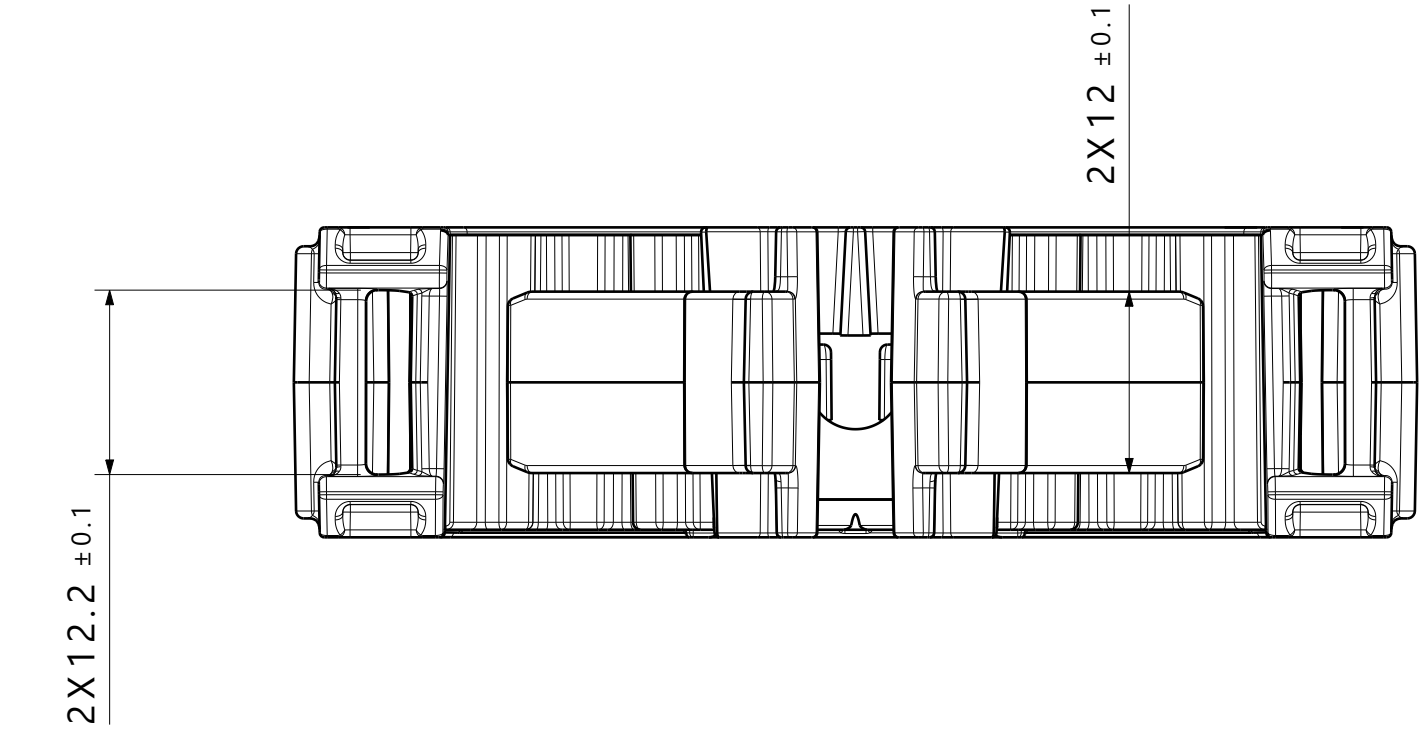
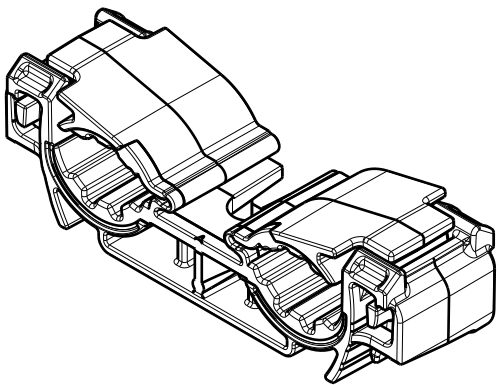


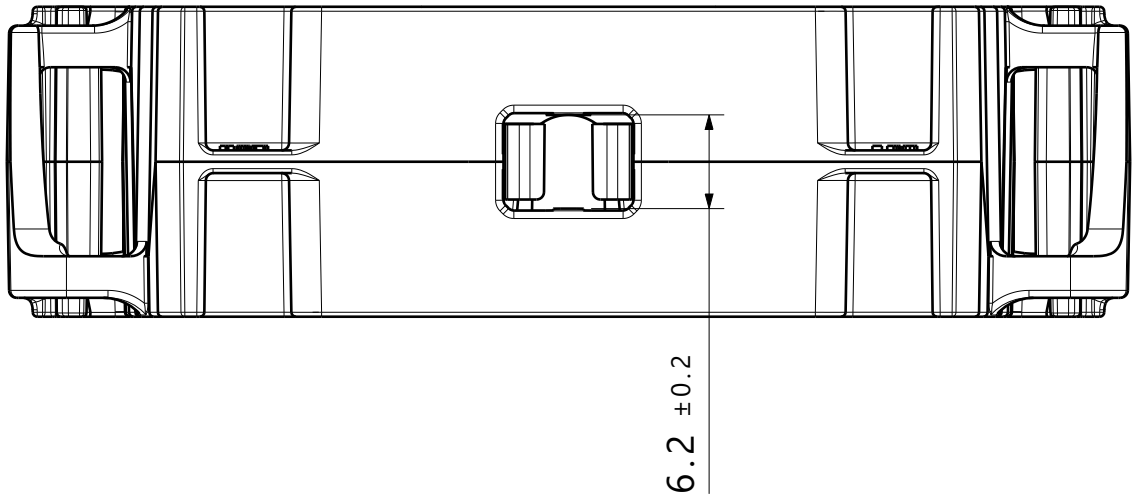

Isometric view
Open position
Scale 1:1

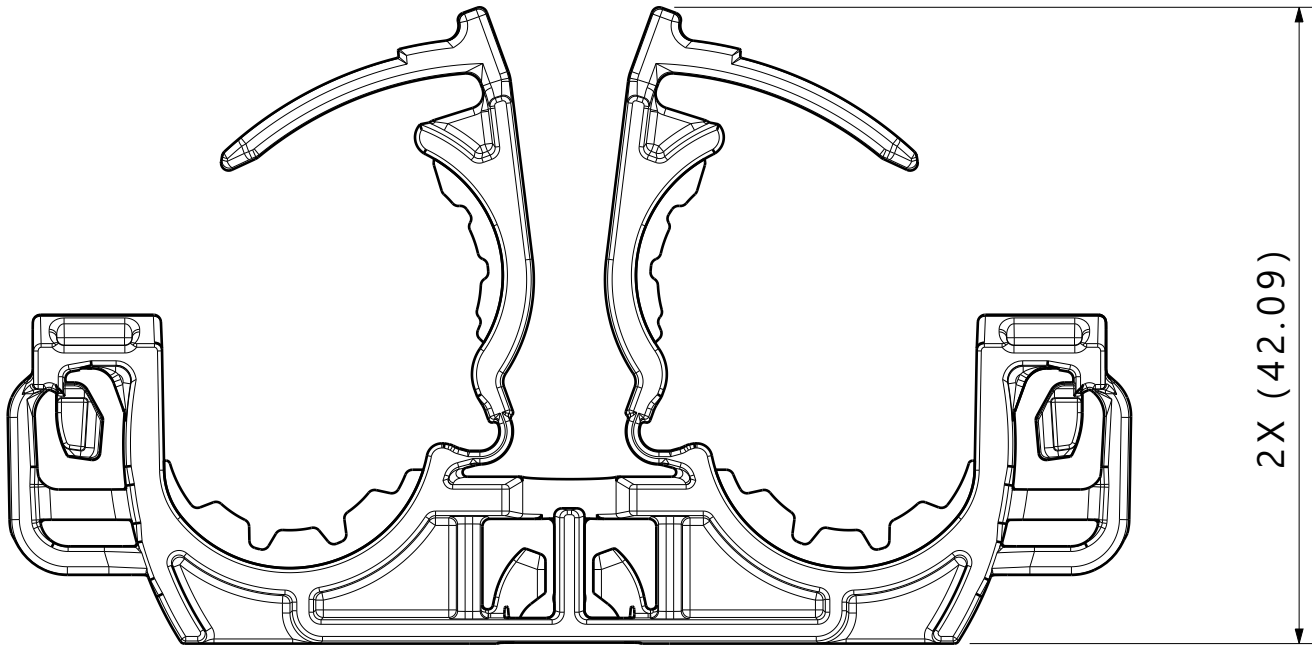


Isometric view
Closed position
Minimum bundle
Scale 1:1

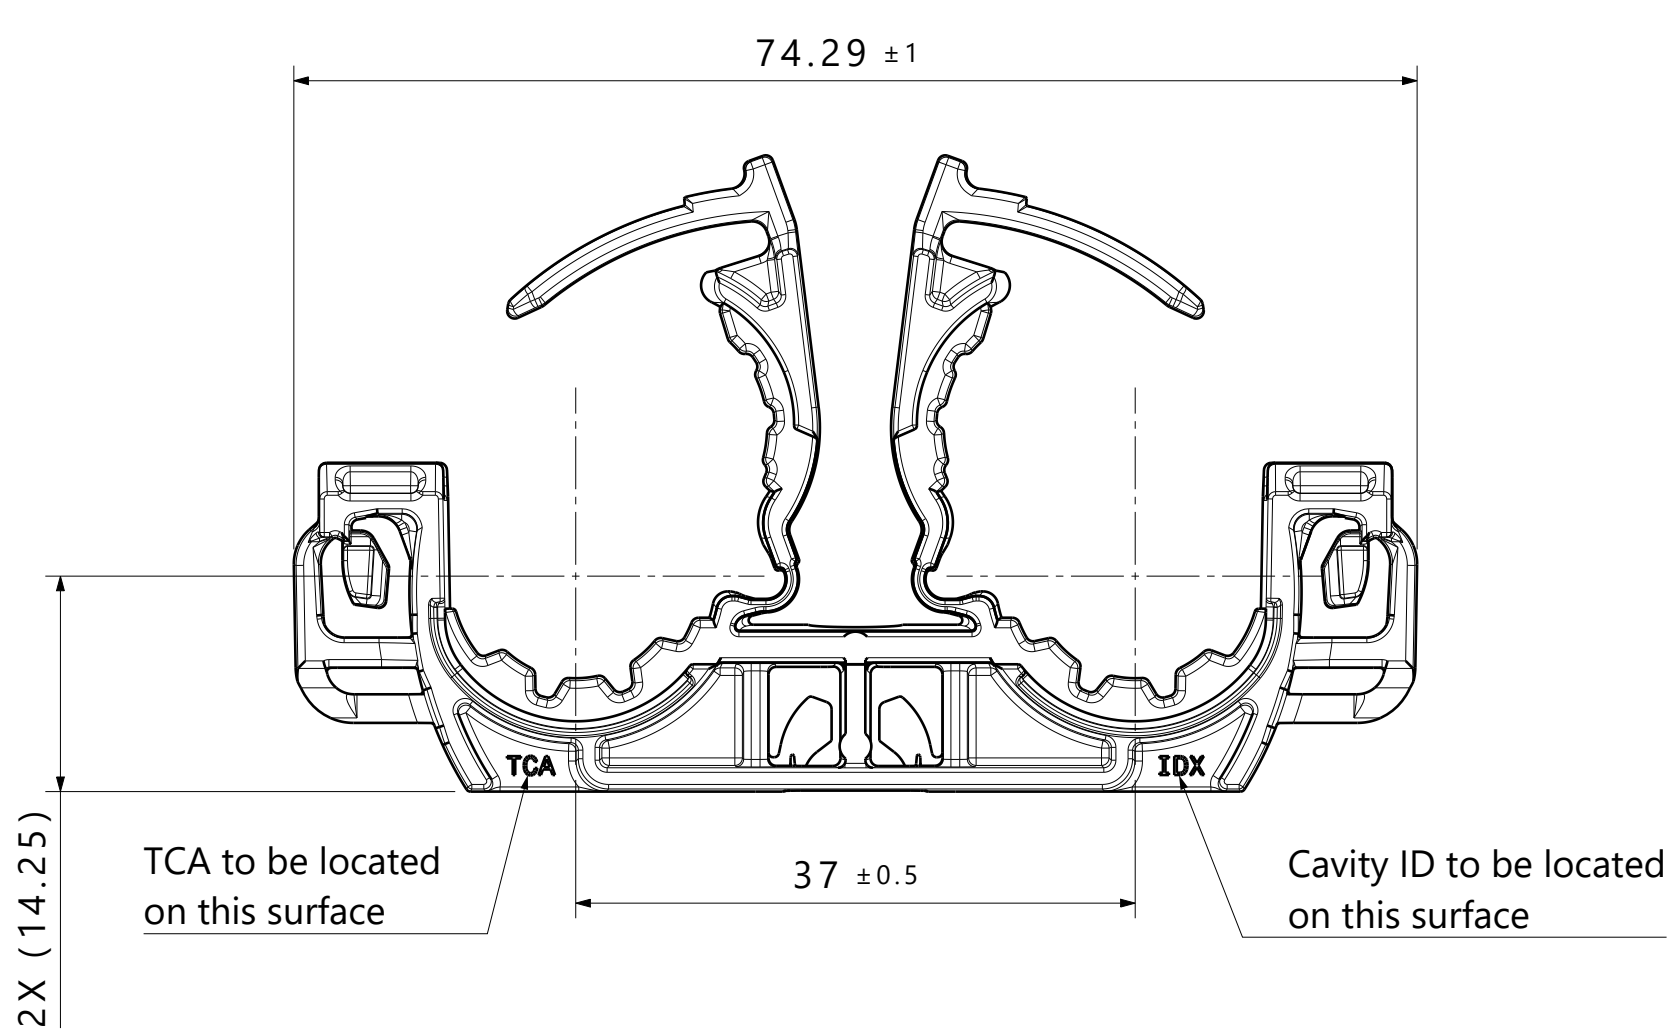


Reference:
Performance requirements at dry as molded:
1. Stud mount push on force: 45 newtons (10 lbf) max on each applicable stud size.
2. Stud mount pull off force: 110 newtons (25 lbf) min on each applicable stud size.

- Notes:
- 1. Material: See chart
 - 2. Material color: See chart
 - 3. Maximum percent regrind permissible: 25% PA66 only
 - 4. Max allowable flash to be: 0.5mm
 - 5. Max allowable mismatch to be: 0.1mm
 - 6. Applicable stud size:
 - A. M5 x 0.8
 - B. M6 x 1

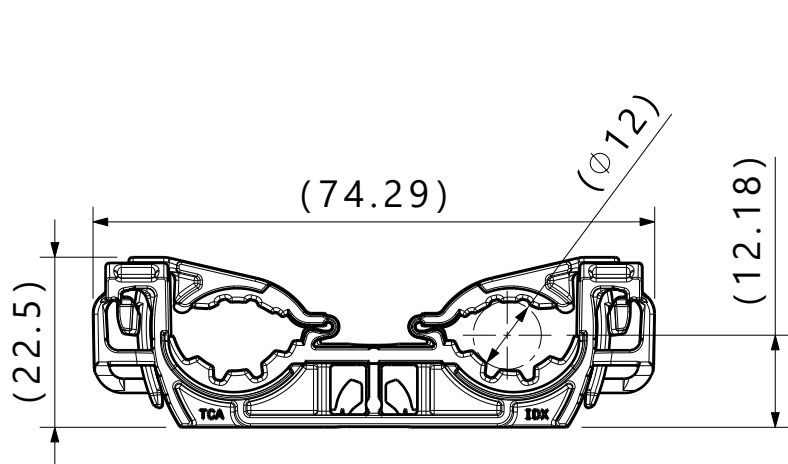

Closed position
Minimum bundle diameter
Scale 1:1

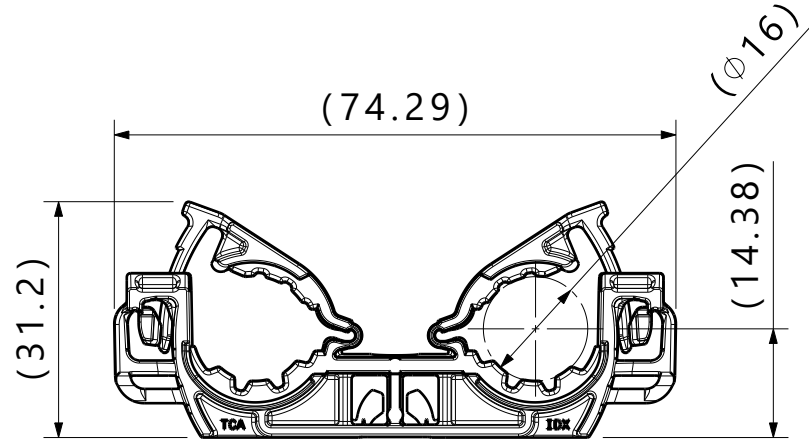

Closed position
Maximum bundle diameter
Scale 1:1

Revision Level			Revision Record				The copyright of this drawing is reserved by HellermannTyton.		Date (YYYY/MM/DD)		Title Overmolded Dual Ratchet O-Clamp, 12-16mm, 5mm and 6mm stud mount			Scale	
Drawing	State	Part	ECN# 310196						Van Hulst	2024/06/13				Global Project Number	
00.3	Design Release	-							Approved	Date (YYYY/MM/DD)				23-0120	
Changed	Date (YYYY/MM/DD)								Karabon	2024/07/23				Format A2	
Van Hulst	2024/06/13													Sheet 1 / 1	
Approved	Date (YYYY/MM/DD)							HellermannTyton		Drawing-No		23-0120-001-CSU			
Karabon	2024/07/23							www.HellermannTyton.com							