

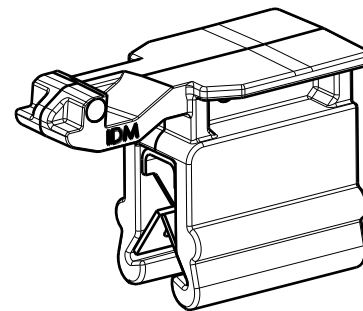


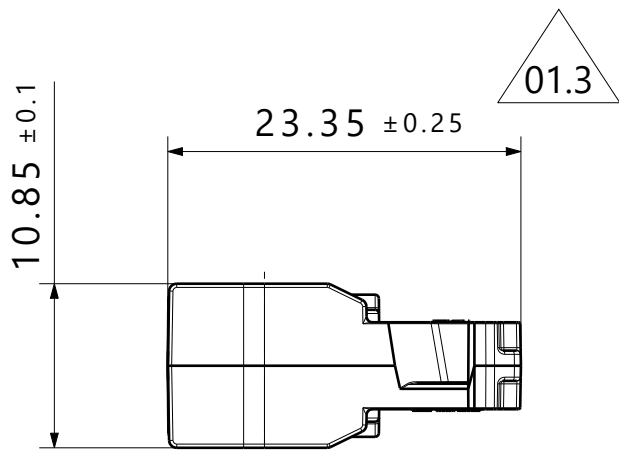


Isometric View


'TCA' to be located
on this surface

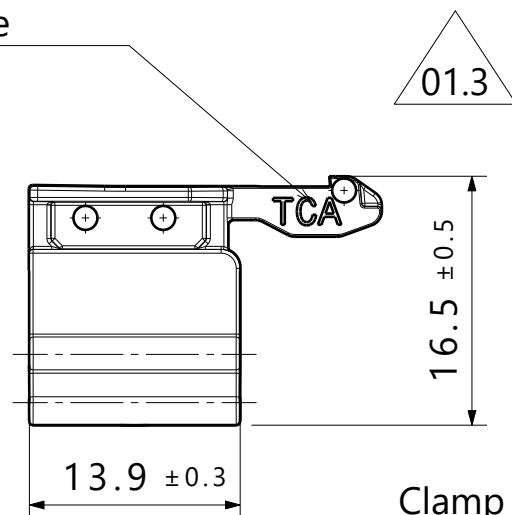

Clamp TE4-511-000-K
Clamp fit for material
thickness 1-3mm

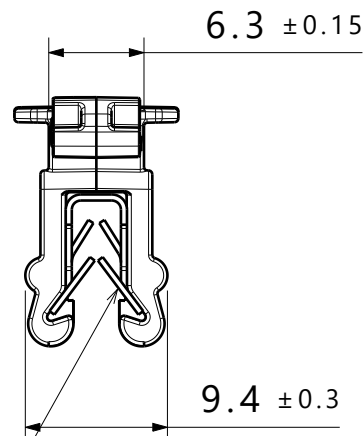

Cavity ID and Country
of Origin to be located
on this surface

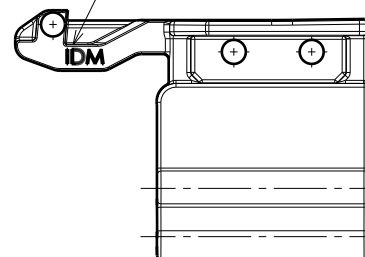

Reference:

Performance requirements at dry as molded per SAE/USCAR-44:

1. Connector clip push on force: 60 newtons max
2. Connector clip pull off force: 110 newtons min
3. Connector clip 90° pull off force: 110 newtons min

Notes:

1. Material: See chart
2. Material color: See chart
3. Maximum percent regrind permissible: 25%
4. Max allowable flash to be: 0.25mm
5. Max allowable mismatch to be: 0.1mm
6. Fits into USCAR clip slot specification EWCAP-005-11.

Global Part Description	Material	Color
EC6CC11-PA66HIRHSUV-BK	PA66HIRHSUV	Black

Revision Level			Revision Record				Drawn		Date (YYYY/MM/DD)		Title Edge Clip with 11mm Connector Clip			Scale 2:1		
Drawing	State	Part	ECN 310250				The copyright of this drawing is reserved by HellermannTyton.		Duncan					2023/05/23		Global Project Number 23-0132
01.3	Design Release	-			Approved				Date (YYYY/MM/DD)		Van Hulst <th colspan="2">2023/05/23</th>		2023/05/23		Format A3	
Changed		Date (YYYY/MM/DD)			All drawing revisions are stored in CAD PDM database				Units mm HellermannTyton www.HellermannTyton.com		Drawing-No 23-0132-001-CSU			Sheet 1 / 1		
Duncan		2023/10/03														
Approved		Date (YYYY/MM/DD)														
Cottrill		2023/10/03														