




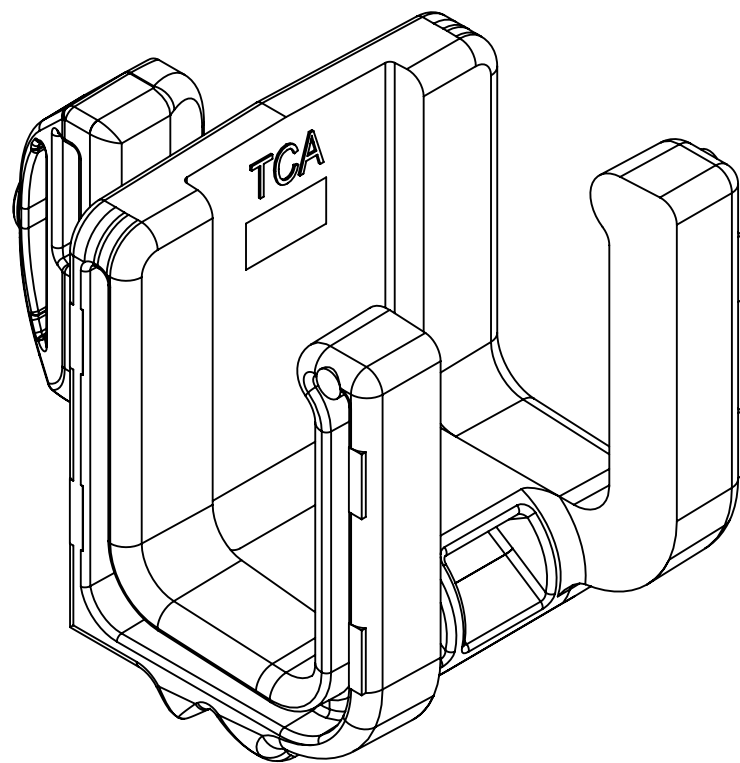


Vertical Face Orientation
Scale 3 : 1

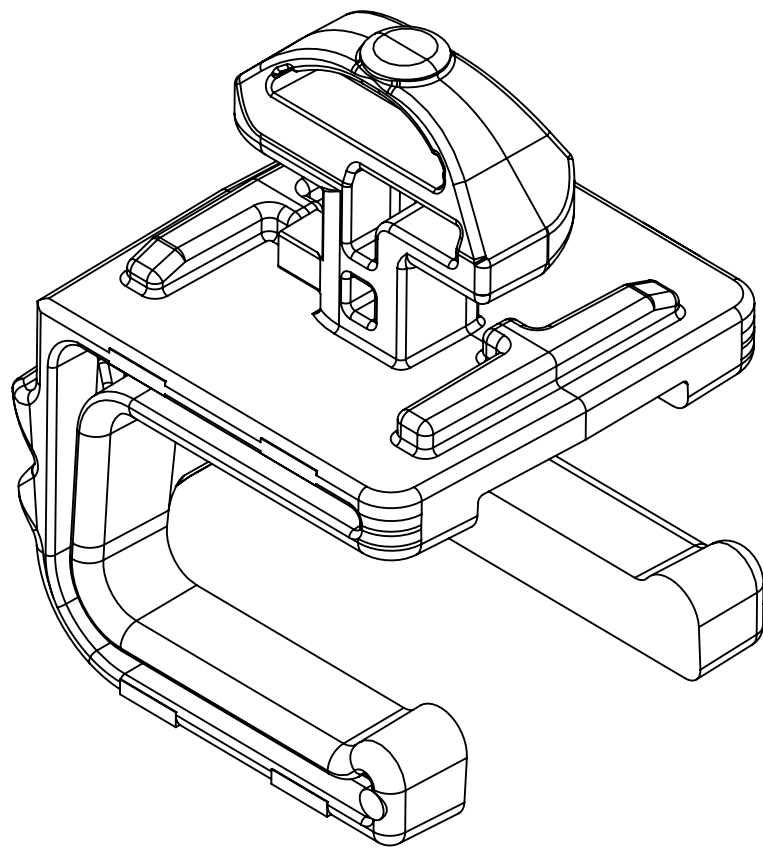

Downward Face Orientation
Scale 3 : 1

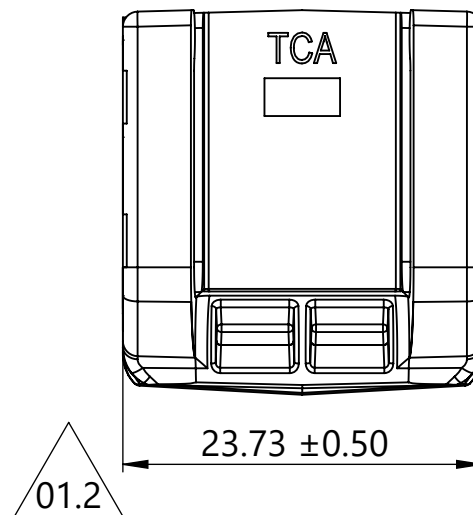

01.2

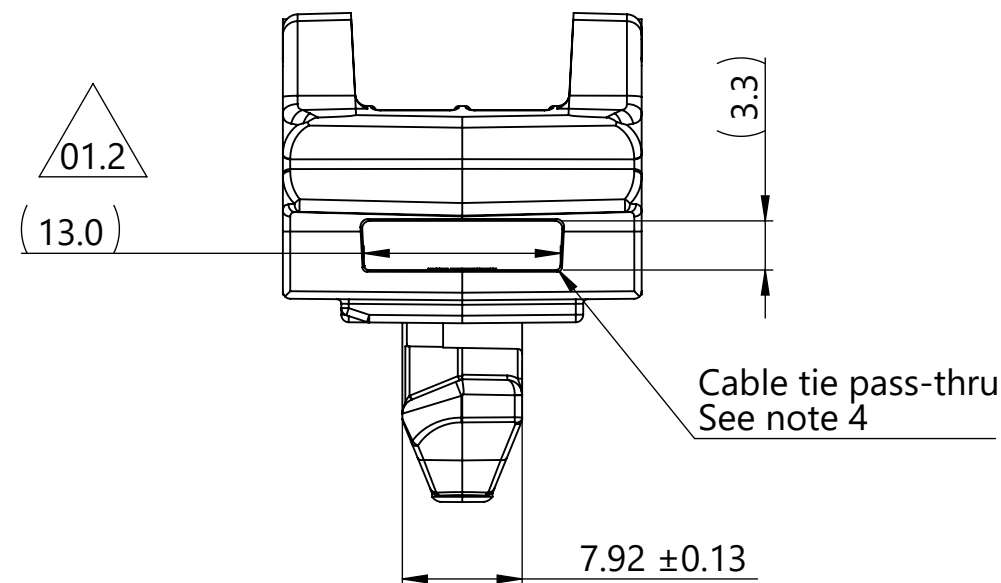

01.2


(13.0)

(3.3)

7.92 ±0.13

Cable tie pass-thru
See note 4

Cable tie CutZone

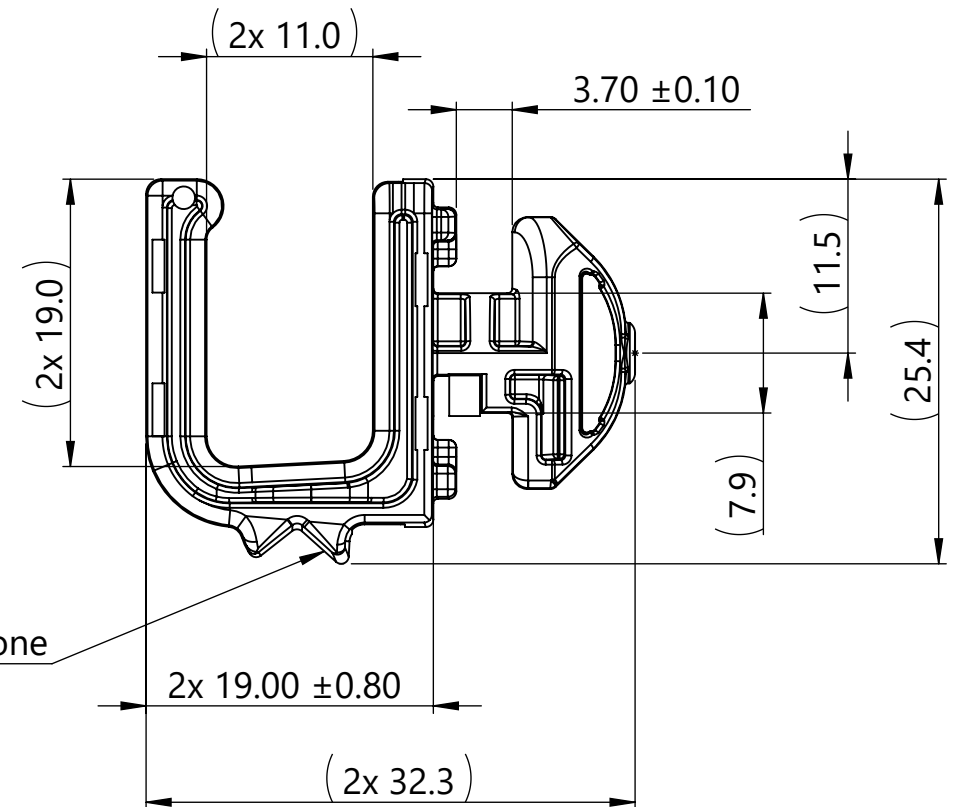

01.2

01.2

01.2

01.2

Performance notes:


1. PA66HIRHS(REC100) performance requirements are validated at dry as molded ($\leq 0.5\%$ H₂O by weight)
2. Load testing
 - A. Downward Face
 - a. 31 N [7 lbf] minimum without cable tie
 - b. 67 N [15 lbf] minimum with cable tie
 - B. Vertical Face
 - a. 67 N [15 lbf] minimum without cable tie
3. Applicable aluminum framing T-slot width: 8mm [.320in]
4. Accommodates cable tie series: T18 - T120
5. Accommodates 3/8in grip tie: GT.375

Notes:

1. Material: See chart
2. Material color: See chart
3. Maximum percent regrind permissible: 0%
4. Maximum allowable flash to be: 0.25mm
5. Maximum allowable mismatch to be: 0.10mm

Revision level		
Drawing	State	Part
01.2	Design Release	-
Changed	Date (YYYY/MM/DD)	
Mann	2024/07/08	
Approved	Date (YYYY/MM/DD)	
Uhler	2024/07/11	

Revision Record	
ECN 311337	



All drawing
revision are
stored in CAD
PDM database

The copyright of
this drawing is
reserved by
HellermannTyton.

Units
mm

Drawn	Date (YYYY/MM/DD)
Mann	2024/03/19
Approved	Date (YYYY/MM/DD)
Vaughn	2024/03/21

HellermannTyton
www.HellermannTyton.com

Part Description	Material	Color
CTCM11CZF-PA66HIRHS(REC100)-BK	PA66HIRHS(REC100)	Black

Title CTCM11CZF 11mm Cradle with Frame Mount and CutZone	Scale 2:1
	Global Project Number 23-0153
	Format A3
	Sheet 1/1
Drawing-No 23-0153-002-CSU	