


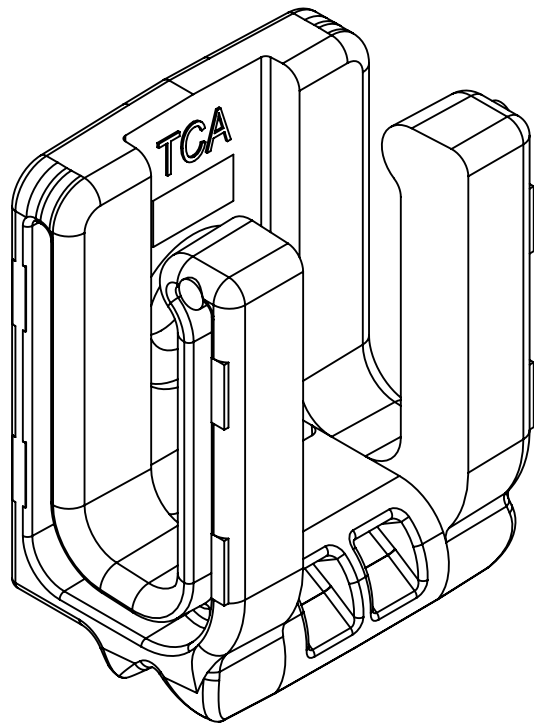
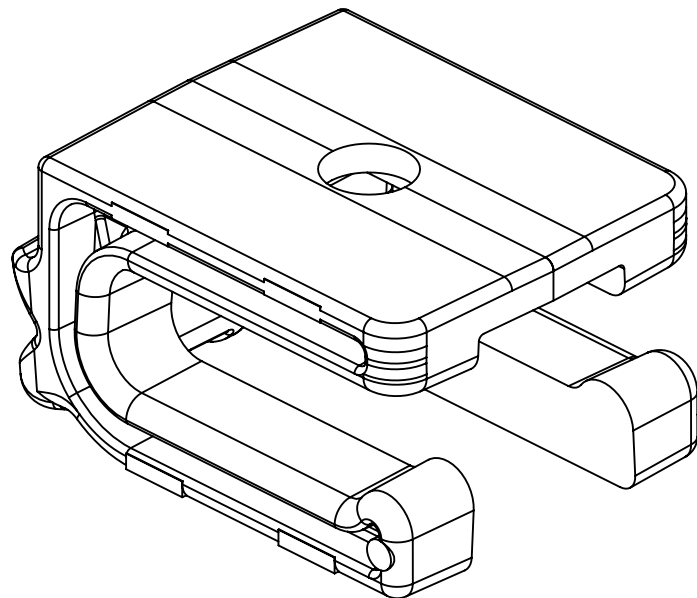


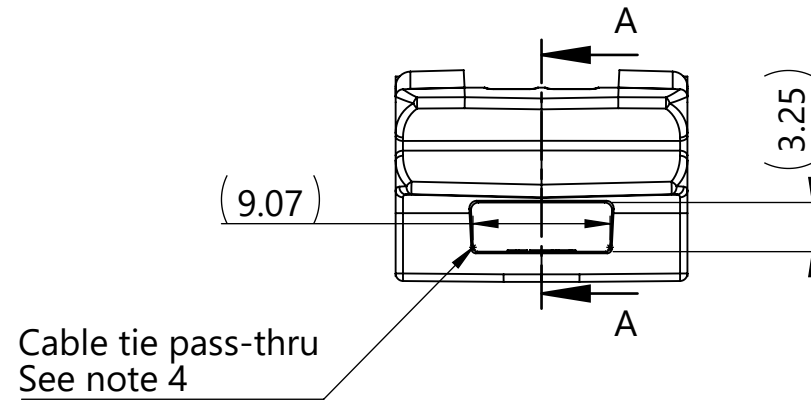


Vertical Face Orientation
Scale 3:1

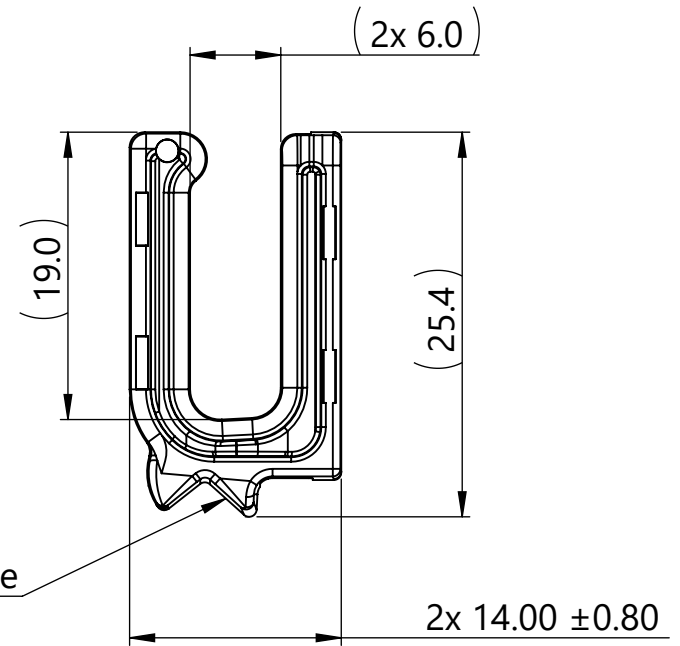

Downward Face Orientation
Scale 3:1

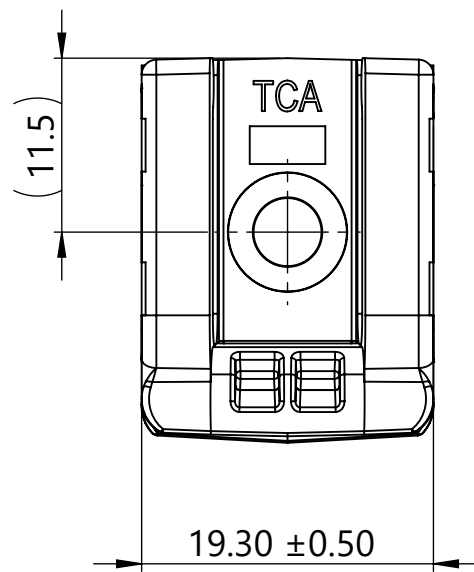

Cable tie pass-thru
See note 4

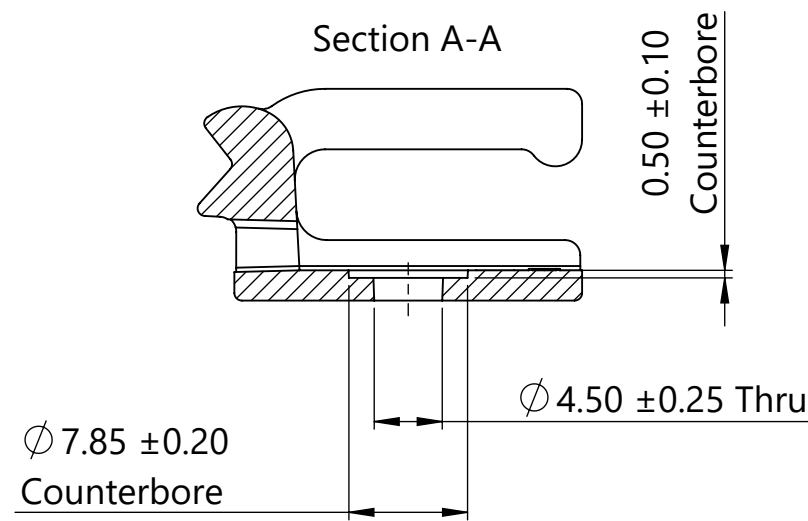

03.3

- Performance notes:
- PA66HIRHS(REC100), PA66STHS performance requirements are validated at dry as molded ($\leq 0.5\%$ H₂O by weight)
 - Load testing
 - Downward Face
 - 31 N [7 lbf] minimum without cable tie
 - 67 N [15 lbf] minimum with cable tie
 - Vertical Face
 - 67 N [15 lbf] minimum without cable tie
 - Mounting screw size:
 - M4
 - #8 [0.164in]
 - Accommodates cable tie series: T18 - T120


- Notes:
- Material: See chart
 - Material color: See chart
 - Maximum percent regrind permissible: 0%
 - Maximum allowable flash to be: 0.25mm
 - Maximum allowable mismatch to be: 0.10mm

03.3

03.3

Revision level		
Drawing	State	Part
03.3	Design Release	-
Changed	Date (YYYY/MM/DD)	
Mann	2024/07/08	
Approved	Date (YYYY/MM/DD)	
Uhler	2024/07/11	

Revision Record	
ECN 311244	



The copyright of this drawing is reserved by HellermannTyton.

Drawn	Date (YYYY/MM/DD)
Mann	2023/07/20
Approved	Date (YYYY/MM/DD)
Toll	2023/08/07

Part Description		Material	Color
CTCM6CZS-PA66HIRHS(REC100)-BK		PA66HIRHS(REC100)	Black
CTCM6CZS-PA66STHS-BK		PA66STHS	Black
Title CTCM6CZS 6mm Cradle with Screw Mount and CutZone			Scale 2:1
			Global Project Number 23-0156
Drawing-No 23-0156-001-CSU			Format A3
			Sheet 1/1

HellermannTyton
www.HellermannTyton.com