



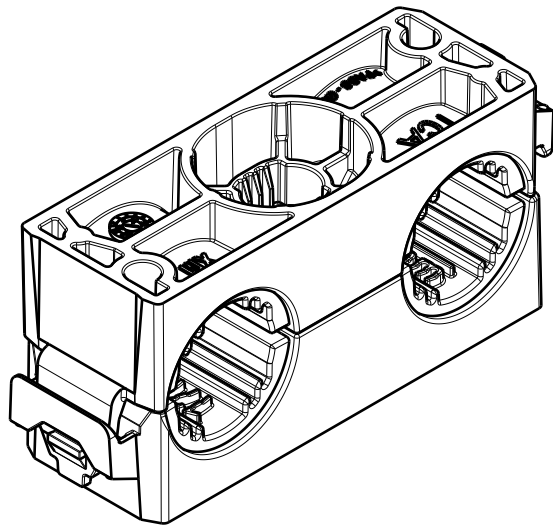

Assembled example isometric view


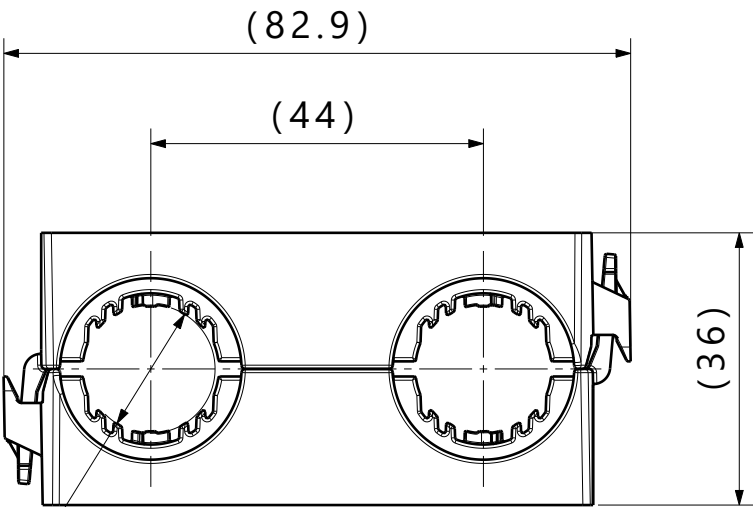


Assembled example front view


- Notes:
- 1. Material: See chart
 - 2. Material color: See chart
 - 3. Maximum percent regrind permissible: 0%
 - 4. Max allowable flash to be: 0.50mm
 - 5. Max allowable mismatch to be: 0.1mm
 - 6. Threaded stud length to be at least: 40mm
 - 7. Applicable stud size:

A. M8 x 1.25 Threaded

8. Two HDC17X2BASE clamp halves are required for a functional clamp assembly

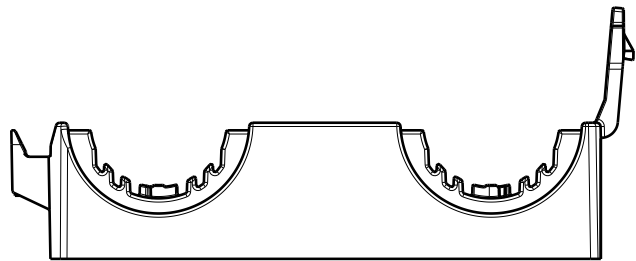

Delivery condition

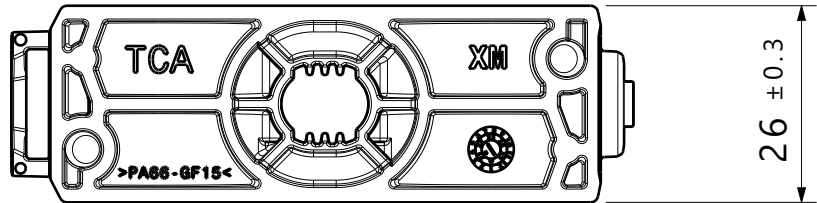

Global Part Description	Housing		
	Drawing	Material	Color
HDC17X2BASE-PA66GF15/TPE-BK	23-0181-005-CSU	PA66GF15/TPE	Black

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.	Drawn	Date (YYYY/MM/DD)	Title Dual clamp with 17mm hose cover			Scale	1:1
Drawing	State	Part	ECN 311190				Rohde	2023/12/13				Global Project Number	23-0181
01.1	Design Release			All drawing revisions are stored in CAD PDM database	Approved		Date (YYYY/MM/DD)	Drawing-No 23-0181-105-CSU	Format	A3			
Changed		Date (YYYY/MM/DD)			Van Hulst		2023/12/13		Sheet	1 / 1			
Rohde		2024/05/30											
Approved		Date (YYYY/MM/DD)											
Van Hulst		2024/05/30					Units	mm	HellermannTyton				
							www.HellermannTyton.com						