




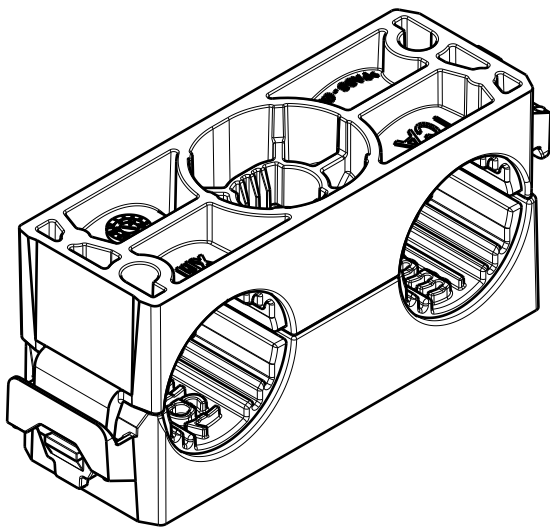


Assembled example isometric view


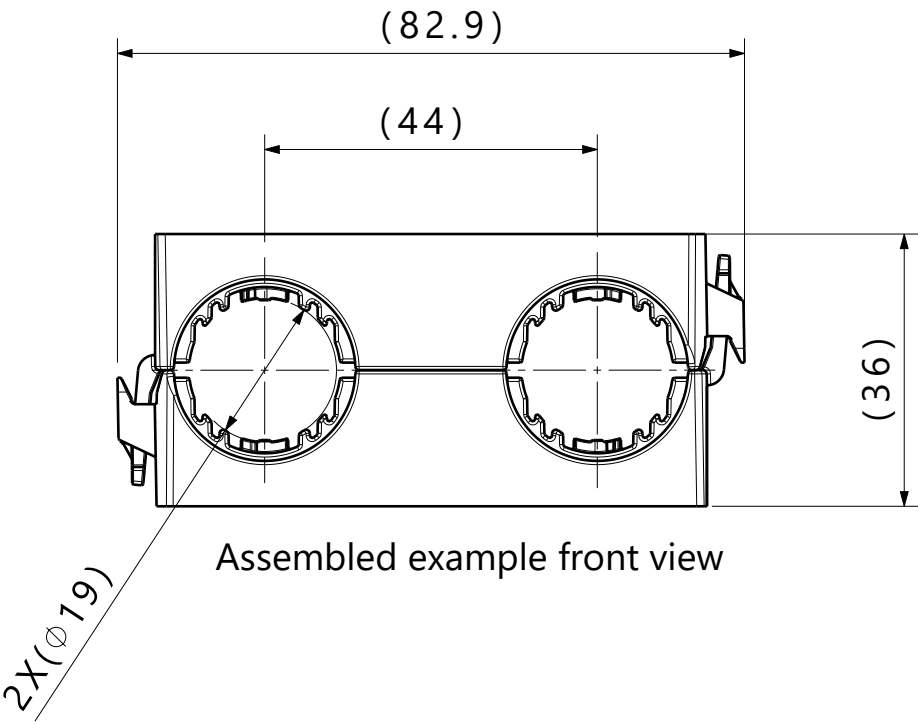


Assembled example front view

- Notes:
- 1. Material: See chart
 - 2. Material color: See chart
 - 3. Maximum percent regrind permissible: 0%
 - 4. Max allowable flash to be: 0.50mm
 - 5. Max allowable mismatch to be: 0.1mm
 - 6. Threaded stud length to be at least: 40mm
 - 7. Applicable stud size:
 - A. M8 x 1.25 Threaded
 - 8. Two HDC19X2BASE clamp halves are required for a functional clamp assembly

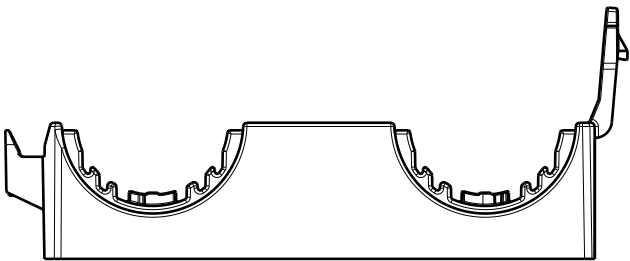

Delivery condition

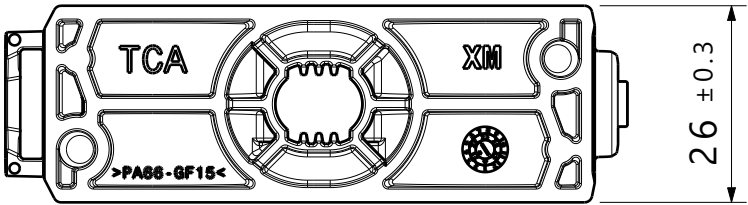

Global Part Description	Housing		
	Drawing	Material	Color
HDC19X2BASE-PA66GF15/TPE-BK	23-0182-005-CSU	PA66GF15	Black

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.	Drawn	Date (YYYY/MM/DD)	Title			Scale
Drawing	State	Part	ECN 311190				Rohde	2023/12/13				
01.1	Design Release				All drawing revisions are stored in CAD PDM database		Approved	Date (YYYY/MM/DD)	Global Project Number			
Changed	Date (YYYY/MM/DD)			Van Hulst			2023/12/13	23-0182				
Rohde	2024/05/30			Units		HellermannTyton	Drawing-No	Format				
Approved	Date (YYYY/MM/DD)			mm	23-0182-105-CSU				A3			
Van Hulst	2024/05/30				www.HellermannTyton.com	Sheet	1 / 1					