


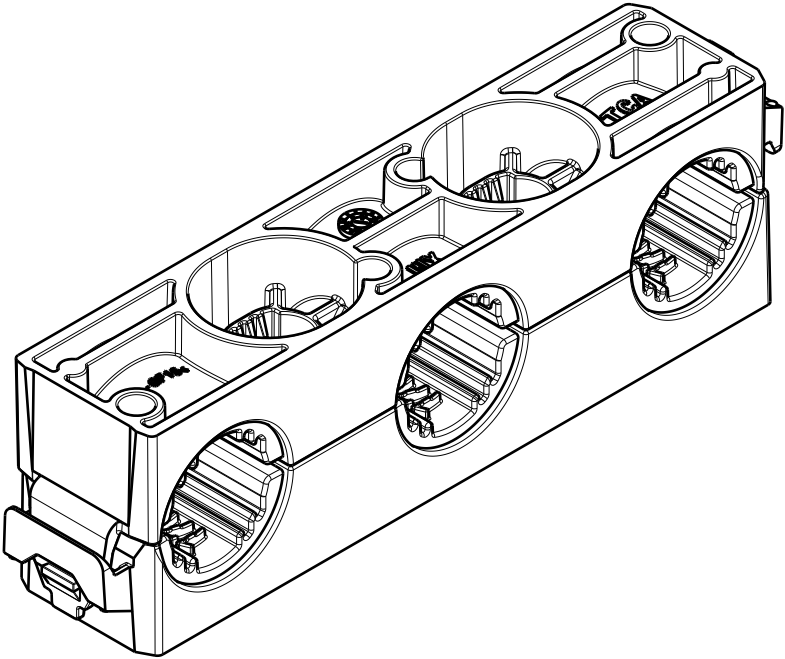
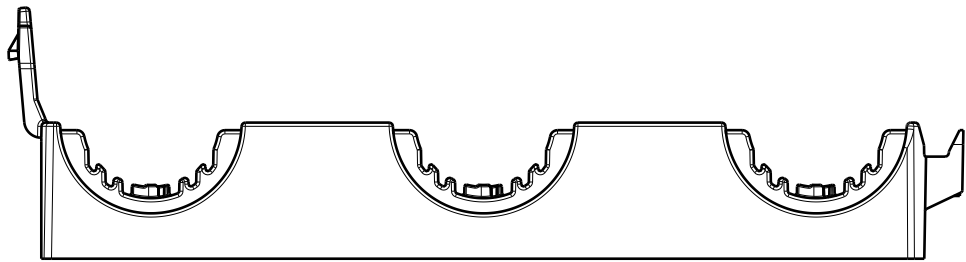


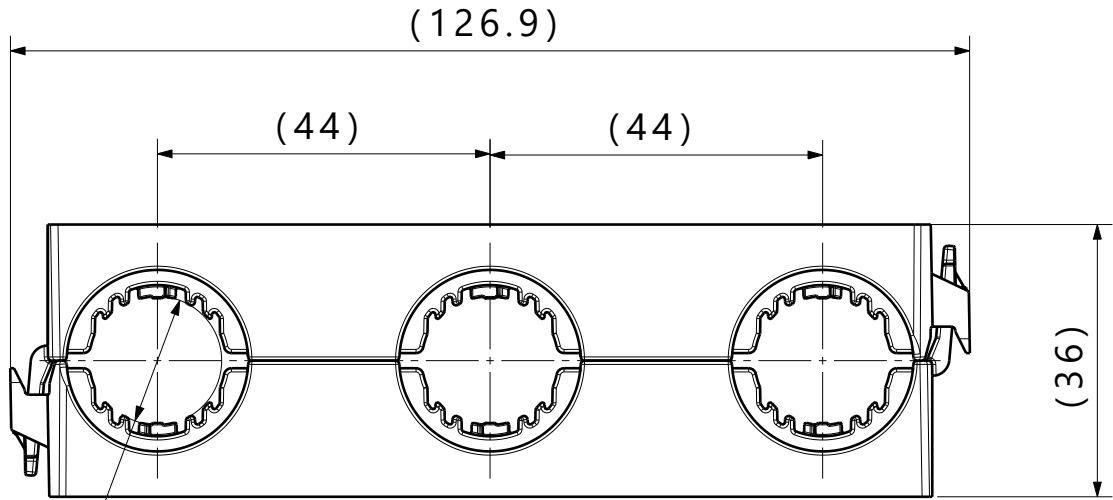

Assembled example isometric view

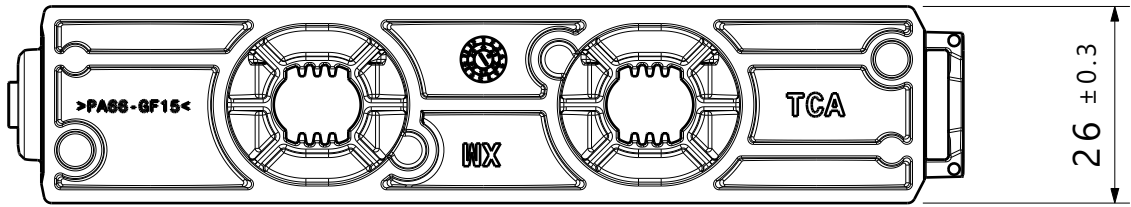


Delivery condition



Assembled example front view

- Notes:
1. Material: See chart
 2. Material color: See chart
 3. Maximum percent regrind permissible: 0%
 4. Max allowable flash to be: 0.50mm
 5. Max allowable mismatch to be: 0.1mm
 6. Threaded stud length to be at least: 40mm
 7. Applicable stud size:
 - A. M8 x 1.25 Threaded
 8. Two HDC17X3BASE clamp halves are required for a functional clamp assembly



Global Part Description	Housing		
	Drawing	Material	Color
HDC17X3BASE-PA66GF15/TPE-BK	23-0183-005-CSU	PA66GF15/TPE	Black

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.	Drawn	Date (YYYY/MM/DD)	Title		Scale
Drawing	State	Part	ECN 311190				Rohde	2023/12/13			1:1
01.1	Design Release			All drawing revisions are stored in CAD PDM database	Approved		Date (YYYY/MM/DD)	Triple clamp with 17mm hose cover		Global Project Number	
Changed		Date (YYYY/MM/DD)			Van Hulst		2023/12/13			23-0183	
Rohde		2024/05/30			Units mm HellermannTyton www.HellermannTyton.com		Drawing-No			Format	
Approved		Date (YYYY/MM/DD)					23-0183-105-CSU			A3	
Van Hulst		2024/05/30							Sheet	1 / 1	

Units
mm

HellermannTyton
www.HellermannTyton.com

Drawing-No
23-0183-105-CSU