

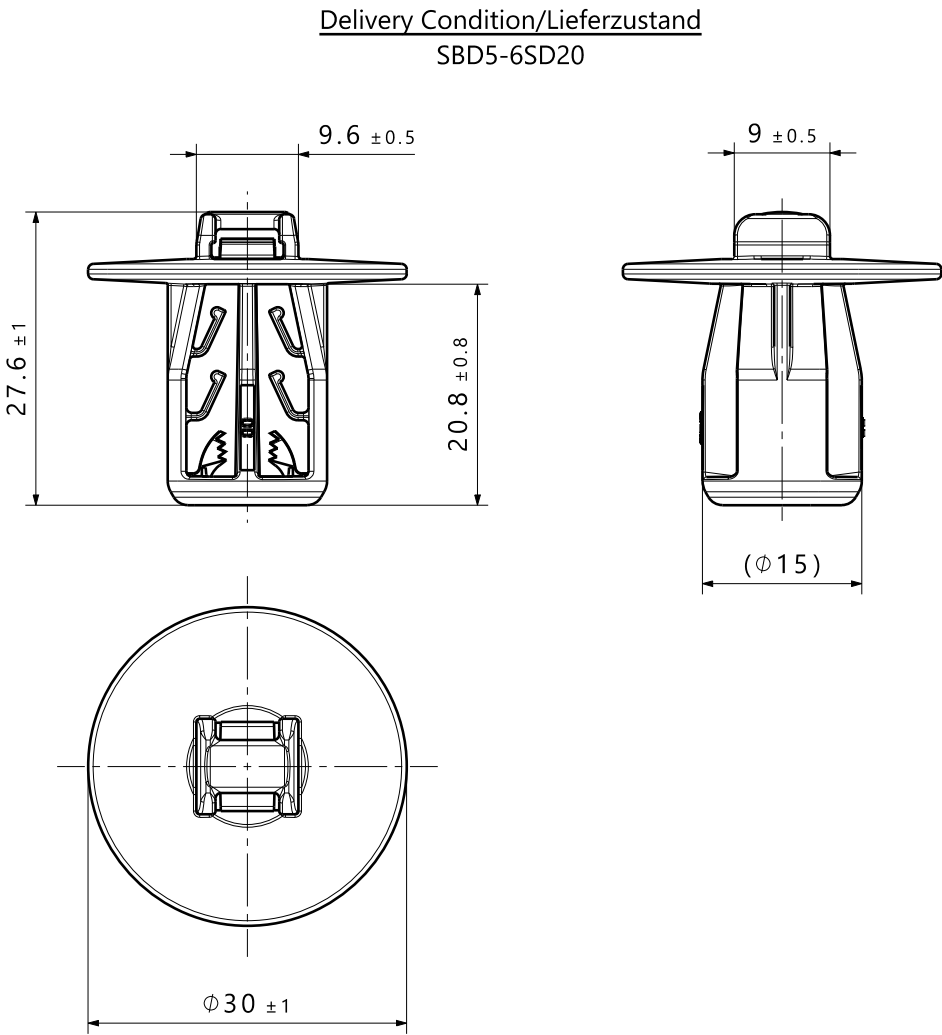


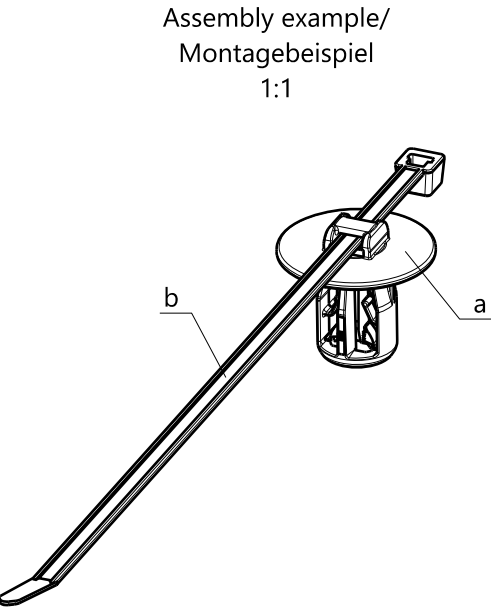

Specification:		Spezifikation:	
- Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH		- Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH	
- Material:	a:	- Material:	a:
	PA6.6 heatstabilized impact modified		PA6.6 hitzestabilisiert, schlagzaeh modifiziert
- Material color:	b:	- Material Farbe:	b:
	PA6.6 heatstabilized impact modified		PA6.6 hitzestabilisiert, schlagzaeh modifiziert
- Material color:	a:	- Groesse	a:
	black		Schweissbolzen: M5 x 0,8
- Material color:	b:	- Groesse	b:
	black		Schweissbolzen: M6 x 1
- Welded stud size:	M5 x 0,8	- Mindesthoehe	a:
	M6 x 1		Schweissbolzen: M5 x 0,8
- Min. height welded stud:	T5	- Mindesthoehe	b:
	T6		Schweissbolzen: M6 x 1
- Min. height welded stud:	10 mm	- Mindesthoehe	a:
	10 mm		Schweissbolzen: M5 x 0,8
- Bundle Ø:	1 - 45 mm	- Mindesthoehe	b:
	min. 225 N		Schweissbolzen: M6 x 1
- Tensile force:	min. 225 N	- Mindesthoehe	a:
	min. 225 N		Schweissbolzen: M5 x 0,8

Delivery Condition/Lieferzustand
Cable tie T50R/Kabelbinder T50R

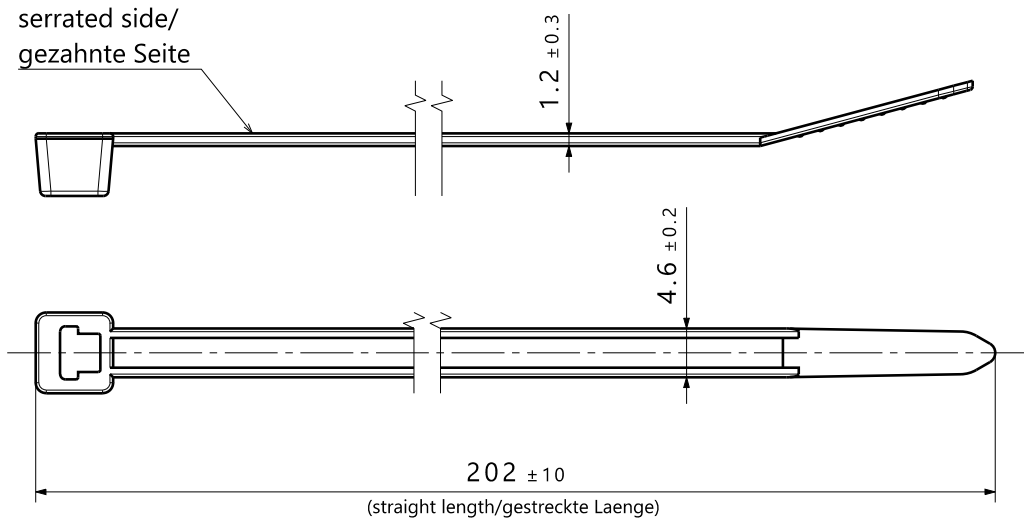

Printed copy for information only/
Ausdruck nur zur Information

Product type/ Artikelbezeichnung	Project no./ Projektnr.	Project no./ Projektnr.	
		SBD5-6SD20	T50R
T50RSBD5-6SD20SET	GPN 23-1451	X	X

Revision Level			Revision Record				The copyright of this drawing is reserved by HellermannTyton.	Drawn		Date (YYYY/MM/DD)	Title			Scale	
Drawing	State	Part						I. Langeloh	2025/03/04	Approved					
01.7	Design Release	01				All drawing revisions are stored in CAD PDM database	Units mm	HellermannTyton		2025/03/04	T50RSBD5-6SD20SET			2:1	
Changed		Date (YYYY/MM/DD)												Global Project Number 23-1451	
Approved		Date (YYYY/MM/DD)								Drawing-No 23-1451-001-CSG			Format A2		
													Sheet 1 / 1		