


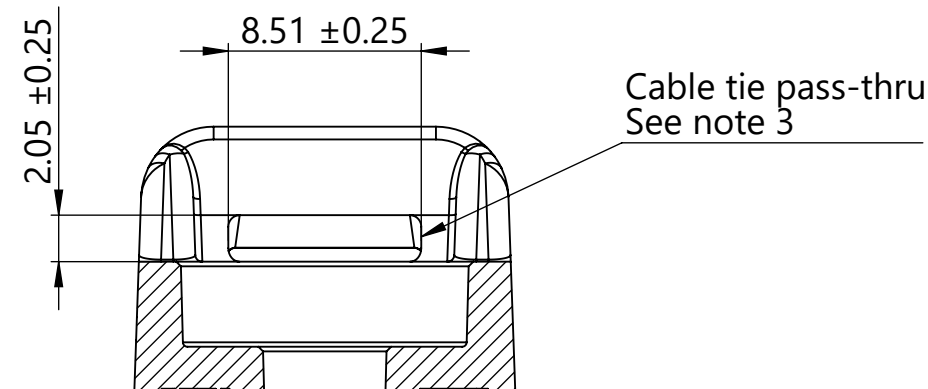
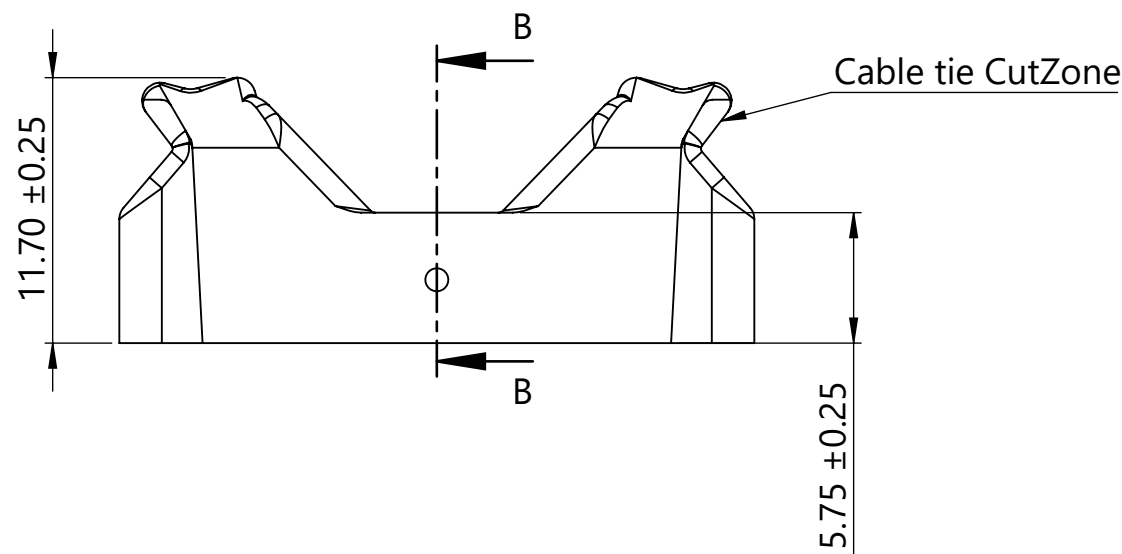
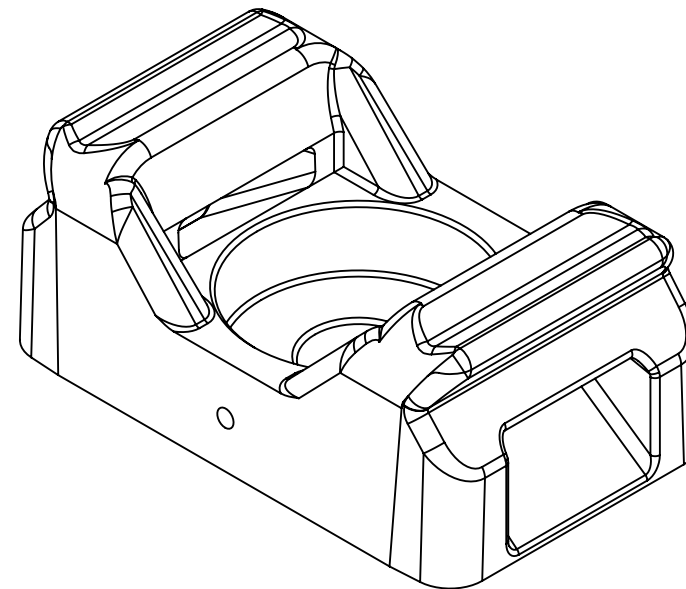


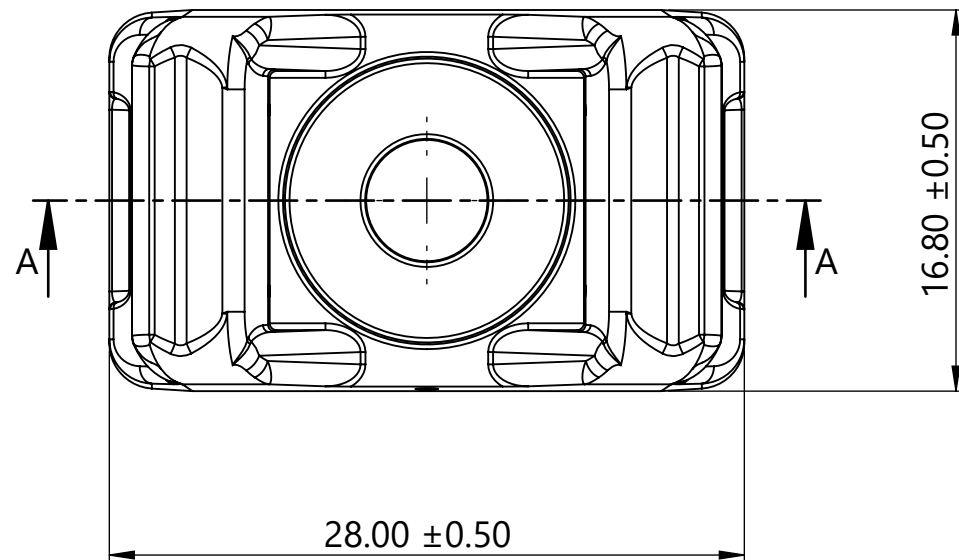

Section B-B

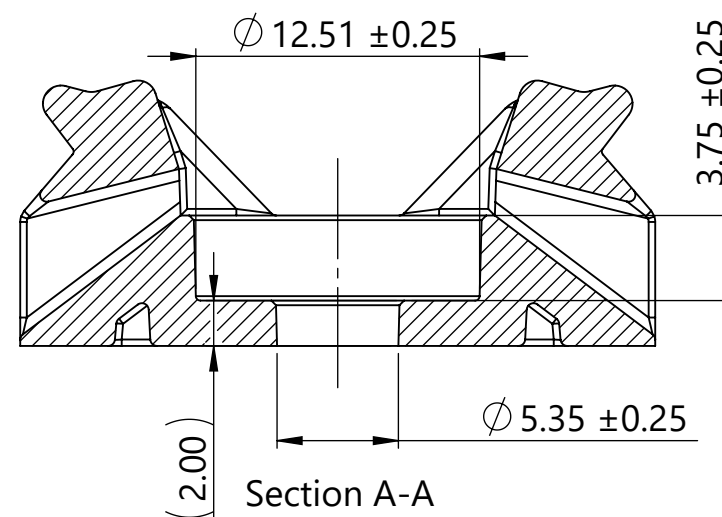

Section A-A

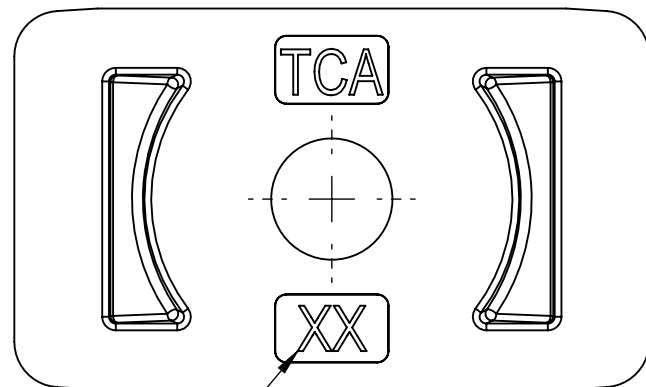

XX = Cavity Number

Performance notes:


1. PA66HS performance requirements are validated at 50% relative humidity equilibrium ($2.5 \pm 0.25\%$ H₂O by weight)
2. Mounting Screw Size:
 1. #10 [.190in]
 2. M5
3. Accommodates cable tie series: T18 - T120

Notes:

1. Material: See chart
2. Material color: See chart
3. Maximum percent regrind permissible: 25%
4. Maximum allowable flash to be: 0.25mm
5. Maximum allowable mismatch to be: 0.10mm

Revision level		
Drawing	State	Part
01.1	Design Release	-
Changed	Date (YYYY/MM/DD)	
Mann	2024/03/07	
Approved	Date (YYYY/MM/DD)	
Vaughn	2024/03/07	

Revision Record	
ECN 310293	



The copyright of this drawing is reserved by HellermannTyton.

All drawing revision are stored in CAD PDM database

Units
mm

Drawn	Date (YYYY/MM/DD)
Mann	2023/08/18
Approved	Date (YYYY/MM/DD)
Vaughn	2023/09/12

HellermannTyton
www.HellermannTyton.com

Global Part Description		Material	Color
CTSM3CZS-PA66HS-BK		PA66HS	Black
Title CTSM3CZS Cable Tie Mount		Scale 3:1	
		Global Project Number 23-1478	
Drawing-No 23-1478-003-CSU		Format A3	
		Sheet 1/1	